



State of New Jersey

DEPARTMENT OF ENVIRONMENTAL PROTECTION

Bureau of Nonpoint Pollution Control

Division of Water Quality

Post Office Box 029

Trenton, New Jersey 08625-029

609-633-7021 Fax: 609-984-2147

http://www.state.nj.us/dep/dwq/bnpc_home.htm

JOHN S. CORZINE
Governor

MARK N. MAURIELLO
Acting Commissioner

September 2, 2009

J. Kelly Williamson
2733 Kanasita Drive, Suite B
Chattanooga, TN 37343

Re: Addendum of Conditional Interim Certification (CIC) for the Aqua-Swirl Concentrator
by AquaShield Inc.

Expiration Date: May 15, 2011

Dear Mr. Williamson:

The Department has reviewed your June 12, 2008 letter to New Jersey Corporation for Advanced Technology (NJCAT). In the letter you requested that the Department to give recognition to volumetric sizing criteria for the Aqua-Swirl™ Concentrator.

The Department concurs with the table listed below entitled: "Aqua-Swirl™ Concentrator Volumetric Sizing Chart". As of this letter the Department is replacing the Table in the Conditional Interim Certification Findings entitled: "Aqua-Swirl™ Concentrator Models at 50% of Original Treatment Flow" with the below table.

Table 1: Aqua-Swirl™ Concentrator Volumetric Sizing Chart

Unit	Inner Diameter (ft)	Depth (ft)	Volume (ft3)	Volumetric Loading Rate (gpm/ft3)	Water Quality Treatment Flow (cfs)
AS-2	2.5	3	14.7	9.1	0.3
AS-3	3.25	5.5	45.6	9.1	0.9
AS-4	4.25	5.5	78	9.1	1.6
AS-5	5	5.5	108	9.1	2.2
AS-6	6	6	170	9.1	3.4
AS-7	7	7	269	9.1	5.5
AS-8	8	8	402	9.1	8.2
AS-9	9	9	573	9.1	11.6
AS-10	10	10	785	9.1	15.9
AS-12	12	12	1360	9.1	27.5

Additional information regarding the implementation of the Stormwater Management Rules N.J.A.C. 7:8 are available at www.njstormwater.org. If you have any questions regarding the above information, please contact Ms. Sandra Blick of my office at (609) 633-7021.

Sincerely,

A handwritten signature in black ink that reads "Barry Chalofsky for B.C." The signature is written in a cursive, flowing style.

Barry Chalofsky, P.P., Chief
Bureau of Nonpoint Pollution Control

c: Tom Micai, NJDEP
Mary Beth Brenner, NJDEP
Rhea Weinberg Brekke, NJCAT



State of New Jersey

DEPARTMENT OF ENVIRONMENTAL PROTECTION

Bureau of Nonpoint Pollution Control

Division of Water Quality

Post Office Box 029

Trenton, New Jersey 08625-029

609-633-7021 Fax: 609-984-2147

http://www.state.nj.us/dep/dwq/bnpc_home.htm

JON S. CORZINE
Governor

MARK N. MAURIELLO
Acting Commissioner

May 27, 2009

J. Kelly Williamson
2733 Kanasita Drive, Suite B
Chattanooga, TN 37343

Re: Extension of Conditional Interim Certification for the Aqua-Swirl Concentrator by AquaShield Inc.

Expiration Date: May 15, 2011

Dear Mr. Williamson:

The Stormwater Management Rules under N.J.A.C. 7:8-5.5(b) and 5.7(c) allow the use of manufactured treatment devices (MTDs) for compliance with the design and performance standards at N.J.A.C. 7:8-5 if the pollutant removal rates have been verified by New Jersey Corporation for Advanced Technology and have been certified by the New Jersey Department of Environmental Protection (NJDEP).

The certification process has been revised. The revised process places MTDs into five categories. The Aqua-Swirl Concentrator by AquaShield Inc. has been qualified for Category II, MTDs with Interim Certifications.

The NJDEP received the maintenance plan required under Category II and acknowledges that the requirements for this category are met; therefore, the expiration of the interim certification letter dated November 28, 2005 has been extended until May 15, 2011.

The Department anticipates proposing further adjustments to this process through the readoption of the Stormwater Management Rules. Additional information regarding the implementation of the Stormwater Management Rules N.J.A.C. 7:8 are available at www.njstormwater.org. If you have any questions regarding the above information, please contact Ms. Sandra Blick of my office at (609) 633-7021.

Sincerely,

Barry Chalofsky, P.P., Chief
Bureau of Nonpoint Pollution Control

April 6, 2008

Addendum to the AquaShield's Aqua-Swirl™ Concentrator
Conditional Interim Certification

Based on the progress made in the field testing phase, the NJDEP is approving the request for an extension of the Conditional Interim Certification of the AquaShield's Aqua-Swirl™ Concentrator. The Conditional Interim Certification is extended until **March 31, 2009** to complete the field test. AquaShield must submit quarterly reports showing progress of the field test to the NJDEP and NJCAT.



State of New Jersey

Department of Environmental Protection

Division of Science, Research and Technology

Bureau of Sustainable Communities & Innovative Technologies

PO Box 409

Trenton, NJ 08625-0409

Tel: 609-292-9692

FAX: 609-292-7340

Richard J. Codey
Acting Governor

Bradley M. Campbell
Commissioner

November 28, 2005

J. Kelly Williamson
President
AquaShield™ Inc.
2733 Kanasita Drive, Suite B
Chattanooga, TN 37343

RE: Conditional Interim Certification of AquaShield's Aqua-Swirl™ Concentrator.

Dear Mr. Williamson:

In accordance with the Energy and Environmental Technology Verification (EETV) Act at N.J.S.A. 13:1D-134, the New Jersey Department of Environmental Protection (NJDEP) is pleased to issue a **Conditional Interim Certification** for the Aqua-Swirl™ Concentrator developed by AquaShield, Inc. This conditional interim certification is being issued pursuant to this program's receipt and review of the New Jersey Corporation for Advanced Technology (NJCAT) verification report for the Aqua-Swirl™ Concentrator, dated September 2005. **This certification letter must be used in conjunction with the enclosed Interim Certification Findings document.**

According to NJCAT's verification report, and as indicated in the attached Conditional Interim Certification Findings, the Aqua-Swirl™ Concentrator, model AS-3, has been shown to have a total suspended solids (TSS) removal efficiency (as measured as suspended sediment concentration (SSC)) of 60% when operated at 60% of its water quality treatment flow using OK-110 unground silica with a d₅₀ particle size of 110 microns, an average influent concentration of 320 mg/L and zero initial sediment loading in laboratory studies using simulated stormwater.

Based on the demonstrated laboratory performance, the NJDEP feels confident that the Aqua-Swirl™ Concentrator has the capability of achieving, in field applications, a TSS removal efficiency of 50%. Therefore, NJDEP certifies that the Aqua-Swirl™ Concentrator is capable of achieving a TSS removal efficiency of **50%**, while operating at **50% of the maximum designed flow rates**, and shall be permitted accordingly. In addition, the various models of the Aqua-Swirl™ Concentrator that are also capable of achieving TSS removal efficiencies of 50% from stormwater runoff at the respective maximum designed flow rates are given in **Table 1** of the enclosed Conditional Interim Certification Findings document. The following conditions shall apply to the Conditional Interim Certification:

1. The Aqua-Swirl™ Concentrator should be the first component if used as part of a treatment train (i.e., utilized in front of best management practices such as detention, retention, and infiltration basins, etc., as defined in the NJ Stormwater Best Management Practices Manual). Use of this device in series with other manufactured treatment devices can only be approved by the Land Use Regulation Program and/or the Division of Watershed Management.
2. The Aqua-Swirl™ Concentrator shall be designed in accordance with New Jersey's water quality design storm, as required in the Stormwater Management Rules (N.J.A.C. 7:8).
3. A Quality Assurance Project Plan supporting the Technology Acceptance and Reciprocity Partnership (TARP) Tier II Protocol for Stormwater Best Management Practice Demonstration (July, 2003), and including any additional field testing requirements that the NJDEP shall request, shall be submitted to NJDEP and/or NJCAT within six (6) months from the date of this Conditional Interim Certification letter.
4. Field evaluation data that are consistent with the Tier II Protocol and any additional NJDEP requirements shall be submitted to NJDEP and/or NJCAT by June 30, 2007.
5. The appropriate devices satisfying site selection and sizing criteria must be consistent with the specifications as described in **Table 1**.

Please note that this approval letter shall expire on December 31, 2007, unless extended by NJDEP. For final certification of the Aqua-Swirl™ Concentrator, verified data must be generated from a full-scale field demonstration utilizing the TARP Tier II Protocol and additional NJDEP field testing requirements. If you have any questions about this Conditional Interim Certification, please contact Ravi Patraju of my staff at (609) 292-0125.

Sincerely,



Martin Rosen
Chief - Bureau of Sustainable Communities
and Innovative Technologies, DSRT

Enclosure

c: Lisa Jackson, Assistant Commissioner, Land Use Management
Sam Wolfe, Assistant Commissioner, Environmental Regulation
Larry Baier, Director, Division of Watershed Management
Eileen Murphy, Director, Division of Science, Research, and Technology
Mark Mauriello, Director, Land Use Regulation Program
Narinder Ahuja, Director, Division of Water Quality
Rhea Brekke, Executive Director, New Jersey Corporation for Advanced Technology

Conditional Interim Certification Findings

NJDEP Technology Certification Program:

Bureau of Sustainable Communities & Innovative Technologies
Division of Science, Research & Technology
401 E State Street
P.O. Box 409
Trenton, NJ 08625
(609) 292-9692

Stormwater Manufactured Treatment Device:

Aqua-Swirl™ Concentrator by AquaShield™ Inc.

Applicant Information:

AquaShield™ Inc.
2733 Kanasita Drive, Suite B
Chattanooga, TN 37343
Phone #: (423) 870-8888
Fax #: (423) 826-2112

Technology Description:

The patented Aqua-Swirl™ Concentrator, which is constructed of High-Density Polyethylene (HDPE), provides for the removal of sediment, floating debris, and free-oil. Free-floating oil and floatable debris can be removed directly through the 30” service access provided on the Aqua-Swirl™ Concentrator. When the sediment pile is within 30” to 36” of the water surface, cleaning is required, and vacuum trucks can be used to remove the accumulated sediment and debris. The entire sediment storage area can be accessed with a vacuum hose from the surface.

Treatment begins when stormwater enters the Aqua-Swirl™ Concentrator through its tangential inlet pipe, which results in a circular (or vortex) flow pattern. The Aqua-Swirl™ Concentrator retains water between storm events providing both “quiescent and dynamic” settling of inorganic solids. The dynamic settling occurs during each storm event, while the quiescent settling takes place between successive storms. A combination of gravitational and hydrodynamic drag forces results in solids dropping out of the flow and migrating to the center of the chamber where velocities are the lowest. The treated flow exits the Aqua-Swirl™ Concentrator behind the arched outer baffle. The top of the baffle is sealed across the treatment channel, which prevents floatable pollutants from escaping the system. A vent pipe is extended up the riser to expose the backside of the baffle to atmospheric conditions, preventing a siphon from forming at the bottom of the baffle.

As indicated in the New Jersey Corporation of Advanced Technology's verification report, the Aqua-Swirl™ Concentrator, schematically described in figure 1, can provide full treatment of the "first flush" or the determined water quality flow while the peak design storm is diverted and channeled through the main conveyance pipe. The Aqua-Swirl™ Concentrator is designed so that it can easily be used for retrofit applications, and with the invert of the inlet and outlet pipe at the same elevation, the Aqua-Swirl™ Concentrator can easily be connected directly to the existing storm conveyance drainage system.

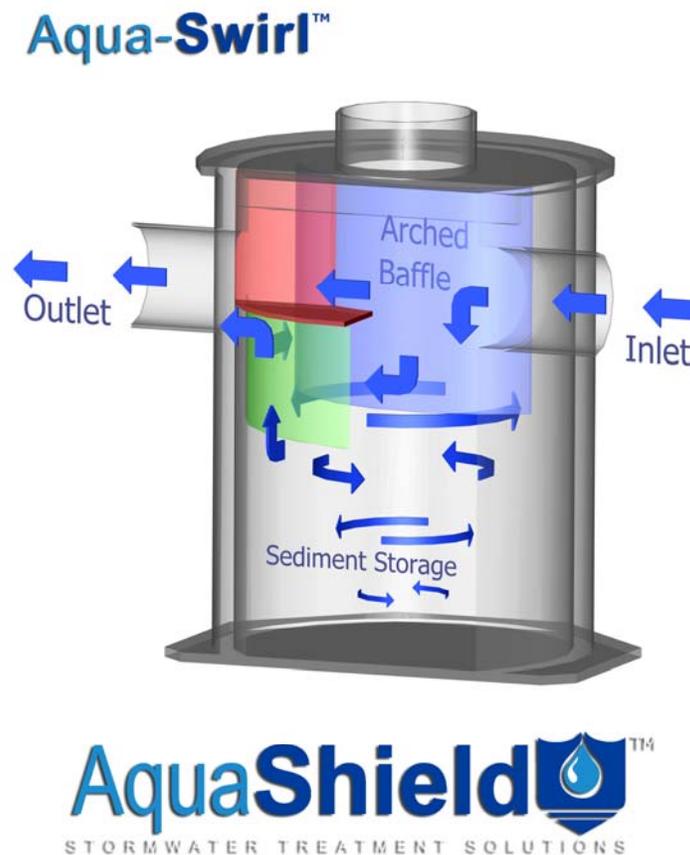


Figure 1. Aqua-Swirl™ Concentrator

New Jersey Corporation for Advanced Technology (NJCAT) Verified Claim:

The Aqua-Swirl™ Concentrator, model AS-3, has been shown to have a total suspended solids (TSS) removal efficiency (as measured as suspended sediment concentration (SSC)) of 60% when operated at 60% of its water quality treatment flow using OK-110 unground silica with a d_{50} particle size of 110 microns, an average influent concentration

of 320 mg/L and zero initial sediment loading in laboratory studies using simulated stormwater.

Technology Limitations/Concerns:

- Lack of maintenance may cause the system to operate at a reduced efficiency, and over time the system could become totally filled with sediment.
- Heavy loads of sediment would require an increased maintenance frequency.
- The Aqua-Swirl™ Concentrator's design allows for the accumulation of standing water in the lower chamber, which can be a breeding site for mosquitoes.

NJDEP Conditional Interim Certification:

Based on the demonstrated laboratory performance, the NJDEP feels confident that the Aqua-Swirl™ Concentrator has the capability of achieving, in field applications, a TSS removal efficiency of 50%. Therefore, NJDEP certifies that the Aqua-Swirl™ Concentrator is capable of achieving a TSS removal efficiency of 50%, while operating at 50% of the maximum designed flow rates. In addition, the various models of the Aqua-Swirl™ Concentrator that are also capable of achieving TSS removal efficiencies of 50% from stormwater runoff at the respective maximum designed flow rates are given in **Table 1**, and shall be permitted accordingly. The following conditions shall apply to the Conditional Interim Certification:

1. The Aqua-Swirl™ Concentrator should be the first component if used as part of a treatment train (i.e., utilized in front of best management practices such as detention, retention, and infiltration basins, etc., as defined in the NJ Stormwater Best Management Practices Manual). Use of this device in series with other manufactured treatment devices can only be approved by the Land Use Regulation Program and/or the Division of Watershed Management.
2. The Aqua-Swirl™ Concentrator shall be designed in accordance with New Jersey's water quality design storm, as required in the Stormwater Management Rules (N.J.A.C. 7:8).
3. A Quality Assurance Project Plan supporting the Technology Acceptance and Reciprocity Partnership (TARP) Tier II Protocol for Stormwater Best Management Practice Demonstration (July, 2003), and including any additional field testing requirements that the NJDEP shall request, shall be submitted to NJDEP and/or NJCAT within six (6) months from the date of the Conditional Interim Certification letter.
4. Field evaluation data that are consistent with the Tier II Protocol and any additional NJDEP requirements shall be submitted to NJDEP and/or NJCAT by June 30, 2007.
5. The appropriate devices satisfying site selection and sizing criteria must be consistent with the specifications as described in **Table 1**.

Aqua-Swirl™ Model	Swirl Chamber Diameter (ft)	Maximum Stub-Out Pipe Outer Diameter (in)		Water Quality Treatment Flow (cfs)	Oil/Debris Storage Capacity (gal)	Sediment Storage Capacity (ft³)
		On/Offline	CFD ¹			
AS-2	2.50	8	12	0.55	37	10
AS-3	3.25	10	16	0.9	110	20
AS-4	4.25	12	18	1.6	190	32
AS-5	5.00	12	24	2.2	270	45
AS-6	6.00	14	30	3.15	390	65
AS-7	7.00	16	36	4.3	540	90
AS-8	8.00	18	42	5.6	710	115
AS-9	9.00	20	48	7.1	910	145
AS-10	10.0	22	54	8.75	1130	180
AS-12	12.0	24	60	12.6	1698	270

Table 1. Aqua-Swirl™ Concentrator Models at 50% of Original Treatment Flow

(1) The Aqua-Swirl™ Conveyance Flow Diversion (CFD) provides full treatment of the "first flush," while the peak design storm is diverted and channeled through the main conveyance pipe.