


New Jersey Department of Transportation
CONSTRUCTION ADVISORY

NUMBER: 3	INERTIAL BARRIER SAND MOISTURE CONTENT	5/17/2011
CATEGORY: Safety		

Construction Procedure Handbook Section VI Subsection F-3 QUALITY CONTROL AND QUALITY ASSURANCE MOISTURE CONTENT ON SAND IN INERTIAL BARRIER MODULES has been rescinded.

It is the Contractor's responsibility to ensure that the moisture of the sand in the modules is no more than 3 percent. If the RE suspects that the moisture content is above 3 percent, he may request that the Contractor perform a moisture content test on the sand according to AASHTO T 255 and provide the RE certified test results. A change to the 2007 Standard Specification has been made to account for this.

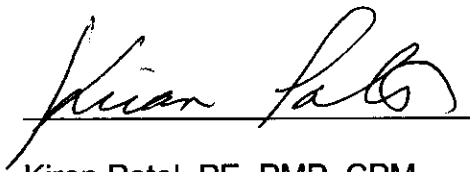

Kiran Patel, PE, PMP, CPM
Director, Construction Services & Materials