SCOPE OF WORK

Rubber Flooring Removal & Replacement

Norman A. Bleshman Regional Day School Paramus, Bergen County, N.J.


Project No. E0385-00

STATE OF NEW JERSEY

Honorable Philip D. Murphy, Governor Honorable Sheila Y. Oliver, Lt. Governor

DEPARTMENT OF THE TREASURY

Elizabeth Maher Muoio, Treasurer



DIVISION OF PROPERTY MANAGEMENT AND CONSTRUCTION

Christopher Chianese, Director

Date: December 11, 2019

PROJECT NO: E0385-00 DATE: December 11, 2019

TABLE OF CONTENTS

SEC	ECTION	
I.	OBJECTIVE	6
II.	CONSULTANT QUALIFICATIONS	6
A.	CONSULTANT & SUB-CONSULTANT PRE-QUALIFICATIONS	
III.	PROJECT BUDGET	6
A. B. C.	CONSTRUCTION COST ESTIMATE (CCE)	6 6
IV.	PROJECT SCHEDULE	7
A. B. C. D. E.	SCOPE OF WORK DESIGN & CONSTRUCTION SCHEDULE CONSULTANT'S PROPOSED DESIGN & CONSTRUCTION SCHEDULE BID DOCUMENT CONSTRUCTION SCHEDULE CONTRACTOR CONSTRUCTION PROGRESS SCHEDULE	
V.	PROJECT SITE LOCATION & TEAM MEMBERS	9
	PROJECT SITE ADDRESS PROJECT TEAM MEMBER DIRECTORY DPMC Representative: Department of Education:	9 10
VI.	PROJECT DEFINITION	10
A. B.	BACKGROUNDFUNCTIONAL DESCRIPTION OF THE BUILDING	
VII.	CONSULTANT DESIGN RESPONSIBILITIES	11
2	DESIGN REQUIREMENTS 1. Flooring: 2. Environmental: 3. Contractor Use of the Premises: 4. CENERAL DESIGN OVERVIEW	11 11
2	GENERAL DESIGN OVERVIEW 1. Design Detail:	

DATE: December 11, 2019

C. PROJECT COMMENCEMENT	13
1. Project Directory:	13
2. Site Access:	13
3. Project Coordination:	14
4. Existing Documentation:	14
5. Scope of Work:	14
6. Project Schedule:	
D. BUILDING & SITE INFORMATION	15
1. Building Classification:	15
2. Building Block & Lot Number:	15
3. Building Site Plan:	15
4. Site Location Map:	15
E. DESIGN MEETINGS & PRESENTATIONS	
1. Design Meetings:	15
2. Design Presentations:	
F. CONSTRUCTION BID DOCUMENT SUBMITTAL	16
	
VIII. CONSULTANT CONSTRUCTION RESPONSIBILIT	LES 16
A. GENERAL CONSTRUCTION ADMINISTRATION OVERVIEW	16
B. PRE-BID MEETING	
C. POST BID REVIEW MEETING, RECOMMENDATION FOR AWARD	
1. Post Bid Review:	
2. Review Meeting:	
3. Substitutions:	
4. Schedule:	
5. Performance:	
6. Letter of Recommendation:	
7. Conformed Drawings:	
D. DIRECTOR'S HEARING	
E. CONSTRUCTION JOB MEETINGS, SCHEDULES, LOGS	
1. Meetings:	
2. Schedules:	
3. Submittal Log:	
F. CONSTRUCTION SITE ADMINISTRATION SERVICES	
G. SUB-CONSULTANT PARTICIPATION	
H. DRAWINGS	
1. Shop Drawings:	
2. As-Built & Record Set Drawings:	
I. CONSTRUCTION DEFICIENCY LIST	
J. INSPECTIONS: SUBSTANTIAL & FINAL COMPLETION	
K. CLOSE-OUT DOCUMENTS	
L. CLOSE-OUT ACTIVITY TIME	
M. TESTING, TRAINING, MANUALS AND ATTIC STOCK	

DATE: December 11, 2019

1	Testing:	24
2	2. Training:	
	3. Operation & Maintenance Manuals:	
4		
N.		
	Consultant:	
2		
	3. Recommendation for Approval:	
4		
5		
6		
7		
8	\mathcal{E}	
9	O. Consultant Fee:	27
IX.	PERMITS & APPROVALS	28
A.	NJ UNIFORM CONSTRUCTION CODE PERMIT	28
	Prior Approval Certification Letters:	
2		
	3. Special Inspections:	
В.	OTHER REGULATORY AGENCY PERMITS, CERTIFICATES AND APPROVALS	
C.	STATE INSURANCE APPROVAL	
D.	PUBLIC EMPLOYEES OCCUPATIONAL SAFETY & HEALTH PROGRAM	
E.	PERMIT MEETINGS	
F.	MANDATORY NOTIFICATIONS	31
G.	CONSULTANT FEE	
X.	GENERAL REQUIREMENTS	31
	_	
A.	SCOPE CHANGESERRORS AND OMISSIONS	
В.	ENERGY INCENTIVE PROGRAM	
C.		
XI.	ALLOWANCES	32
A.	PERMIT FEE ALLOWANCE	32
1	Permits:	32
2	Permit Costs:	32
3	3. Applications:	32
4	l. Consultant Fee:	32
XII.	SUBMITTAL REQUIREMENTS	33
A.	CONTRACT DELIVERABLES	
	CATALOG CUTS	

DATE: December 11, 2019

С.	PROJ	ECT DOCUMENT BOOKLET	
D.		GN DOCUMENT CHANGES	
E.		LE-PRIME CONTRACT	
XIII	. so	W SIGNATURE APPROVAL SHEET	35
XIV	36		
XV.	. EXHIBITS		40
	A.	SAMPLE PROJECT SCHEDULE FORMAT	
	В.	PROJECT SITE LOCATION MAP	
	C.	FLOOR PLAN W/AREA AFFECTED BY WORK	
	D.	PHOTOS	
	E.	REPORTS	

PROJECT NO: E0385-00 DATE: December 11, 2019

I. OBJECTIVE

The objective of this project is to remove and replace approximately 6,000 square feet of rubber flooring in the gym and adjoining hallway due to the presence of mercury. See **Exhibit 'C'** for area affected by work.

II. CONSULTANT QUALIFICATIONS

A. CONSULTANT & SUB-CONSULTANT PRE-QUALIFICATIONS

The Consultant shall be a firm pre-qualified with the Division of Property Management & Construction (DPMC) in the following discipline(s):

• P001 Architecture

The Consultant shall also have in-house capabilities or Sub-Consultants pre-qualified with DPMC in:

• P011 Environmental Engineering

As well as, <u>any and all</u> other Architectural, Engineering and Specialty Disciplines necessary to complete the project as described in this Scope of Work (SOW).

III. PROJECT BUDGET

A. CONSTRUCTION COST ESTIMATE (CCE)

The initial Construction Cost Estimate (CCE) for this project is \$486,000.

The Consultant shall review this Scope of Work and provide a narrative evaluation and analysis of the accuracy of the proposed project CCE in their technical proposal based on their professional experience and opinion.

B. CURRENT WORKING ESTIMATE (CWE)

The Current Working Estimate (CWE) for this project is \$712,770.

The CWE includes the construction cost estimate and all consulting, permitting and administrative fees.

PROJECT NO: E0385-00 DATE: December 11, 2019

The CWE is the Client Agency's financial budget based on this project Scope of Work and shall not be exceeded during the design and construction phases of the project unless DPMC approves the change in Scope of Work through a Contract amendment.

C. CONSULTANT'S FEES

The construction cost estimate for this project *shall not* be used as a basis for the Consultant's design and construction administration fees. The Consultant's fees shall be based on the information contained in this Scope of Work document and the observations made and/or the additional information received during the pre-proposal meeting.

IV. PROJECT SCHEDULE

A. SCOPE OF WORK DESIGN & CONSTRUCTION SCHEDULE

The following schedule identifies the estimated design and construction phases for this project and the estimated durations.

PROJECT PHASE **ESTIMATED DURATION (Calendar Days)** 1. Site Access Approvals & Schedule Design Kick-off Meeting 7 2. Field Investigations 14 3. Final Design Phase 100% 35 14 • Project Team & DPMC Plan/Code Unit Review & Approval 4. Final Design Re-Submission to Address Comments 14 • Project Team & DPMC Plan/Code Unit Review & Approval 5. Permit Application Phase 7 Issue Plan Release 6. Bid Phase 42 7. Award Phase 28 8. Construction Phase **60**

PROJECT NO: E0385-00 DATE: December 11, 2019

B. CONSULTANT'S PROPOSED DESIGN & CONSTRUCTION SCHEDULE

The Consultant shall submit a project design and construction bar chart schedule with their technical proposal that is similar in format and detail to the schedule depicted in **Exhibit 'A'**. The bar chart schedule developed by the Consultant shall reflect their recommended project phases, phase activities, activity durations.

The Consultant shall estimate the duration of the project Close-Out Phase based on the anticipated time required to complete each deliverable identified in Section XIV of this document entitled "Contract Deliverables - Project Close-Out Phase" and include this information in the bar chart schedule submitted.

A written narrative shall also be included with the technical proposal explaining the schedule submitted and the reasons why and how it can be completed in the time frame proposed by the Consultant.

This schedule and narrative will be reviewed by the Consultant Selection Committee as part of the evaluation process and will be assigned a score commensurate with clarity and comprehensiveness of the submission.

C. CONSULTANT DESIGN SCHEDULE

Based on the Notice to Proceed, Consultant shall update their approved schedule and shall distribute it at the design kickoff meeting. Note that this schedule shall be submitted in both paper format and on compact disk in a format compatible with *Microsoft Project*. This schedule will be binding for the Consultant's activities and will include the start and completion dates for each design activity. The Consultant and Project Team members shall use this schedule to ensure that all design milestone dates are being met for the project. The Consultant shall update the schedule to reflect performance periodically (minimally at each design phase) for the Project Team review and approval. Any recommendations for deviations from the approved design schedule must be explained in detail as to the causes for the deviation(s) and impact to the schedule.

D. BID DOCUMENT CONSTRUCTION SCHEDULE

The Consultant shall include a construction schedule in Division 1 of the specification bid document. This schedule shall contain, at minimum, the major activities and their durations for each trade specified for the project. This schedule shall be in "bar chart" format and will be used by the Contractors as an aid in determining their bid price. It shall reflect special sequencing or phased construction requirements including, but not limited to: special hours for building access, weather restrictions, imposed constraints caused by Client Agency program schedules, security

PROJECT NO: E0385-00 DATE: December 11, 2019

needs, lead times for materials and equipment, anticipated delivery dates for critical items, utility interruption and shut-down constraints, and concurrent construction activities of other projects at the site and any other item identified by the Consultant during the design phases of the project.

E. CONTRACTOR CONSTRUCTION PROGRESS SCHEDULE

The Contractor shall be responsible for preparing a coordinated combined progress schedule with the Sub-Contractors after the award of the contract. This schedule shall meet all of the requirements identified in the Consultant's construction schedule. The construction schedule shall be completed in accordance with the latest edition of the Instructions to Bidders and General Conditions and Bulletins that may be issued on the project.

The Consultant must review and analyze this progress schedule and recommend approval/disapproval to the Project Team until a satisfactory version is approved by the Project Team. The Project Team must approve the baseline schedule prior to the start of construction and prior to the Contractor submitting invoices for payment.

The Consultant shall note in Division 1 of the specification that the State will not accept the progress schedule until it meets the project contract requirements and any delays to the start of the construction work will be against the Contractor until the date of acceptance by the State.

The construction progress schedule shall be reviewed, approved, and updated by the Contractor, Consultant, and Project Team members at each regularly scheduled construction job meeting and the Consultant shall note the date and trade(s) responsible for project delays (as applicable).

V. PROJECT SITE LOCATION & TEAM MEMBERS

A. PROJECT SITE ADDRESS

The location of the project site is:

Norman A. Bleshman Regional Day School 333 East Ridgewood Avenue Paramus, New Jersey 07652

See Exhibit 'B' for the project site location map.

B. PROJECT TEAM MEMBER DIRECTORY

The following are the names, addresses, and phone numbers of the Project Team members.

PROJECT NO: E0385-00 DATE: December 11, 2019

1. **DPMC Representative:**

Name: <u>Babatunde Ogunnubi, Design Project Manager</u>

Address: <u>Division Property Management & Construction</u>

20 West State Street, 3rd Floor

Trenton, NJ 08608-1206

Phone No: (609) 633-7061

E-Mail No: <u>babatunde.ogunnubi@treas.nj.gov</u>

2. Department of Education:

Name: <u>Joseph Vitelli, Project Manager</u>

Address: Department of Education

100 Riverview Plaza, PO Box 500

Trenton, NJ 08625

Phone No: (609) 292-3866

E-Mail No: <u>Joseph.Vitelli@doe.nj.gov</u>

VI. PROJECT DEFINITION

A. BACKGROUND

The Norman A. Bleshman Regional Day School is a one story educational facility for mentally challenged children. The building contains approximately 42,160 square feet of floor area containing classrooms, a cafeteria and gymnasium. See **Exhibit 'C'** for a floor plan. There is a stand-alone HVAC Unit servicing the gymnasium and adjoining hallway. Two sets of double doors in the gymnasium provide exterior access. See photos shown in **Exhibit 'D'**.

The construction work for this project shall take place in the months of July and August when school is not in session. The summer program in these months will be relocated to another site.

B. FUNCTIONAL DESCRIPTION OF THE BUILDING

The Bleshman School was constructed in 1980 and occupied in 1981. It is a one-story, steel frame and masonry building on an eight inch concrete slab. The gymnasium floor and an adjoining hallway have a rubber flooring system that contains mercury.

In May 1995, the Bergen County Technical School District procured the services of LAN Associates to collect air samples and screen the air in the gymnasium and surrounding rooms for the presence of mercury vapor and other air quality parameters. Mercury concentrations measured in the gym and hallway leading to the gym exceeded thresholds specified by the New

PROJECT NO: E0385-00 DATE: December 11, 2019

Jersey Department of Health. As a result, this project will remove and properly dispose of the rubberized flooring in the gym and hallway and replace it with new flooring system. The Facility staff desires a maintenance free flooring system, that is preferably monolithic, neutral in color and durable to bear the heavy use of wheelchairs, bikes, and physical therapy equipment. The gym is currently closed to students.

The report by LAN Associates, dated June 25, 2019 is shown in Exhibit 'E'.

VII. CONSULTANT DESIGN RESPONSIBILITIES

A. DESIGN REQUIREMENTS

1. Flooring:

The Consultant shall review the Indoor Air Quality Report by LAN Associates, see **Exhibit 'E'**, and provide construction documents to safely remove and replace the rubber flooring system in the gymnasium and adjoining hallway at the Bleshman Regional Day School. The new flooring system shall be environmentally safe and approved by the DPMC project team and facility staff prior to installation. The design of the new flooring shall include and restore the existing markings in the Gymnasium.

2. Environmental:

The Consultant shall provide a monitoring plan that addresses air monitoring during and after construction to ensure air quality is safe for reuse of the gymnasium, hallway and school. The plan should address existing air handling systems to prevent cross contamination.

3. Contractor Use of the Premises:

The Consultant shall develop a "Contractor's Use of the Premises" with the DPMC Project Team members that will identify the rules and regulations that must be observed by the Contractors during the construction of the project. Construction shall take place in the summer of 2020 when school is not in session to minimize student impact.

B. GENERAL DESIGN OVERVIEW

1. Design Detail:

Section VII of this Scope of Work is intended as a guide for the Consultant to understand the overall basic design requirements of the project and is not intended to identify each specific design component related to code and construction items. The Consultant shall provide those details during the design phase of the project ensuring that they are in compliance with all applicable

PROJECT NO: E0385-00 DATE: December 11, 2019

codes, regulating authorities, and the guidelines established in the DPMC Procedures for Architects and Engineers Manual.

The Consultant shall understand that construction documents submitted to DPMC shall go beyond the basic requirements set forth by the Uniform Construction Code N.J.A.C. 5:23-2.15(f). Drawings and specifications shall provide detail beyond that required to merely show the nature and character of the work to be performed. The construction documents shall provide sufficient information and detail to illustrate, describe and clearly delineate the design intent of the Consultant and enable all Contractors to uniformly bid the project.

The Consultant shall review and comply with the DPMC "Plan Review Instructions" which can be found on DPMC's web site at:

http://www.state.nj.us/treasury/dpmc/lists_and_publications.shtml

The Consultant shall ensure that all of the design items described in this scope of work are addressed and included in the project drawings and specification sections where appropriate.

It shall be the Consultant's responsibility to provide all of the design elements for this project. Under no circumstance may they delegate the responsibility of the design; or portions thereof, to the Contractor unless specifically allowed in this Scope of Work.

2. Specification Format:

The Consultant shall prepare the construction specifications in the Construction Specifications Institute (CSI) format entitled MasterFormat©, latest edition.

The project construction specifications shall include only those CSI MasterFormat© specification sections and divisions applicable to this specific project.

3. Submittal Schedule:

The Consultant shall include a submittal schedule in Division 1 of the specifications. The schedule (list of required submittals) shall identify the general conditions and/or specification section (number and name) and the type of submittal required (material data, product data, test results, calculations, etc.). The submittal schedule is a compilation of the submittals required on the project and is provided as an aid to the contractor.

4. Construction Cost Estimates:

The Consultant shall include with each design submittal phase identified in Paragraph IV.A, including the Permit Application Phase and Bid Phase, a detailed construction cost estimate

PROJECT NO: E0385-00 DATE: December 11, 2019

itemized and summarized by the divisions and sections of the Construction Specification Institute (CSI) MasterFormat© latest edition applicable to the project.

The detailed breakdown of each work item shall include labor, equipment, material and total costs.

The construction estimate shall include all alternate bid items and all unit price items itemized and summarized by the divisions and sections of the specifications.

All cost estimates shall be adjusted for regional location, site factors, construction phasing, premium time, building use group, location of work within the building, temporary swing space, security issues, and inflation factors based on the year in which the work is to be performed.

The cost estimate shall include descriptions of all allowances and contingencies noted in the estimate.

All cost estimates must be submitted on a DPMC-38 Project Cost Analysis form at each design phase of the project supported by the detailed construction cost estimate. The Project Manager will provide cost figures for those items which may be in addition to the CCE such as art inclusion, CM services, etc. and must be included as part of the CWE. This cost analysis must be submitted for all projects regardless of the Construction Cost Estimate amount.

C. PROJECT COMMENCEMENT

A pre-design meeting shall be scheduled with the Consultant and the Project Team members at the commencement of the project to obtain and/or coordinate the following information:

1. Project Directory:

Develop a project directory that identifies the name and phone number of key designated representatives who may be contacted during the design and construction phases of this project.

2. Site Access:

Develop procedures to access the project site and provide the names and phone numbers of approved escorts when needed. Obtain copies of special security and policy procedures that must be followed during all work conducted at the facility and include this information in Division 1 of the specification.

PROJECT NO: E0385-00 DATE: December 11, 2019

3. Project Coordination:

Review and become familiar with any current and/or future projects at the site that may impact the design, construction, and scheduling requirements of this project. Incorporate all appropriate information and coordination requirements in Division 1 of the specification.

4. Existing Documentation:

Copies of the following documents will be provided to each Consulting firm at the pre-proposal meeting to assist in the bidding process.

 DBC Project No. E031-2: Bergen County Regional Day School for the Multiply Handicapped, June 29,1979, Rothe-Johnson Architects Planners

Review these documents and any additional information that may be provided at a later date such as reports, studies, surveys, equipment manuals, as-built drawings, etc. The State does not attest to the accuracy of the information provided and accepts no responsibility for the consequences of errors by the use of any information and material contained in the documentation provided. It shall be the responsibility of the Consultant to verify the contents and assume full responsibility for any determination or conclusion drawn from the material used. If the information provided is insufficient, the Consultant shall take the appropriate actions necessary to obtain the additional information required.

All original documentation shall be returned to the provider at the completion of the project.

5. Scope of Work:

Review the design and construction administration responsibilities and the submission requirements identified in this Scope of Work with the Project Team members. Items such as: contract deliverables, special sequencing or phased construction requirements, special hours for construction based on Client Agency programs or building occupancy, security needs, delivery dates of critical and long lead items, utility interruptions or shut down constraints for tie-ins, weather restrictions, and coordination with other project construction activities at the site shall be addressed.

This information and all general administrative information; including a narrative summary of the work for this project, *shall be included in Division 1* of the specification. The Consultant shall assure that there are no conflicts between the information contained in Division 1 of the specification and the DPMC General Conditions.

6. Project Schedule:

Review and update the project design and construction schedule with the Project Team members.

PROJECT NO: E0385-00 DATE: December 11, 2019

D. BUILDING & SITE INFORMATION

The following information shall be included in the project design documents.

1. Building Classification:

Provide the building Use Group Classification and Construction Type on the appropriate design drawing.

2. Building Block & Lot Number:

Provide the site Block and Lot Number on the appropriate design drawing.

3. Building Site Plan:

Only when the project scope involves site work, or when the design triggers code issues that require site information to show code compliance, shall a site plan be provided that is drawn in accordance with an accurate boundary line survey. The site plan shall include, but not be limited to, the following as may be applicable:

- The size and location of new and existing buildings and additions as well as other structures.
- The distance between buildings and structures and to lot lines.
- Established and new site grades and contours as well as building finished floor elevations.
- New and existing site utilities, site vehicular and pedestrian roads, walkways and parking areas.

4. Site Location Map:

Provide a site location map on the drawing cover sheet that identifies the vehicular travel routes from major roadways to the project construction site and the approved access roads to the Contractor's worksite staging area.

E. DESIGN MEETINGS & PRESENTATIONS

1. Design Meetings:

Conduct the appropriate number of review meetings with the Project Team members during each design phase of the project so they may determine if the project meets their requirements, question any aspect of the contract deliverables, and make changes where appropriate. The Consultant shall describe the philosophy and process used in the development of the design criteria and the various alternatives considered to meet the project objectives. Selected studies,

PROJECT NO: E0385-00 DATE: December 11, 2019

sketches, cost estimates, schedules, and other relevant information shall be presented to support the design solutions proposed. Special considerations shall also be addressed such as: Contractor site access limitations, utility shutdowns and switchover coordination, phased construction and schedule requirements, security restrictions, available swing space, material and equipment delivery dates, etc.

It shall also be the responsibility of the Consultant to arrange and require all critical Sub-Consultants to be in attendance at the design review meetings.

Record the minutes of each design meeting and distribute within seven (7) calendar days to all attendees and those persons specified to be on the distribution list by the Project Manager.

2. Design Presentations:

The minimum number of design presentations required for each phase of this project is identified below for reference:

Final Design Phase:

Conduct One (1) working meeting halfway through phase with design construction team.

Conduct One (1) oral presentation with design construction team at phase completion.

F. CONSTRUCTION BID DOCUMENT SUBMITTAL

In addition to submitting construction bid documents as defined in Section XIV Contract Deliverables, Consultant shall submit both specifications and drawings on compact disk (CD) in *Adobe Portable Document Format* (.pdf).

VIII. CONSULTANT CONSTRUCTION RESPONSIBILITIES

A. GENERAL CONSTRUCTION ADMINISTRATION OVERVIEW

This section of the Scope of Work is intended as a guide for the Consultant to understand their overall basic construction administration responsibilities for the project and does not attempt to identify each specific activity or deliverable required during this phase. The Consultant shall obtain that information from the current publication of the DPMC Procedures for Architects and Engineers Manual and any additional information provided during the Consultant Selection Process.

PROJECT NO: E0385-00 DATE: December 11, 2019

B. PRE-BID MEETING

The Consultant shall attend, chair, record and distribute minutes of the Contractor pre-bid meetings. When bidders ask questions that may affect the bid price of the project, the Consultant shall develop a Bulletin(s) to clarify the bid documents in the format described in the Procedures for Architects and Engineers Manual, Section 9.2 entitled "Bulletins." These Bulletins must be sent to DPMC at least seven (7) calendar days prior to the bid opening date. DPMC will then distribute the document to all bidders.

C. POST BID REVIEW MEETING, RECOMMENDATION FOR AWARD

The Consultant; in conjunction with the Project Manager, shall review the bid proposals submitted by the various Contractors to determine the low responsible bid for the project. The Consultant; in conjunction with the Project Manager and Project Team members, shall develop a post bid questionnaire based on the requirements below and schedule a post bid review meeting with the Contractor's representative to review the construction costs and schedule, staffing, and other pertinent information to ensure they understand the Scope of the Work and that their bid proposal is complete and inclusive of all requirements necessary to deliver the project in strict accordance with the plans and specifications.

1. Post Bid Review:

Review the project bid proposals including the alternates, unit prices, and allowances within seven (7) calendar days from the bid due date. Provide a bid tabulation matrix comparing all bids submitted and make a statement about the high, low, and average bids received. Include a comparison of the submitted bids to the approved current construction cost estimate. When applicable, provide an analysis with supporting data, detailing why the bids did not meet the construction cost estimate.

2. Review Meeting:

Arrange a meeting with the apparent low bid Contractor to discuss their bid proposal and other issues regarding the award of the contract. Remind the Contractor that this is a Lump Sum bid. Request the Contractor to confirm that their bid proposal does not contain errors. Review and confirm Alternate pricing and Unit pricing and document acceptance or rejection as appropriate.

Comment on all omissions, qualifications and unsolicited statements appearing in the proposals. Review any special circumstances of the project. Ensure the Contractor's signature appears on all post bid review documents.

3. Substitutions:

PROJECT NO: E0385-00 DATE: December 11, 2019

Inquire about any potential substitutions being contemplated by the Contractor and advise them of the State's guidelines for the approval of substitutions and the documentation required. Review the deadline and advise the Contractor that partial submissions are not acceptable. Submission after the deadline may be rejected by the State.

Equal substitutions that are proposed by the Contractor that are of lesser value must have a credit change order attached with the submittal (See Article 4.7.5 "Substitutions" of the General Conditions). The State has the right to reject the submission if there is no agreement on the proposed credit. Contractor will be responsible to submit a specified item.

4. Schedule:

Confirm that the Contractor is aware of the number of calendar days listed in the contract documents for the project duration and that the Contractor's bid includes compliance with the schedule duration and completion dates. Particular attention shall be given to special working conditions, long lead items and projected delivery dates, etc. Review project milestones (if applicable). This could give an indication of Contractor performance, but not allow a rejection of the bid.

Review the submittal timeframes per the Contract documents. Ask the Contractor to identify what products will take over twenty-eight (28) calendar days to deliver from the point of submittal approval.

If a CPM Schedule is required, review the provisions and have Contractor acknowledge the responsibility. Ask for the name of the CPM Scheduler and the "ballpark" costs.

5. Performance:

Investigate the past performance of Contractor by contacting Architects and owners (generally three of each) that were listed in their DPMC pre-qualification package or other references that may have been provided. Inquire how the Contractor performed with workmanship, schedule, project management, change orders, cooperation, paper work, etc.

6. Letter of Recommendation:

The Consultant shall prepare a Letter of Recommendation for contract award to the Contractor submitting the lowest responsible bid within three (3) calendar days from the post bid review meeting. The document shall contain the project title, DPMC project number, bid due date and expiration date of the proposal. It shall include a detailed narrative describing each post bid meeting agenda item identified above and a recommendation to award the contract to the apparent low bid Contractor based on the information obtained during that meeting. Describe any acceptance or rejection of Alternate pricing and Unit pricing.

PROJECT NO: E0385-00 DATE: December 11, 2019

Comment on any discussion with the Contractor that provides a sense of their understanding of the project and any special difficulties that they see, and how they might approach those problems.

Attach all minutes of the Post bid meeting and any other relevant correspondence with the Letter of Recommendation and submit them to the Project Manager.

7. Conformed Drawings:

The Consultant shall prepare and distribute two (2) sets of drawings stamped "Conformed Drawings" to the Project Manager that reflect all Bulletins and/or required changes, additions, and deletions to the pertinent drawings within fourteen (14) calendar days of the construction contract award date.

Any changes made in Bulletins, meeting minutes, post bid review requirements shall also be reflected in the specification.

D. DIRECTOR'S HEARING

The Consultant must attend any Director's hearing(s) if a Contractor submits a bid protest. The Consultant shall be present to interpret the intent of the design documents and answer any technical questions that may result from the meeting. In cases where the bid protest is upheld, the Consultant shall submit a new "Letter of Recommendation" for contract award. The hours required to attend the potential hearings and to document the findings shall be estimated by the Consultant and the costs will be included in the base bid of their fee proposal.

E. CONSTRUCTION JOB MEETINGS, SCHEDULES, LOGS

The Consultant shall conduct all of the construction job meetings, to be held bi-weekly for the duration of construction, in accordance with the procedures identified in the A/E manual and those listed below.

1. Meetings:

The Consultant and Sub-Consultant(s) shall attend the pre-construction meeting and all construction job meetings during the construction phase of the project. The Consultant shall chair the meeting, transcribe and distribute the job-meeting minutes for every job meeting to all attendees and to those persons specified to be on the distribution list by the Project Manager. The Agenda for the meeting shall include, but not be limited to the items identified in the Procedures for Architects and Engineers Manual, Section 10.3.1, entitled "Agenda."

Also, the Consultant is responsible for the preparation and distribution of minutes within three (3) calendar days of the meeting. The format to be used for the minutes shall comply with those

PROJECT NO: E0385-00 DATE: December 11, 2019

identified in the "Procedures for Architects and Engineers Manual," Section 10.3.4, entitled, "Format of Minutes." All meeting minutes are to have an "action" column indicating the party that is responsible for the action indicated and a deadline to accomplish the assigned task. These tasks must be reviewed at each job progress meeting until it is completed and the completion date of each task shall be noted in the minutes of the meeting following the task completion.

2. Schedules:

The Consultant; with the input from the Client Agency Representative and Project Manager, shall review and recommend approval of the project construction schedule prepared by the Contractor. The schedule shall identify all necessary start and completion dates of construction, construction activities, submittal process activities, material deliveries and other milestones required to give a complete review of the project.

The Consultant shall record any schedule delays, the party responsible for the delay, the schedule activity affected, and the original and new date for reference.

The Consultant shall ensure that the Contractor provides a two (2) week "look ahead" construction schedule based upon the current monthly updated schedule as approved at the biweekly job meetings and that identifies the daily planned activities for that period. This Contractor requirement must also be included in Division 1 of the specification for reference.

3. Submittal Log:

Based on the Submittal Schedule in Division 1 of the specifications, the Consultant shall develop and implement a submittal log that includes all of the required project submittals as identified in the general conditions and technical specifications. The submittal log shall be provided to the contractor at the pre-construction meeting. The dates of submission shall be determined and approved by all affected parties during the pre-construction meeting.

Examples of the submissions to be reviewed and approved by the Consultant and Sub-Consultant (if required) include: project schedule, schedule of values, shop drawings, equipment and material catalog cuts, spec sheets, product data sheets, MSDS material safety data sheets, specification procedures, color charts, material samples, mock-ups, etc. The submittal review process must be conducted at each job progress meeting and shall include the Consultant, Sub-Consultant, Contractor, Project Manager, and designated representatives of the Client Agency.

The Consultant shall provide an updated submittal log at each job meeting that highlights the status of all required submissions.

PROJECT NO: E0385-00 DATE: December 11, 2019

F. CONSTRUCTION SITE ADMINISTRATION SERVICES

The Consultant and Sub-Consultant(s) shall provide construction site administration services during the duration of the project. The Consultant and Sub-Consultant(s) do not necessarily have to be on site concurrently if there are no critical activities taking place that require the Sub-Consultant's participation.

The services required shall include, but not be limited to; field observations sufficient to verify the quality and progress of construction work, conformance and compliance with the contract documents, and to attend/chair meetings as may be required by the Project Manager to resolve special issues.

Consultant and Sub-Consultant(s) shall conduct weekly site inspection/field observation visits. Site inspection/field observation visits may be conducted in conjunction with regularly scheduled bi-weekly construction job meetings, depending on the progress of work, for weeks that construction job meetings are scheduled. The Consultant and their Sub-Consultant(s) shall submit a field observation report for each site inspection to the Project Manager within three (3) calendar days of the site visit. Also, they shall conduct inspections during major construction activities including, but not limited to the following examples: concrete pours, steel and truss installations, code inspections, final testing of systems, achievement of each major milestone required on the construction schedule, and requests from the Project Manager. The assignment of a full time on-site Sub-Consultant does not relieve the Consultant of their site visit obligation.

The Consultant shall refer to Section XIV. Contract Deliverables of this Scope of Work subsection entitled "Construction Phase" to determine the extent of services and deliverables required during this phase of the project.

G. SUB-CONSULTANT PARTICIPATION

It is the responsibility of the Consultant to ensure that they have provided adequate hours and/or time allotted in their technical proposal so that their Sub-Consultants may participate in all appropriate phases and activities of this project or whenever requested by the Project Manager. This includes the pre-proposal site visit and the various design meetings and construction job meetings, site visits, and close-out activities described in this Scope of Work. Field observation reports and/or meeting minutes are required to be submitted to the Project Manager within three (3) calendar days of the site visit or meeting. All costs associated with such services shall be included in the base bid of the Consultant's fee proposal.

PROJECT NO: E0385-00 DATE: December 11, 2019

H. DRAWINGS

1. Shop Drawings:

Each Contractor shall review the specifications and determine the numbers and nature of each shop drawing submittal. Five (5) sets of the documents shall be submitted with reference made to the appropriate section of the specification. The Consultant shall review the Contractor's shop drawing submissions for conformity with the construction documents within seven (7) calendar days of receipt. The Consultant shall return each shop drawing submittal stamped with the appropriate action, i.e. "Approved", "Approved as Noted", "Approved as Noted Resubmit for Records", "Rejected", etc.

2. As-Built & Record Set Drawings:

The Contractor(s) shall keep the contract drawings up-to-date at all times during construction and upon completion of the project, submit their AS-BUILT drawings to the Consultant with the Contractor(s) certification as to the accuracy of the information prior to final payment. All AS-BUILT drawings submitted shall be entitled AS-BUILT above the title block and dated.

The Consultant shall review the Contractor(s)' AS-BUILT drawings at each job progress meeting to ensure that they are up-to-date. Any deficiencies shall be noted in the progress meeting minutes.

The Consultant shall acknowledge acceptance of the AS-BUILT drawings by signing a transmittal indicating they have reviewed them and that they reflect the AS-BUILT conditions as they exist.

Upon receipt of the AS-BUILT drawings from the Contractor(s), the Consultant shall obtain the original reproducible drawings from DPMC and transfer the AS-BUILT conditions to the original full sized signed reproducible drawings to reflect RECORD conditions within fourteen (14) calendar days of receipt of the AS-BUILT information.

The Consultant shall note the following statement on the original RECORD-SET drawings. "The AS-BUILT information added to this drawing(s) has been supplied by the Contractor(s). The Architect/Engineer does not assume the responsibility for its accuracy other than conformity with the design concept and general adequacy of the AS-BUILT information to the best of the Architect's/Engineer's knowledge."

Upon completion, The Consultant shall deliver the RECORD-SET original reproducible drawings to DPMC who will acknowledge their receipt in writing. This hard copy set of drawings and two (2) sets of current release AUTO CAD discs shall be submitted to DPMC. The discs shall contain all AS-BUILT drawings in both ".dwg" (native file format for AUTO CAD) and ".pdf" (*Adobe* portable document format) file formats.

PROJECT NO: E0385-00 DATE: December 11, 2019

I. CONSTRUCTION DEFICIENCY LIST

The Consultant shall prepare, maintain and continuously distribute an on-going deficiency list to the Contractor, Project Manager, and Client Agency Representative during the construction phase of the project. This list shall be separate correspondence from the field observation reports and shall not be considered as a punch list.

J. INSPECTIONS: SUBSTANTIAL & FINAL COMPLETION

The Consultant and their Sub-Consultant(s) accompanied by the Project Manager, Code Inspection Group, Client Agency Representative and Contractor shall conduct site inspections to determine the dates of substantial and final completion. The Project Manager will issue the only recognized official notice of substantial completion. The Consultant shall prepare and distribute the coordinated punch list, written warranties and other related DPMC forms and documents, supplied by the Contractor, to the Project Manager for review and certification of final contract acceptance.

If applicable, the punch list shall include a list of attic stock and spare parts.

K. CLOSE-OUT DOCUMENTS

The Consultant shall review all project close-out documents as submitted by the Contractors to ensure that they comply with the requirements listed in the "Procedure for Architects and Engineers' Manual." The Consultant shall forward the package to the Project Manager within fourteen (14) calendar days from the date the Certificate of Occupancy/Certificate of Approval is issued. The Consultant shall also submit a letter certifying that the project was completed in accordance with the contract documents, etc.

L. CLOSE-OUT ACTIVITY TIME

The Consultant shall provide all activities and deliverables associated with the "Close-Out Phase" of this project as part of their Lump Sum base bid. The Consultant and/or Sub-Consultant(s) may not use this time for additional job meetings or extended administrative services during the Construction Phase of the project.

M. TESTING, TRAINING, MANUALS AND ATTIC STOCK

The Consultant shall ensure that all equipment testing, training sessions and equipment manuals required for this project comply with the requirements identified below.

PROJECT NO: E0385-00 DATE: December 11, 2019

1. Testing:

All equipment and product testing conducted during the course of construction is the responsibility of the Contractor. However, the Consultant shall ensure the testing procedures comply with manufacturers recommendations. The Consultant shall review the final test reports and provide a written recommendation of the acceptance/rejection of the material, products or equipment tested within seven (7) calendar days of receipt of the report.

2. Training:

The Consultant shall include in the specification that the Contractor shall schedule and coordinate all equipment training with the Project Manager and Client Agency representatives. It shall state that the Contractor shall submit the Operation and Maintenance (O&M) manuals, training plan contents, and training durations to the Consultant, Project Manager and Client Agency Representative for review and approval prior to the training session.

The Consultant shall ensure that the training session is video recorded by the Contractor. A copy of the recording shall be transmitted to the Project Manager on compact disk who will forward the material to the Client Agency for future reference.

All costs associated with the training sessions shall be borne by the Contractor installing the equipment. A signed letter shall be prepared stating when the training was completed and must be accompanied with the training session sign-in sheet as part of the project close-out package.

3. Operation & Maintenance Manuals:

The Consultant shall coordinate and review the preparation and issuance of the equipment manuals provided by the Contractor(s) ensuring that they contain the operating procedures, maintenance procedures and frequency, cut sheets, parts lists, warranties, guarantees, and detailed drawings for all equipment installed at the facility.

A troubleshooting guide shall be included that lists problems that may arise, possible causes with solutions, and criteria for deciding when equipment shall be repaired and when it must be replaced.

Include a list of the manufacturer's recommended spare parts for all equipment being supplied for this project.

A list of names, addresses and telephone numbers of the Contractors involved in the installations and firms capable of performing services for each mechanical item shall be included. The content of the manuals shall be reviewed and approved by the Project Manager and Client Agency Representative.

PROJECT NO: E0385-00 DATE: December 11, 2019

The Consultant shall include in the specification that the Contractor must provide a minimum of ten (10) "throwaway" copies of the manual for use at the training seminar and seven (7) hardbound copies as part of the project close-out package.

4. Attic Stock:

The Consultant shall determine and recommend whether "attic stock" should be included for all aspects of the project. If required, the Consultant shall specify attic stock items to be included in the project.

Prior to project close-out, the Consultant must prepare a comprehensive listing of all items for delivery by the Contractor to the Owner and in accordance with the appropriate specification/plan section. Items shall include, but not be limited to: training sessions, O&M manuals, as-built drawings, itemized attic stock requirements, and manufacturer guarantees/warranties.

N. CHANGE ORDERS

The Consultant shall review and process all change orders in accordance with the contract documents and procedures described below.

1. Consultant:

The Consultant shall prepare a detailed request for Change Order including a detailed description of the change(s) along with appropriate drawings, specifications, and related documentation and submit the information to the Contractor for the change order request submission. This will require the use of the current DPMC 9b form.

2. Contractor:

The Contractor shall submit a DPMC 9b Change Order Request form to the Project Manager within seven (7) calendar days after receiving the Change Order from the Consultant. The document shall identify the changed work in a manner that will allow a clear understanding of the necessity for the change. Copies of the original design drawings, sketches, etc. and specification pages shall be highlighted to clarify and show entitlement to the Change Order.

Copies shall be provided of job minutes or correspondence with all relative information highlighted to show the origin of the Change Order. Supplementary drawings from the Consultant shall be included if applicable that indicate the manner to be used to complete the changed work. A detailed breakdown of all costs associated with the change, i.e. material, labor, equipment, overhead, Sub-Contractor work, profit and bond, and certification of increased bond shall be provided.

PROJECT NO: E0385-00 DATE: December 11, 2019

If the Change Order will impact the time of the project, the Contractor shall include a request for an extension of time. This request shall include a copy of the original approved project schedule and a proposed revised schedule that reflects the impact on the project completion date. Documentation to account for the added time requested shall be included to support entitlement of the request such as additional work, weather, other Contractors, etc. This documentation shall contain dates, weather data and all other relative information.

3. Recommendation for Approval:

The Consultant shall evaluate the reason for the change in work and provide a detailed written recommendation for approval or disapproval of the Change Order Request including backup documentation of costs in CSI format and all other considerations to substantiate that decision.

4. Code Review:

The Consultant shall determine if the Change Order request will require Code review and shall submit six (6) sets of signed and sealed modified drawings and specifications to the DPMC Plan & Code Review Unit for approval, if required. The Consultant must also determine and produce a permit amendment request if required.

5. Cost Estimate:

The Consultant shall provide a detailed cost estimate of the proposed Change Order Request, as submitted by the Contractor, in CSI format (latest edition) for all appropriate divisions and subdivisions using a recognized estimating formula. The estimate shall then be compared with that of the Contractor's estimate. If any line item in the Consultant's estimate is lower than the corresponding line item in the Contractor's estimate, the Consultant in conjunction with the Project Manager is to contact the Contractor by telephone and negotiate the cost differences. The Consultant shall document the negotiated agreement on the Change Order Request form. If the Contractor's total dollar value changes based on the negotiations, the Consultant shall identify the changes on the Change Order Request form accordingly.

When recommending approval or disapproval of the change order, the Consultant shall be required to prepare and process a Change Order package that contains at a minimum the following documents:

- DPMC 9b Change Order Request
- DPMC 10 Consultant's Evaluation of Contractor's Change Order Request
- Consultant's Independent Detailed Cost Estimate
- Notes of Negotiations

PROJECT NO: E0385-00 DATE: December 11, 2019

6. Time Extension:

When a Change Order Request is submitted with both cost and time factors, the Consultant's independent cost estimate is to take into consideration time factors associated with the changed work. The Consultant is to compare their time element with that of the Contractor's time request and if there is a significant difference, the Consultant in conjunction with the Project Manager is to contact the Contractor by telephone and negotiate the difference.

When a Change Order Request is submitted for time only, the Consultant is to do an independent evaluation of the time extension request using a recognized scheduling formula.

Requests for extension of contract time must be done in accordance with the General Conditions Article 10.1 "Changes in the Work".

7. Submission:

The Consultant shall complete all of the DPMC Change Order Request forms provided and submit a completed package to the Project Manager with all appropriate backup documentation within seven (7) calendar days from receipt of the Contractor's change order request. The Consultant shall resubmit the package at no cost to the State if the change order package contents are deemed insufficient by the Project Manager.

8. Meetings:

The Consultant shall attend and actively participate at all administrative hearings or settlement conferences as may be called by Project Manager in connection with such Change Orders and provide minutes of those meetings to the Project Manager for distribution.

9. Consultant Fee:

All costs associated with the potential Contractor Change Order Requests shall be anticipated by the Consultant and included in the base bid of their fee proposal.

If the Client Agency Representative requests a scope change; and it is approved by the Project Manager, the Consultant may be entitled to be reimbursed through an amendment and in accordance with the requirements stated in paragraph 10.01 of this Scope of Work.

PROJECT NO: E0385-00 DATE: December 11, 2019

IX. PERMITS & APPROVALS

A. NJ UNIFORM CONSTRUCTION CODE PERMIT

The project construction documents must comply with the latest adopted edition of the NJ Uniform Construction Code (NJUCC).

The latest NJUCC Adopted Codes and Standards can be found at:

http://www.state.nj.us/dca/divisions/codes/codreg/

The Consultant shall complete the NJUCC permit application and all applicable technical subcode sections with all technical site data required. The Agent section of the application and certification section of the building sub-code section shall be signed. These documents shall be forwarded to the DPMC Project Manager.

The Consultant may obtain copies of all NJUCC permit applications at the following website:

http://www.state.nj.us/dca/divisions/codes/forms/

All other required project permits shall be obtained and paid for by the Consultant in accordance with the procedures described in Paragraph IX.B.

1. Prior Approval Certification Letters:

The issuance of a construction permit for this project may be contingent upon acquiring various "prior approvals" as defined by N.J.A.C. 5:23-1.4. It is the Consultant's responsibility to determine which prior approvals, if any, are required. The Consultant shall submit a general certification letter to the DPMC Plan & Code Review Unit Manager during the Permit Phase of this project that certifies all required prior approvals have been obtained.

In addition to the general certification letter discussed above, the following specific prior approval certification letters, where applicable, shall be submitted by the Consultant to the DPMC Plan & Code Review Unit Manager: Soil Erosion & Sediment Control, Water & Sewer Treatment Works Approval, Coastal Areas Facilities Review, Compliance of Underground Storage Tank Systems with N.J.A.C. 7:14B, Pinelands Commission, Highlands Council, Well Construction and Maintenance; Sealing of Abandoned Wells with N.J.A.C. 7:9D, Certification that all utilities have been disconnected from structures to be demolished, Board of Health Approval for Potable Water Wells, Health Department Approval for Septic Systems. It shall be noted that in accordance with N.J.A.C. 5:23-2.15(a)5, a permit cannot be issued until the letter(s) of certification is received.

PROJECT NO: E0385-00 DATE: December 11, 2019

2. Multi-building or Multi-site Permits:

A project that involves many buildings and/or sites requires that a separate permit shall be issued for each building or site. The Consultant must determine the construction cost estimate for *each* building and/or site location and submit that amount where indicated on the permit application.

3. Special Inspections:

In accordance with the requirements of the New Jersey Uniform Construction Code N.J.A.C. 5:23-2.20(b), Bulletin 03-5 and Chapter 17 of the International Building Code, the Consultant shall be responsible for the coordination of all special inspections during the construction phase of the project.

Bulletin 03-5 can be found at:

http://www.state.nj.us/dca/divisions/codes/publications/pdf bulletins/b 03 5.pdf

a. Definition:

Special inspections are defined as an independent verification by a certified Special Inspector for Class I buildings and smoke control systems in any class building. The special inspector is to be independent from the Contractor and responsible to the Consultant so that there is no possible conflict of interest.

Special inspectors shall be certified in accordance with the requirements in the New Jersey Uniform Construction Code.

b. Responsibilities:

The Consultant shall submit with the permit application, a list of special inspections and the agencies or special inspectors that will be responsible to carry out the inspections required for the project. The list shall be a separate document, on letter head, signed and sealed.

B. OTHER REGULATORY AGENCY PERMITS, CERTIFICATES AND APPROVALS

The Consultant shall identify and obtain all other State Regulatory Agency permits, certificates, and approvals that will govern and affect the work described in this Scope of Work. An itemized list of these permits, certificates, and approvals shall be included with the Consultant's Technical Proposal and the total amount of the application fees should be entered in the Fee Proposal line item entitled, "Permit Fee Allowance."

PROJECT NO: E0385-00 DATE: December 11, 2019

The Consultant may refer to the Division of Property Management and Construction "Procedures for Architects and Engineers Manual", Section 6.4.8, which presents a compendium of State permits, certificates, and approvals that may be required for this project.

The Consultant shall determine the appropriate phase of the project to submit the permit application(s) in order to meet the approved project milestone dates.

Where reference to an established industry standard is made, it shall be understood to mean the most recent edition of the standard unless otherwise noted. If an industry standard is found to be revoked, or should the standard have undergone substantial change or revision from the time that the Scope of Work was developed, the Consultant shall comply with the most recent edition of the standard.

C. STATE INSURANCE APPROVAL

The Consultant shall respond in writing to the FM Global Insurance Underwriter plan review comments through the DPMC Plan & Code Review Unit Manager as applicable. The Consultant shall review all the comments and, with agreement of the Project Team, modify the documents while adhering to the project's SOW requirements, State code requirements, schedule, budget, and Consultant fee.

D. PUBLIC EMPLOYEES OCCUPATIONAL SAFETY & HEALTH PROGRAM

A paragraph shall be included in the design documents, if applicable to this project that states: The Contractor shall comply with all the requirements stipulated in the Public Employees Occupational Safety & Health Program (PEOSHA) document, paragraph 12:100-13.5 entitled "Air quality during renovation and remodeling". The Contractor shall submit a plan demonstrating the measures to be utilized to confine the dust, debris, and air contaminants in the renovation or construction area of the project site to the Project Team prior to the start of construction.

The link to the document is:

http://www.nj.gov/health/workplacehealthandsafety/peosh/peosh-health-standards/iaq.shtml

E. PERMIT MEETINGS

The Consultant shall attend and chair all meetings with Permitting Agencies necessary to explain and obtain the required permits.

PROJECT NO: E0385-00 DATE: December 11, 2019

F. MANDATORY NOTIFICATIONS

The Consultant shall include language in Division 1 of the specification that states the Contractor shall assure compliance with the New Jersey "One Call" Program (1-800-272-1000) if any excavation is to occur at the project site.

The One Call Program is known as the "New Jersey Underground Facility Protection Act", refer to N.J.A.C. 14:2.

G. CONSULTANT FEE

The Consultant shall determine the efforts required to complete and submit all permit applications, obtain and prepare supporting documentation, attend meetings, etc., and include the total cost in the base bid of their fee proposal under the "Permit Phase".

X. GENERAL REQUIREMENTS

A. SCOPE CHANGES

The Consultant must request any changes to this Scope of Work in writing. An approved DPMC 9c Consultant Amendment Request form reflecting authorized scope changes must be received by the Consultant prior to undertaking any additional work. The DPMC 9c form must be approved and signed by the Director of DPMC and written authorization issued from the Project Manager prior to any work being performed by the Consultant. Any work performed without the executed DPMC 9c form is done at the Consultant's own financial risk.

B. ERRORS AND OMISSIONS

The errors and omissions curve and the corresponding sections of the "Procedures for Architects and Engineers Manual" are eliminated. All claims for errors and omissions will be pursued by the State on an individual basis. The State will review each error or omission with the Consultant and determine the actual amount of damages, if any, resulting from each negligent act, error or omission.

C. ENERGY INCENTIVE PROGRAM

The Consultant shall review the programs described on the "New Jersey's Clean Energy Program" website at: http://www.njcleanenergy.com to determine if any proposed upgrades to the mechanical and/or electrical equipment and systems for this project qualify for "New Jersey Clean Energy Program" rebates and incentives such as SmartStart, Pay4Performance, Direct Install or any other incentives.

PROJECT NO: E0385-00 DATE: December 11, 2019

The Consultant shall be responsible to complete the appropriate registration forms and applications, provide any applicable worksheets, manufacturer's specification sheets, calculations, attend meetings, and participate in all activities with designated representatives of the programs and utility companies to obtain the entitled financial incentives and rebates for this project. All costs associated with this work shall be estimated by the Consultant and the amount included in the base bid of their fee proposal.

XI. ALLOWANCES

A. PERMIT FEE ALLOWANCE

The Consultant shall obtain and pay for all of the project permits in accordance with the guidelines identified below.

1. Permits:

The Consultant shall determine the various permits, certificates, and approvals required to complete this project.

2. Permit Costs:

The Consultant shall estimate the application fee costs for all of the required project permits, certificates, and approvals (excluding the NJ Uniform Construction Code permit) and include that amount in their fee proposal line item entitled "Permit Fee Allowance", refer to Paragraph IX.A. A breakdown of each permit and application fee shall be attached to the fee proposal for reference.

NOTE: The NJ Uniform Construction Code permit is excluded since it will be paid for by the State.

3. Applications:

The Consultant shall complete and submit all permit applications to the appropriate permitting authorities and the costs shall be paid from the Consultant's permit fee allowance. A copy of the application(s) and the original permit(s) obtained by the Consultant shall be given to the DPMC Project Manager for distribution during construction.

4. Consultant Fee:

PROJECT NO: E0385-00 DATE: December 11, 2019

The Consultant shall determine what is required to complete and submit the permit applications, obtain supporting documentation, attend meetings, etc., and include the total cost in the base bid of their fee proposal under the "Permit Phase" column.

Any funds remaining in the permit allowance will be returned to the State at the close of the project.

XII. SUBMITTAL REQUIREMENTS

A. CONTRACT DELIVERABLES

All submissions shall include the Contract Deliverables identified in Section XIV of this Scope of Work and described in the DPMC Procedures for Architects and Engineers Manual.

B. CATALOG CUTS

The Consultant shall provide catalog cuts as required by the DPMC Plan & Code Review Unit during the design document review submissions. Examples of catalog cuts include, but are not limited to: mechanical equipment, hardware devices, plumbing fixtures, fire suppression and alarm components, specialized building materials, electrical devices, etc.

C. PROJECT DOCUMENT BOOKLET

The Consultant shall submit all of the required Contract Deliverables to the Project Manager at the completion of each phase of the project. All reports, meeting minutes, plan review comments, project schedule, cost estimate in CSI format (latest edition), correspondence, calculations, and other appropriate items identified on the Submission Checklist form provided in the A/E Manual shall be presented in an 8½" x 11" bound "booklet" format.

D. DESIGN DOCUMENT CHANGES

Any corrections, additions, or omissions made to the submitted drawings and specifications at the Permit Phase of the project must be submitted to DPMC Plan & Code Review Unit as a complete document. Corrected pages or drawings may not be submitted separately unless the Consultant inserts the changed page or drawing in the original documents. No Addendums or Bulletins will be accepted as a substitution to the original specification page or drawing.

E. SINGLE-PRIME CONTRACT

All references to "separate contracts" in the Procedures for Architects and Engineers Manual, Chapter 8, shall be deleted since this project will be advertised as a "Single Bid" (Lump Sum All

PROJECT NO: E0385-00 DATE: December 11, 2019

Trades) contract. The single prime Contractor will be responsible for all work identified in the drawings and specifications.

The drawings shall have the required prefix designations and the specification sections shall have the color codes as specified for each trade in the DPMC Procedure for Architects and Engineers Manual.

The Consultant must still develop the Construction Cost Estimate (CCE) for each trade and the amount shall be included on the DPMC-38 Project Cost Analysis form where indicated. This document shall be submitted at each design phase of the project and updated immediately prior to the advertisement to bid.

PROJECT NO: E0385-00 DATE: December 11, 2019

XIII. SOW SIGNATURE APPROVAL SHEET

This Scope of Work shall not be considered a valid document unless all signatures appear in each designated area below.

The Client Agency approval signature on this page indicates that they have reviewed the design criteria and construction schedule described in this project Scope of Work and verifies that the work will not conflict with the existing or future construction activities of other projects at the site.

SOW PREPARED BY	DOAA ABOUELELA, PROJECT MANAGER DPMC PROJECT PLANNING & INITIATION	12/11/2019 DATE
SOW PREPARED BY:	JAMES WRIGHT, MANAGER DPMC PROJECT PLANNING & INITIATION)2/1//2019 DATE
SOW APPROVED BY	JOSEPH VITELLI, MANAGER DEPARTMENT OF EDUCATION	/2/11/2019 DATE
SOW APPROVED BY	BABATUNDE OGUNNUBI, PROJECT MANAG DPMC PROJECT MANAGEMENT GROUP	12 12 19 ER DATE
SOW APPROVED BY:	RICHARD FLODMAND, DEPUTY DIRECTOR DIV PROPERTY MGT & CONSTRUCTION	12/12/19 DATE

PROJECT NO: E0385-00 DATE: December 11, 2019

XIV. CONTRACT DELIVERABLES

The following is a listing of Contract Deliverables that are required at the completion of each phase of this project. The Consultant shall refer to the DPMC publication entitled, "Procedures for Architects and Engineers," Volumes I and II, 2nd Edition, dated January, 1991 to obtain a more detailed description of the deliverables required for each item listed below.

The numbering system used in this "Contract Deliverables" section of the scope of work corresponds to the numbering system used in the "Procedures for Architects and Engineers" manual and some may have been deleted if they do not apply to this project.

FINAL DESIGN PHASE 100% Complete Construction Documents

This Final Design Phase may require more than one submission based on the technical quality and code conformance of the design documents.

- 8.1 Schedule (Update Bar Chart Schedule)
- 8.2 Meeting & Minutes (Minutes within seven (7) calendar days of meeting)
- 8.3 Correspondence
- **8.4** Submission Requirements
 - 8.4.1 A/E Statement of Site Visit
 - 8.4.2 Space Analysis
 - 8.4.3 Special Features Description, special structural features, etc.
 - 8.4.8 Regulatory Agency Approvals (Include itemized list specific to this project)
 - 8.4.10 Drawings: 6 sets
 - 8.4.11 Specifications: 6 sets
 - 8.4.12 Current Working Estimate in CSI Format & Cost Analysis 38 Form
 - 8.4.13 Bar Chart of Design and Construction Schedule
 - 8.4.14 Oral Presentation of this Submission to Project Team
 - 8.4.15 Plan Review/SOW Compliance Statement
 - 8.4.16 This Submission Checklist
 - 8.4.17 Deliverables Submission in Booklet Form: 6 sets
- 8.5 Approvals
 - 8.5.1 Respond to Submission Comments

PERMIT APPLICATION PHASE

PROJECT NAME: Rubber Flooring Removal & Replacement PROJECT LOCATION: Norman A. Bleshman Regional Day School

PROJECT NO: E0385-00 DATE: December 11, 2019

This Permit Application Phase should not include any additional design issues. Design documents shall be 100% complete at the Final Design Phase.

8.6 Permit Application Submission Requirements

- 8.6.1 8.6.7: If all of the deliverables of these sections have been previously submitted to DPMC and approved, there are no further deliverables due at this time
- 8.6.8 Regulatory Agency Approvals(a) UCC Permit Application & Technical Sub-codes completed by A/E
- 8.6.10 Signed and Sealed Drawings: 6 sets
- 8.6.11 Signed and Sealed Specifications: 6 sets
- 8.6.12 Current Working Estimate/Cost Analysis
- 8.6.13 Bar Chart Schedule
- 8.6.14 Project Presentation (N/A this Project)
- 8.6.15 Plan Review/SOW Compliance Statement
- 8/6.16 Submission Checklist

8.7 Approvals

8.8 Submission Forms

Figure 8.4.12	Current Working Estimate/Cost Analysis
Figure 8.4.16	Submission Checklist (Final Review Phase)
Figure 8.6.12-b	Bid Proposal Form (Form DPMC -3)
Figure 8.6.12-c	Notice of Advertising (Form DPMC -31)
Figure 8.6.16	Submission Checklist (Permit Phase)
Figure 8.7	Bid Clearance Form (Form DPMC -601)

BIDDING AND CONTRACT AWARD

9.0 Bidding Phase Requirements

- 9.01 Original Drawings signed & sealed by A/E and drawings on compact disk (CD) in *Adobe Portable Document Format* (.pdf)
- 9.02 One Unbound Specification Color Coded per A/E Manual Section 8.4.11 and specifications on compact disk (CD) in *Adobe Portable Document Format* (.pdf)
- 9.03 Bid Documents Checklist
 - 9.04 Bid Proposal Form
 - 9.05 Notice for Advertising

9.1 Chair Pre-Bid Conference/Mandatory Site Visit

PROJECT NAME: Rubber Flooring Removal & Replacement

PROJECT LOCATION: Norman A. Bleshman Regional Day School

PROJECT NO: E0385-00 DATE: December 11, 2019

7.4 I repare Duneuns	9.2	Prepare E	Bulletins
----------------------	-----	-----------	-----------

- 9.3 **Attend Bid Opening**
- 9.4 **Recommendation for Contract Award**
 - 9.4.1 Prepare Letter(s) of Recommendation for Award & Cost Analysis
- 9.5 **Attend Post Bid Review Meeting(s)**
- 9.6 **Submission Checklist**
- 9.7 **Submission Forms**

Figure 9.4.1 Cost Analysis

Figure 9.6 **Submission Checklist**

CONSTRUCTION PHASE

- 10.1 **Site Construction Administration**
- 10.2 **Pre-Construction Meeting**
- 10.3 **Construction Job Meetings**
 - 10.3.1 Agenda: Schedule and Chair Construction Job Meetings
 - Minutes: Prepare and Distribute Minutes within 5 working days of meeting 10.3.2
 - Schedules; Approve Contractors' Schedule & Update 10.3.3
 - Minutes Format: Prepare Job Meeting Minutes in approved format, figure 10.3.4-a 10.3.4
- 10.4 Correspondence
- 10.5 **Prepare and Deliver Conformed Drawings**
- 10.7 **Approve Contractors Invoicing and Payment Process**
- 10.8 Approve Contractors 12/13 Form for Subs, Samples and Materials
- 10.10 Approve Test Reports
- 10.11 Approve Shop Drawings
- **10.12** Construction Progress Schedule

PROJECT NAME: Rubber Flooring Removal & Replacement

PROJECT LOCATION: Norman A. Bleshman Regional Day School

PROJECT NO: E0385-00 DATE: December 11, 2019

10.12.1 Construction Progress Schedule

10.13 Review & Recommend or Reject Change Orders

- 10.13.1 Scope Changes
- 10.13.2 Construction Change Orders
- 10.13.3 Field Changes

10.14 Construction Photographs

10.15 Submit Field Observation Reports

10.16 Submission Forms

Figure 10.3.4-a	Job Meeting Format of Minutes
Figure 10.3.4-b	Field Report
Figure 10.6	DPMC Insurance Form-24
Figure 10.6-a	Unit Schedule Breakdown
Figure 10.6-b	Monthly Estimate for Payment to Contractor DPMC 11-2
Figure 10.6-c	Monthly Estimate for Payment to Contractor DPMC 11-2A
Figure 10.6-d	Invoice DPMC 11
Figure 10.6-e	Prime Contractor Summary of Stored Materials DPMC 11-3
Figure 10.6-f	Agreement & Bill of Sale certificate for Stored Materials DPMC 3A
Figure 10.7-a	Approval Form for Subs, Samples & Materials DPMC 12
Figure 10.7-b	Request for Change Order DPMC 9b
Figure 10.9	Transmittal Form DPMC 13
Figure 10.10	Submission Checklist

PROJECT CLOSE-OUT PHASE

- 11.1 Responsibilities: Plan, Schedule and Execute Close-Out Activities
- 11.2 Commencement: Initiate Close-Out w/DPMC 20A Project Close-Out Form
- 11.3 Develop Punch List & Inspection Reports
- 11.4 Verify Correction of Punch List Items
- 11.5 Determination of Substantial Completion
- 11.6 Ensure Issuance of "Temporary Certificate of Occupancy or Approval"

PROJECT NAME: Rubber Flooring Removal & Replacement PROJECT LOCATION: Norman A. Bleshman Regional Day School

PROJECT NO: E0385-00 DATE: December 11, 2019

11.7 Initiation of Final Contract Acceptance Process

11.8 Submission of Close-Out Documentation

- 11.8.1 As-Built & Record Set Drawings, 3 sets AUTOCAD Discs Delivered to DPMC
- 11.8.2 (a) Maintenance and Operating manuals, Warranties, etc.: 7 sets each
 - (b) Guarantees
 - (c) Testing and Balancing Reports
 - (d) Shop Drawings
 - (e) Letter of Contract Performance
- 11.8.3 Final Cost Analysis-Insurance Transfer DPMC 25
- 11.8.4 This Submission Checklist

11.9 Final Payment

- 11.9.1 Contractors Final Payment
- 11.9.2 A/E Invoice and Close-Out Forms for Final Payment

11.10 Final Performance Evaluation of the A/E and the Contractors

11.11 Ensure Issuance of a "Certificate of Occupancy or Approval"

11.12 Submission Forms

Figure 11.2	Project Close-Out Documentation List DPMC 20A
Figure 11.3-a	Certificate of Substantial Completion DPMC 20D
Figure 11.3-b	Final Acceptance of Consultant Contract DPMC 20C
Figure 11.5	Request for Contract Transition Close-Out DPMC 20X
Figure 11.7	Final Contract Acceptance Form DPMC 20
Figure 11.8.3-a	Final Cost Analysis
Figure 11.8.3-b	Insurance Transfer Form DPMC 25
Figure 11.8.4	Submission Checklist

XV. EXHIBITS

The attached exhibits in this section will include a sample project schedule, and any supporting documentation to assist the Consultant in the design of the project such as maps, drawings, photographs, floor plans, studies, reports, etc.

END OF SCOPE OF WORK

February 7, 1997

Rev.: January 29, 2002

Responsible Group Code Table


The codes below are used in the schedule field "GRP" that identifies the group responsible for the activity. The table consists of groups in the Division of Property Management & Construction (DPMC), as well as groups outside of the DPMC that have responsibility for specific activities on a project that could delay the project if not completed in the time specified. For reporting purposes, the groups within the DPMC have been defined to the supervisory level of management (i.e., third level of management, the level below the Associate Director) to identify the "functional group" responsible for the activity.

DESCRIPTION	REPORTS TO ASSOCIATE DIRECTOR OF:
Contract Management Group	Contract Management
Client Agency	N/A
Consultant Selection and Prequalification Group	Technical Services
Architect/Engineer	N/A
Plan Review Group	Technical Services
Construction Procurement	Planning & Administration
Construction Contractor	N/A
Financial Management Group	Planning & Administration
Office of Energy and Utility Management	N/A
Project Development Group	Planning & Administration
	Contract Management Group Client Agency Consultant Selection and Prequalification Group Architect/Engineer Plan Review Group Construction Procurement Construction Contractor Financial Management Group Office of Energy and Utility Management

<proj></proj>		
2		
CV3001 Schedule/Conduct Predesign/Project Kick-Off Mtg.		
CV3020 Prepare Program Phase Submittal	Yes 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
CV3021 Distribute Program Submittal for Review		
CV3027 Prepare & Submit Project Cost Analysis (DPMC-38)		
CV3022 Review & Approve Program Submittal	1	
CV3023 Review & Approve Program Submittal	**************************************	
CV3024 Review & Approve Program Submittal		
CV3025 Consolidate & Return Program Submittal Comments		
CV3030 Prepare Schematic Phase Submittal	Y	
CV3031 Distribute Schematic Submittal for Review		
CV3037 Prepare & Submit Project Cost Analysis (DPMC-38)		
Cv3032 Review & Approve Schematic Submittal		
CV3033 Review & Approve Schematic Submittal		
CV3034 Review & Approve Schematic Submittal		
CV3035 Consolidate & Return Schematic Submittal Comment		
CV3040 Prepare Design Development Phase Submittal	**************************************	
CV3041 Distribute D. D. Submittal for Review		
CV3047 Prepare & Submit Project Cost Analysis (DPMC-38)		
CV3042 Review & Approve Design Development Submittal		
CV3043 Review & Approve Design Development Submittal	E	
Cv3044 Review & Approve Design Development Submittal	8	
CV3045 Consolidate & Return D.D. Submittal Comments		
CV3050 Prepare Final Design Phase Submittal	Y 1 1 1 1 1 1 1 1 1 1	
CV3051 Distribute Final Design Submittal for Review		
CV3052 Review & Approve Final Design Submittal	** The state of th	
CV3053 Review & Approve Final Design Submittal	B8	
CV3054 Review Final Design Submitl for Constructability	S30	
NOTE:	DBCA - TEST Sharet of 3	
Refer to section "IV Project Schedule" of the Scope of Work for contract phase durations.	Bureau of Design & Construction Services	
@ Drimavara Systems Inc	Topfort all topfort	A JIUINA

Activity																3
a	Description	Rspn						Weeks								
CV3055	Review & Approve Final Design Submittal	₹					ATTITUTE OF THE SECOND							THE REPORT OF THE PERSON NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TWO IS NAMED IN COLUMN TWO		THE PERSON
CV3056	Consolidate & Return Final Design Comments	CM				*** *** ***	A STATE OF THE STA		AND THE RESERVE OF THE PERSON			1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	200 1000 1000 1000 1000 1000 1000 1000 1000 1000 1000 1000 1000			
CV3060	Prepare & Submit Permit Application Documents	AE							of the second		*** *** **** ****	2				
CV3068	Prepare & Submit Bidding Cost Analysis (DPMC-38)	∑														
Plan R	Plan Review-Permit Acquisition															
CV4001	Review Constr. Documents & Secure UCC Permit	P.R.				441 A44										
CV4010	Provide Funding for Construction Contracts	CA						**************************************							** ** ***	
CV4020	Secure Bid Clearance	™														
Advert	Advertise-Bid-Award											1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1				
CV5001	Advertise Project & Bid Construction Contracts	g.			100 pp					700 170 1001000 1701000 1						
CV5010	Open Construction Bids	Ð														
CV5011	Evaluate Bids & Prep. Recommendation for Award	CM														- 11 - 12 - 13 - 14 - 14 - 14 - 14 - 14 - 14 - 14
CV5012	Evaluate Bids & Prep. Recommendation for Award	AE			et end specialism						** *** *** ***************************			n la		
CV5014	Complete Recommendation for Award	ච							- / / / / /						- pr -	
CV5020	Award Construction Contracts/Issue NTP	ච														
Construction	uction															
CV6000	Project Construction Start/Issue NTP	CK					netro de la porte de la constanta de la consta	**************************************					100 mm. 1			
CV6001	Contract Start/Contract Work (25%) Complete	CON		9 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		The second secon					** *** *** ** *** ** ** *** **				** ** *** *** ** ** ** **	
CV6002	Preconstruction Meeting	CM	The second secon													
CV6003	Begin Preconstruction Submittals	CON							** *** *** *** *** *** *** *** *** ***							
CV6004	Longest Lead Procurement Item Ordered	CON							The second							
CV6005	Lead Time for Longest Lead Procurement Item	CON											1			
CV6006	Prepare & Submit Shop Drawings	CON		4 1 4 1 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4				* *** *** ***								
CV6007	Complete Construction Submittals	CON													********	
CV6011	Roughing Work Start	CON				The same of				der ter e	100 to 10					
CV6012	Perform Roughing Work	CON				The Property of the Control of the C										
CV6010	Contract Work (50%+) Complete	CON							A Company of the Comp					-		
CV6013	Longest Lead Procurement Item Delivered	CON		Annual designation of the second seco												
CV6020	Contract Work (75%) Complete	CON		A to the total and the total a							na en acc					
NO TEL		DBCA TEET	J.S.									3	,,,,			
Refe Scol	Refer to section "IV Project Schedule" of the Scope of Work for contract phase durations.		Bureau of De	gn & Cc	nstructi	on Ser	vices	Sheet 2 of 3	, , , , , , , , , , , , , , , , , , ,		۰۰ کر	ر ه کم	4	«	>	
	© Primavera Systems, Inc.		4	Mounte r roject	103601				7	?			_			
																٦

	Activity											Washe										
Cook Internal Engines Start	CV6014	Roughing Work Complete	Kspn CON	Terretainen (and the same				THE COLUMN	THE PERSON NAMED IN	THE COLUMN				- Amount	unium	THE REAL PROPERTY.	Timinin.	The state of the s			THE PARTY OF
Figure Install Incide Finishes CON	CV6021	Interior Finishes Start	CON	1								**************************************	NA OF THE		The second secon	10 1 11 10 10 10 10 10 10						
Contract Work to Substantial Completion	CV6022	Install Interior Finishes	CON												1							
Substantial Completion Declared	CV6030	Contract Work to Substantial Completion	CON							AN ON AN		1000 AND 1544	200 200 200 200 200 200 200 200 200 200 200	The part of				107 - 1100 - W			The service of the contract of	· · · · · · · · · · · · · · · · · · ·
Comparison Complete Deterned Punch Liar/Seasonal Activities CON	CV6031	Substantial Completion Declared	CM	AND THE AND												2						
Project Construction Complete	CV6075	Complete Deferred Punch List/Seasonal Activities	CON															144 (ba 14	a constant			
Cows Class Out Construction Contracts Cows Construction Contract Cows Construction Contract Cows Project Completion Declared Compact Completion Declared Compact Completion Declared Cows Project Completion Declared Cows Project Completion Declared Cows Project Completion Declared Cows Project Completion Compact Compac	CV6079	Project Construction Complete	CM				25 25 6 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -				1 00 00 00 00 00 00 00 00 00 00 00 00 00		27 10 10 10 10 10 10 10 10 10 10 10 10 10			***********						eri da Brasilia Maria tan bir da Maria dan
Cossin Construction Contracts Complete CM Coss Out AE Contract Coss Out AE Contract Coss Out AE Contract Coss Out AE Contract NOTE: Refer to section "IV Project Schedule" of the Scope of Work for contract phase durations. Bureau of Design & Construction Services Dominion Design AE Construction Services Dominion Design AE Construction Services	CV6080	Close Out Construction Contracts	Ğ		original manufacturing and an artist of the second and artist of the second artist of the second and artist of the second						-			- -				1	1		1	
Cower Close Out AFE Contract CWS7 Project Completion Deduced CM CM CM	CV6089	Construction Contracts Complete	S C						ma tom mo			Commence of the commence of th	AND					are same our	1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -			
NOTE: NO	CV6090	Close Out A/E Contract	™		100 00 000 100 000 000 100 000 000					to the second				* * * *			1					
r to section "IV Project Schedule" of the Bureau of Design & Construction Services of Work for contract phase durations.	CV6092	Project Completion Declared	Š	ent tils ma				* * * * * * * * * * * * * * * * * * *								- 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10			· · · · · · · · · · · · · · · · · · ·			
r to section "IV Project Schedule" of the e of Work for contract phase durations. Bureau of Design & Construction Services Douting Design A										,												
Bureau of Design & Construction Services	NOTE		DBCA - TE	T							s	heet 3 of	L									T
1	Ref Sco	fer to section "IV Project Schedule" of the pe of Work for contract phase durations. © Primavera Systems, Inc.		Bure	an of	Design Rou	& Co tine P	nstruc	ction (Servi				王	EX		bi	+	*	₫	• • • • • • • • • • • • • • • • • • •	

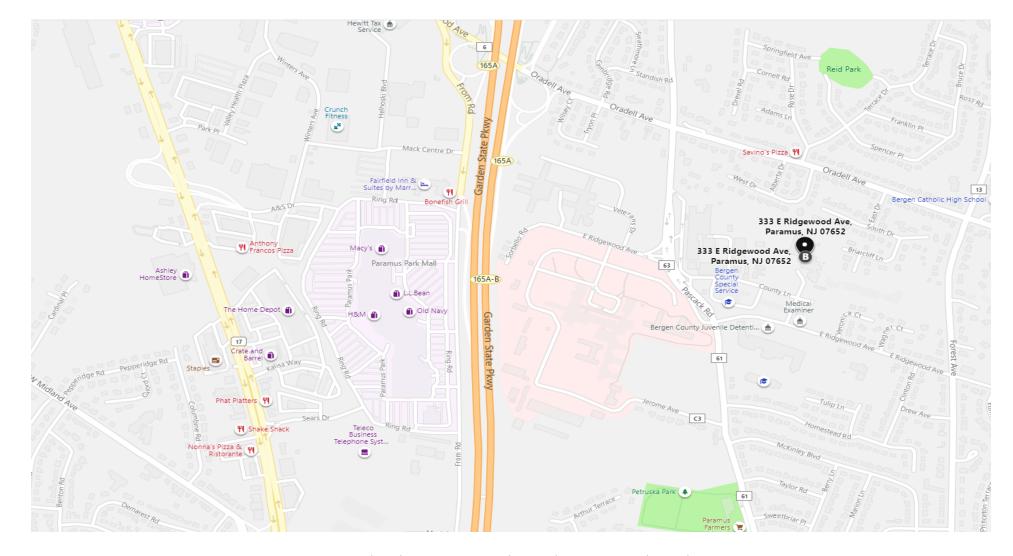

Bleshman Regional Day School
333 East Ridge Road Paramus, NJ 07652
Site Location Map

EXHIBIT 'B'

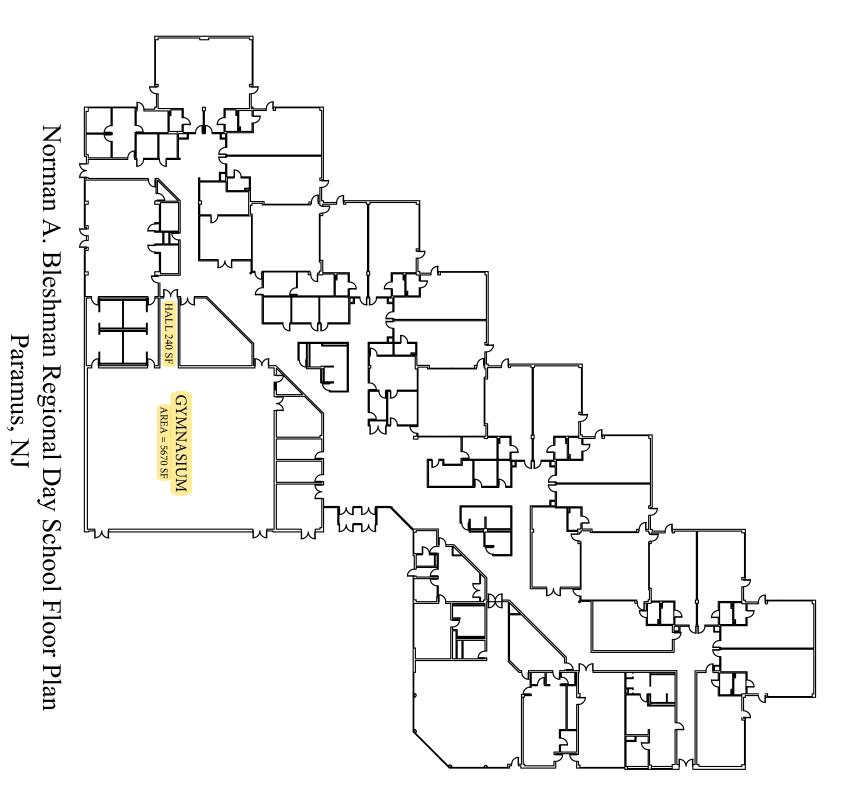


EXHIBIT 'C'




Gymnasium Rubber Floor to be replaced




Gymnasium Rubber Floor to be replaced



Gymnasium Entry To Connecting Hallway

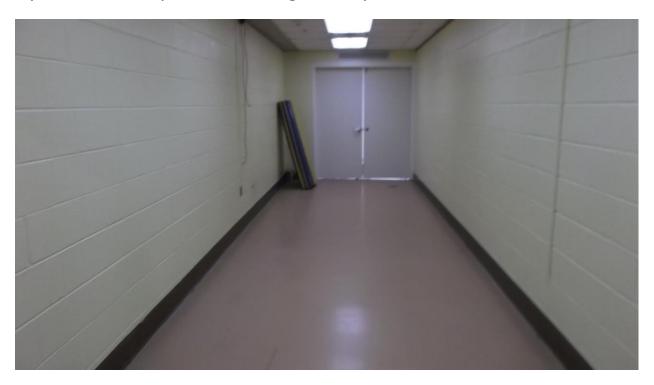


Connecting Hallway between Gymnasium and Main School Corridor Rubber Flooring in this Hallway to be replaced.

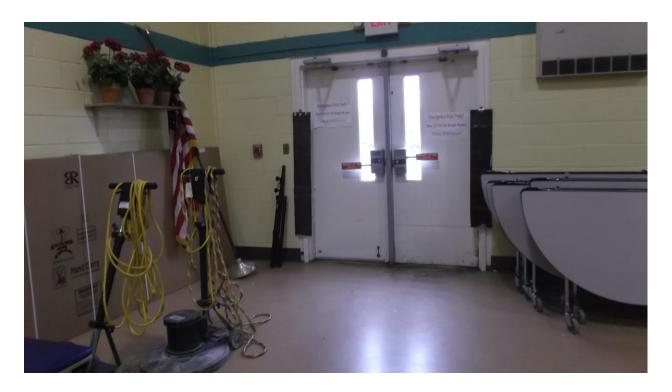

Gymnasium Rubber Floor along Exterior Double Doors to be replaced.



Gymnasium Flooring along the Entry to tiled Adjacent Spaces

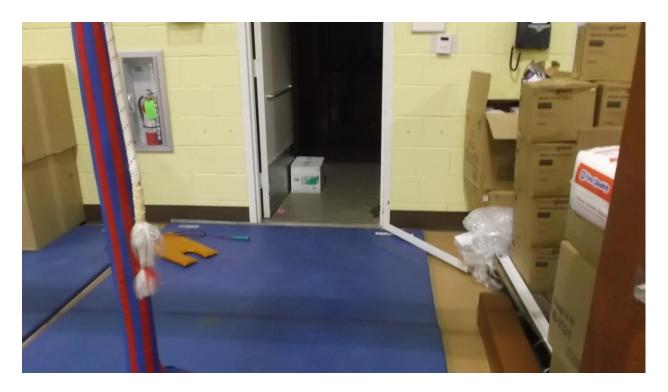

Gymnasium Flooring along the Entry to Adjacent Spaces.



Gymnasium Flooring and Cove Base along the Entry to Adjacent Spaces to be replaced.

Via Email: johsus@bergen.org

Bergen County Technical School District 540 Farview Avenue, Room 2300 Paramus, NJ 07652

Attention: Mr. John Susino,

Business Administrator/Board Secretary

Subject: Indoor Air Quality (IAQ)

Sampling for Mercury in Gym Bergen County Special Services Bleshman Regional Day School 333 East Ridgewood Avenue Paramus, New Jersey LAN Ref. #2.20210.20.1

Dear Mr. Susino:

Pursuant to your authorization, LAN Associates, Engineering, Planning, Architecture, Surveying, Inc. (LAN) collected air samples for mercury analysis in the gym at the subject facility. LAN also screened the air in the gym and in the rooms immediately surrounding the gym for mercury using a mercury vapor analyzer, and for basic indoor air quality parameters.

This letter report includes a description of the sampling and screening event, analytical results, and our recommendations.

It should be noted that the samples and screening discussed below indicate the air quality of the sampled/screened parameters in the sampled/screened locations at the time of sampling/screening, and do not represent the air quality at other times, or in other areas of the building.

It should also be noted that in order to create a worst-case scenario for mercury sampling and screening, the HVAC system was turned off several days prior to sampling and remained off throughout the sample collection and screening activities described below. The gym doors remained closed prior to and during sampling and screening. LAN understands that the gym is currently closed to students and is not being used.

Air Sampling for Mercury

Air samples were collected on May 28, 2019 over an approximate 8-hour period using solid sorbent tubes for mercury analysis using NIOSH Method 6009. The solid sorbent tubes and pumps were provided by EMSL Analytical, Inc. of Cinnaminson, New Jersey. The pumps used for sample collection were set to a

flow rate of 0.2 liters per minute (lpm). The pumps were field calibrated with a rotameter at the start of sample collection.

The samples collected for mercury analysis are summarized as follows:

- Sample S-1: One solid sorbent tube and pump were set up in the northwest corner of the gym on a table approximately 28 inches above the gym floor. This height is expected to be close to the breathing zone of many of the students that would use the gym. The pump was set up at approximately 8:44 a.m. The sample collection was completed at approximately 4:44 p.m.
- Sample S-2: One solid sorbent tube and pump were set up in the east/center portion of the gym on a table approximately 30 inches above the gym floor. This height is expected to be close to the breathing zone of many of the students that would use the gym. The pump was set up at approximately 8:48 a.m. The sample collection was completed at approximately 4:48 p.m.
- Samples Blank 1 and Blank 2: As required by NIOSH Method 6009, two field blanks (Blank 1 and Blank 2) were also submitted for analysis. Samples Blank 1 and Blank 2 were prepared at 8:49 a.m. and 8:50 a.m., respectively.

The solid sorbent tubes were submitted to EMSL Analytical, Inc. (EMSL) in Cinnaminson, New Jersey the following day for analysis for mercury using NIOSH Method 6009, with a two-week turnaround time.

The analytical results are summarized in the table below in nanograms per cubic meter (ng/m³).

Sample S-1: Sample S-2: Northwest East/Center Blank 1 Blank 2 Corner of Portion of Gym Gym Compound ng/m³ ng/m³ ng/m³ ng ND ND (Reporting (Reporting

1,900

Limit of 10

ng)

Limit of 10

ng)

Table 1 – Analytical Results from Mercury Sampling 5/28/2019

Notes: ND = Not Detected

1.600

The chain of custody and complete analytical results are included as Attachment #1.

Per the "Guidance for New Jersey Schools: Evaluating Mercury in Synthetic Flooring" from the New Jersey Department of Health (Attachment #2), mercury levels below 800 ng/m3 are protective of preschool-aged children. The concentrations of mercury detected in both Sample S-1 and Sample S-2 exceed this level.

Both of the mercury sample results were below the applicable Occupational Safety and Health Administration (OSHA) Permissible Exposure Limit (PEL) of 100,000 ng/m3; the National Institute for Occupational Safety and Health (NIOSH) Recommended Exposure Limit (REL) of 50,000 ng/m3; and the American Conference of Governmental Industrial Hygienists (ACGIH) Threshold Limit Value (TLV) of 25,000 ng/m³.

IAQ & Mercury Screening

Mercury

On May 28, 2019, the air at various locations within and near the gym at the subject facility was screened for mercury using a Jerome J505 Mercury Vapor Analyzer, and for several basic indoor air quality parameters, including carbon dioxide, carbon monoxide, temperature, and relative humidity using a TSI Incorporated Model 7545 IAQ-Calc Indoor Air Quality Meter. Copies of the Certificates of Calibration for these instruments is included as Attachment #3.

The air was screened in several locations throughout the gym and in several surrounding classrooms and hallways. Specifically, the areas screened included the gym; a small hallway connecting the gym to a main hallway in the school building; Rooms 113 and 114; a main hallway in the school building near the gym; and the lobby/security desk area near the front entrance. The gym and the small hallway connecting the gym to a main hallway contain rubberized flooring. The remaining areas screened contain vinyl tile flooring. The air was also screened outdoors near the front entrance to provide a background measurement.

Screening measurements were collected at floor level, approximately three (3) feet above floor level, and approximately five (5) feet above floor level to observe if there are variations in the mercury concentrations at different heights. Measurements were collected in these locations in the morning when the pump and tube samples were set up, and again in the afternoon prior to collecting the pump and tube samples.

Within the gym, mercury was measured at concentrations ranging from 910 to 1,470 ng/m³. In the hallway with rubberized flooring connecting the gym to the main hallway, mercury was measured at concentrations ranging from 1,190 to 2,360 ng/m³.

In the areas near the gym with vinyl tile flooring that were screened, mercury was measured at concentrations ranging from 0 to 310 ng/m³.

Carbon dioxide was measured at concentrations ranging from 430 to 700 parts per million (ppm) throughout the building. All of the carbon dioxide measurements are below the OSHA PEL, NIOSH REL, and ACGIH TLV of 5,000 ppm. Indoor carbon dioxide measurements above 1,000 ppm generally indicate inadequate ventilation. However, all carbon dioxide measurements were below 1,000 ppm.

Relative humidity was detected at levels ranging from 49.6% to 59.7% throughout the building. Relative humidity was detected at 58.6% to 64.3% in the outdoor air. According to the USEPA publication *IAQ Building Education and Assessment Model (I-BEAM)* dated 2002, indoor humidity levels should be between 30 and 50%. However, as noted above, the HVAC system was turned off prior to and during the sampling and screening activities discussed herein.

Carbon monoxide was not detected in any screening location.

The temperature was measured to range from 69.7 to 72.1°F during sampling and screening.

The results of the IAQ and mercury screening measurements are summarized in the table that is included as Attachment #4.

Conclusions & Recommendations

As discussed above, the mercury concentrations measured and sampled in the gym and the hallway leading to the gym that has the same rubberized flooring exceeded the level of 800 ng/m³ that is specified by the New Jersey Department of Health as being protective of preschool-aged children. The mercury concentrations measured with the mercury vapor analyzer in the areas near the gym that have vinyl tile flooring did not exceed this level.

LAN recommends that the rubberized flooring be removed and properly disposed. The areas with rubberized flooring should remain closed to students and should not be used by students until the floor has been removed and clearance air screening indicates that mercury concentrations have been reduced below 800 ng/m³.

If you have any questions regarding this report, or require any additional services, please do not hesitate to contact me directly at (201) 447-6400, or via email at steven.ramiza@lanassociates.com.

Respectfully submitted,

LAN Associates, Engineering, Planning, Architecture, Surveying, Inc.

Steven J. Ramiza, P.E., Vice President

Attachments:

#1 – Analytical Results & Chain of Custody for Air Samples;


#2 - Guidance from New Jersey Department of Health;

#3 - Equipment Calibration Certificates;

#4 - Summary of IAQ & Mercury Vapor Analyzer Screening.

 $SR: bb: ac/P: \c 1000-AE \c 1000-20299 \c 1000-2010 \c$

cc: File # 2.20210.20.1, w/atts. (Digital)

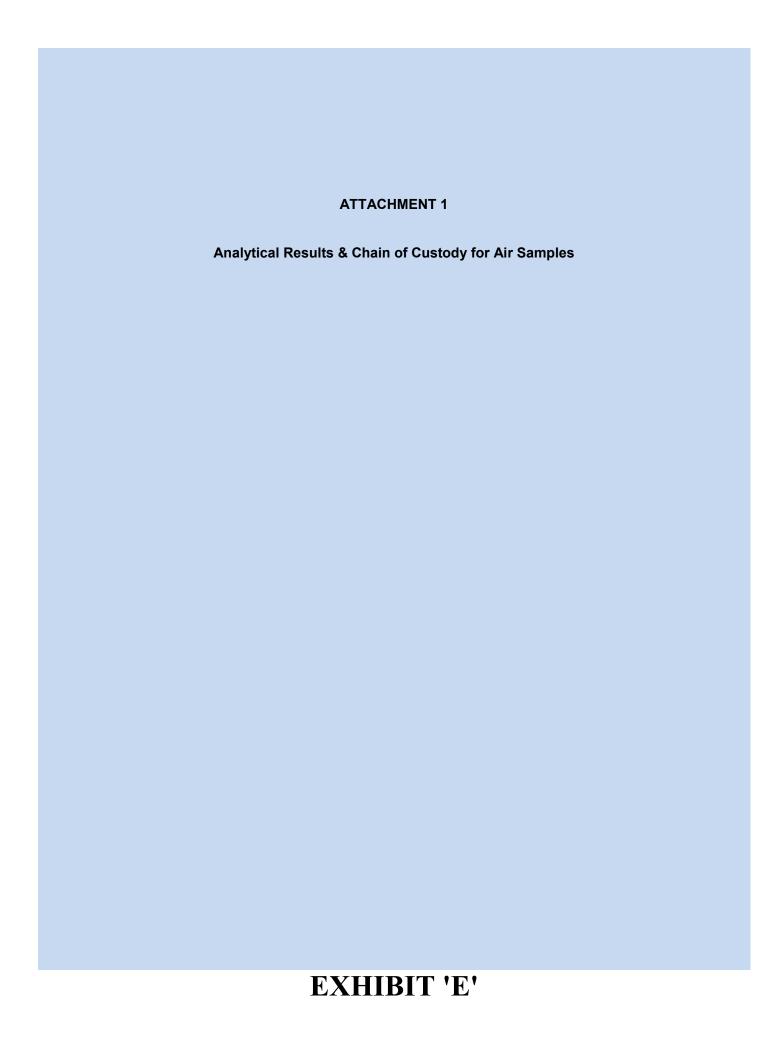



EMSL Analytical, Inc.

200 Route 130 North, Cinnaminson, NJ 08077

hone: (856) 303-2500 Fax: (856) 858-4571 Email: EnvChemistry2@emsl.com

Attn:

Anthony Capozza LAN ASSOCIATES, INC. 445 Godwin Avenue Midland Park, NJ 07432

Phone: (201) 447-6400 Fax: (201) 447-1233

The following analytical report covers the analysis performed on samples submitted to EMSL Analytical, Inc. on 5/30/2019. The results are tabulated on the attached data pages for the following client designated project:

2.20210.20.1

The reference number for these samples is EMSL Order #011906586. Please use this reference when calling about these samples. If you have any questions, please do not hesitate to contact me at (856) 303-2500.

Approved By:

6/12/2019

Phillip Worby, Environmental Chemistry Laboratory
Director



AIHA-LAP, LLC-IHLAP Lab # 100194 NELAP Certification: NJ 03036; NY 10872

The samples associated with this report were received in good condition unless otherwise noted. This report relates only to those items tested as received by the laboratory. The QC data associated with the sample results meet the recovery and precision requirements established by the AIHA, unless specifically indicated. The final results are not field blank corrected. The laboratory is not responsible for final results calculated using air volumes that have been provided by non-laboratory personnel. This report may not be reproduced except in full and without written approval by EMSL Analytical, Inc.



EMSL Analytical, Inc.

200 Route 130 North, Cinnaminson, NJ 08077 Phone/Fax: (856) 303-2500 / (856) 858-4571

http://www.EMSL.com EnvChemistry2@emsl.com

EMSL Order: 011906586 CustomerID: LANA50 CustomerPO: 2.20210.20.1

ProjectID:

Attn: Anthony Capozza
LAN ASSOCIATES, INC.
445 Godwin Avenue
Midland Park, NJ 07432

Phone: (201) 447-6400 Fax: (201) 447-1233 Received: 05/30/19 9:25 AM

Project: 2.20210.20.1

Ana	lytical	Results	

Client Sample Descrip	tion S-1 Bleshman Northwest Corner		Collected: 5/28/20	19 Lab ID:	011906586-0001
Method	Parameter	Result	RL Units	Prep Date & Analyst	Analysis Date & Analyst
METALS					
NIOSH 6009	Mercury	0.0016	0.00010 mg/m ³	6/10/2019 PV	6/10/2019 P\
Client Sample Descrip	tion S-2 Bleshman Eastside near Cente	er	Collected: 5/28/20	19 Lab ID:	011906586-0002
Method	Parameter	Result	RL Units	Prep Date & Analyst	Analysis Date & Analyst
METALS					
NIOSH 6009	Mercury	0.0019	0.00010 mg/m ³	6/10/2019 PV	6/10/2019 P
Client Sample Descrip	tion B-1 Bleshman Blank 1		Collected: 5/28/20	19 Lab ID:	011906586-0003
Method	Parameter	Result	RL Units	Prep Date & Analyst	Analysis Date & Analyst
METALS					
NIOSH 6009	Mercury	ND	0.000010 mg/tube	6/10/2019 PV	6/10/2019 PV
			.		
Client Sample Descrip	tion B-2 Bleshman Blank 2		Collected: 5/28/20	19 Lab ID:	011906586-0004
Client Sample Descrip Method		Result	Collected: 5/28/20	19 Lab ID: Prep Date & Analyst	011906586-0004 Analysis Date & Analyst
	Bleshman Blank 2	Result		Prep	Analysis

Definitions:

MDL - method detection limit

J - Result was below the reporting limit, but at or above the MDLND - indicates that the analyte was not detected at the reporting limit

RL - Reporting Limit (Analytical)

D - Dilution

Comments:		ig day	Released By	Note: Most N					8-2	B-1	S-2)S-1	Client Sample ID	X2 Week	Turnaro	# Samples in Shinment:		Bhone: 701-417	Street: T		Report To Co	EMSL ANALYTICAL, INC.	EMSL
	7	Enni "	y toy Enn	IOSH and OSH					5/28/19	5/28/19	5/28/19	5/28/19	Sample Date	☐ 1 Week	Turnaround Time (TAT)	Shinmant.	010000	WATER TO	_	1	t Name:	CAL, INC.	
			*	Most NIOSH and OSHA methods require field blanks.					Bleshonan	Bleshman	Bleshman	Bleshman	Location			1	0 70 1	Bhone: 70) - Clift of State/Province: N	SOCIONA AVE	000	,		
		65							Blank 2	Blank 1	Near Center	Corner	Description	□ 3 Day □	Please Check: If No Selection Made	Date of Shinment. 5/8/0	-		1/2	うして	Capazza		
		5/12/19	Date	It is the IH field sampler's responsibility to submit the proper	☐ Area ☐ Personal	☐ Area ☐ Personal	☐ Area ☐ Personal	□ Area □ Personal	Area Personal	X Area ☐ Personal	X Area ☐ Personal	Area ☐ Personal	Sample Type	2 Day	on Made Sta			ZipiPostai code: U++34	3		0	EMSL Order Number (Lab Use Only):	Chain
		16:00	77	pler's respon					0	0	0.2	0.2	Flow (lpm)	1 Day	Standard 2 Week TAT Will Apply	Burchase Order: 2 20210 201				Att	Bi	Order Number (Lab Use	25 712
(79	D	Received By	sibility to su					8:50	BH:8	8418	14: HH:8	Sampl On	Other (leek TAT V	2 20210	THOIR. 10	Phone: 201-141	Street: 74	Attention To: HATTOO	Bill To Company: LAN ASSOCIATES	1 (Lab Use Only)	NA.
	R	1	У	bmit the pro					8:50	bh:8	81.484.48	H.H.	Sample Time On Off	Other (Call Lab)	Vill Apply	- 1	114	JUNIONIA PULIS	COOWIN	X	my: LAZ		
									0	0			Air Volume	Manu		1000S	0770@	2	JUNION !	4	ASSOC		
				of field blanks					NIOS HUDO	West may	Mercum	Mescural NIOSH GOCY	Analyte Name	Manufacturer/Part #:	Media Type:	Socialis de	Tax.		Ave Sw		iares		
				number of field blanks and duplicates.						30			Media	t#:	П	Ale Wilete Sall			-4	2	Client ID #:	PHO	0.7
	4.25. 50		Date	S.									Comments	Lot #:		Sampled By (Signatura).	+ 10 / 1	LIDIPOSTAL CODE: () +4 22	3		D #:	CINNAMINSON, NJ 08077 PHONE: (800) 220-3675 FAX: (856) 858-3502	ZUU KUUTE TUU NUKTE



Guidance for New Jersey Schools: Evaluating Mercury in Synthetic Flooring

The New Jersey Department of Health is providing this fact sheet to New Jersey school districts concerned about mercury exposure from synthetic flooring.

What types of floors contain mercury?

The types of floors that may contain mercury are solid, rubber-like synthetic flooring manufactured from about 1960 until the 1990s. Not all synthetic flooring contains mercury. Flooring made using a catalyst known as "phenyl mercuric acetate" may release mercury vapors into the air under certain conditions. Not all flooring that contains mercury emit mercury vapors into the air.

What should you do if your school has a synthetic floor?

- Check to see if you can determine if the flooring contains mercury by contacting the manufacturer/installer or reviewing the Safety Data Sheet (SDS).
- If you are able to determine that the flooring contains mercury or you suspect it contains mercury, work with a qualified environmental consultant to evaluate the flooring and determine next steps.
- If indoor air sampling is recommended, it should be done under normal school operating conditions.

What levels of mercury are considered safe for school children and staff?

The New Jersey Department of Health (NJDOH) has adopted Standards for Indoor Environment Certification and for Licensure of Indoor Environmental Consultants (N.J.A.C. 8:50). These regulations provide a risk assessment model that can be used to evaluate indoor air contaminants for school children and staff. Your indoor environmental consultant can use this risk model to determine a Maximum Contaminant Level (MCL) for mercury in your school. Alternatively, your consultant may evaluate the indoor air data to ensure that mercury levels are below $0.8\mu g/m^3$ which is based on the exposure scenario in the risk model that is protective of preschool-aged children.


N.J.A.C. 8:50 is available on the NJDOH website at:

http://www.nj.gov/health/ceohs/documents/eohap/njac_850_adoption.pdf



Division of Epidemiology, Environmental and Occupational Health Consumer, Environmental and Occupational Health Service Environmental and Occupational Health Surveillance Program www.nj.gov/health/ceohs



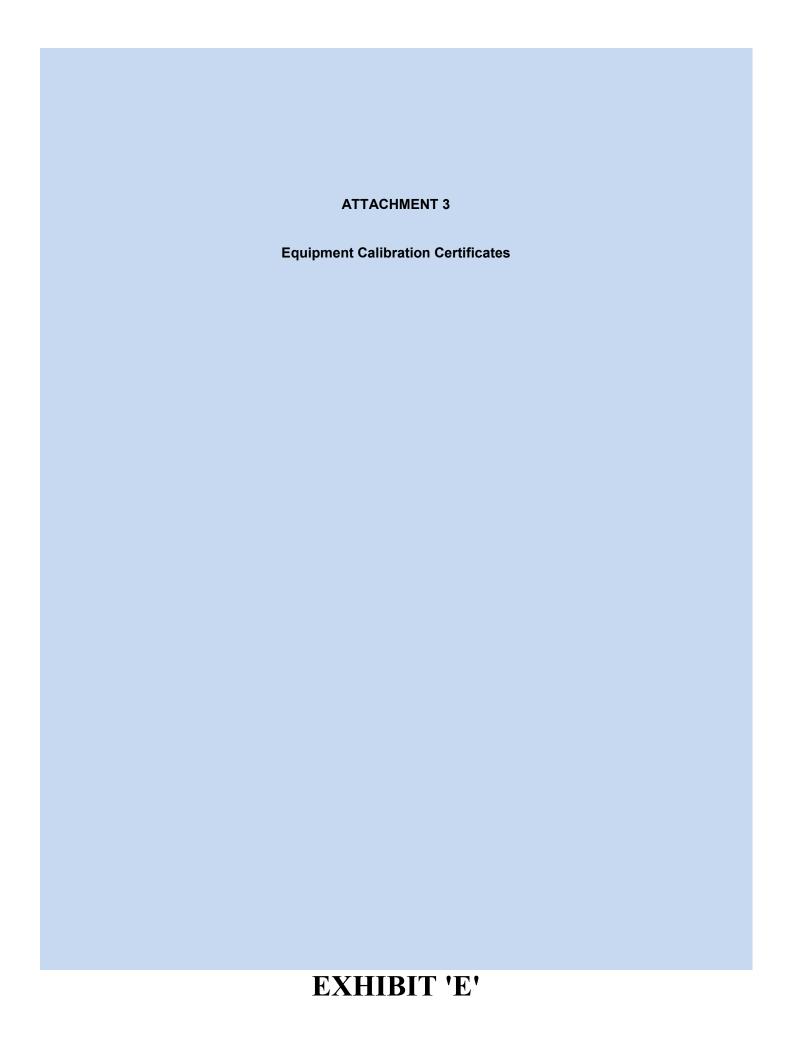



INSTRUMENT CALIBRATION REPORT

Pine Environmental Services LLC

92 North Main St, Building 20 Windsor, NJ 08561 Toll-free: (800) 301-9663

Pine Environmental Services, Inc.

Instrument ID 38344

Description Jerome J505

Calibrated 5/22/2019 2:47:59PM

Manufacturer Arizona

Model Number J505

Serial Number/Lot 50500232

Number

Location New Jersey

Department

State Certified

Status Pass

Temp °C 25.4

Humidity % 18

Calibration Specifications

Group # 1

Group Name Warmup, Purge, and Sample

Test

Test Performed: Yes

As Found Result: Pass

As Left Result: Pass

Test Instruments Used During the Calibration

(As Of Cal Entry Date)

Test Standard ID Description

Manufacturer

Model Number Lot Number

Serial Number /

<u>Next Cal Date /</u>
<u>Last Cal Date / Expiration Date</u>

Opened Date

Notes about this calibration

Calibration Result Calibration Successful

Who Calibrated Daniel Teller

All instruments are calibrated by Pine Environmental Services LLC according to the manufacturer's specifications, but it is the customer's responsibility to calibrate and maintain this unit in accordance with the manufacturer's specifications and/or the customer's own specific needs.

Notify Pine Environmental Services LLC of any defect within 24 hours of receipt of equipment Please call 800-301-9663 for Technical Assistance

Pine Environmental Services LLC Windsor Industrial Park, 92 North Main Street, Bldg 20, Windsor, NJ 08561, 800-301-9663 www.pine-environmental.com



3375 N. Delaware Street, Chandler, AZ 85225 800.528.7411 | (f) 602.281.1745 | azic.com

Certification of Instrument Calibration

Pine Environmental Services LLC 92 N. Main St. Bidg 20 Windsor, NJ 08561 RMA# 2645853

This is to certify that the Jerome J505-0005 Atomic Fluorescence Mercury Analyzer, Serial Number 50500232, was calibrated with standard units traceable to NIST.

Calibration Status as Received:

Out of Calibration

	Actual	Calibration Gas	Allowable Range
Incoming:	28.70 μg/m3 Hg 0.49 % RSD	25.00 μg/m3 Hg	22.50 - 27.50 μg/m3 Hg <5%
Outgoing:	25.32 μg/m3 Hg 0.20 % RSD	25.00 μg/m3 Hg	23.75 - 26.25 μg/m3 Hg <3%
Calibration Verification:	μg/m3 Hg % RSD	0.300 µg/m3 Hg	0.255 - 0.345 μg/m3 Hg <15%

Calibration Status as Left: In Calibration

Estimated Uncertainty of Calibration System: 3.5%

Calibration Date: 22-Mar-2019 Recalibration Date: 21-Mar-2020

Temperature °F: 71.40

% Relative Humidity: 24.90

Approved By:

Title: Cheryl Hradek - Quality Control

Date Approved: 02-Apr-2019

Equipment Used:

Permeation Tube: 498-51337 NIST#: ISO13265; 072958

Calibration Date: 29-May-2018 Calibration Date Due: 29-May-2019

DynaCalibrator: M-812 NIST#: 18-2889

Calibration Date: 19-Sep-2018 Calibration Date Due: 20-Sep-2019

Digital Multimeter: 74620505 NIST#: 7002611

Calibration Date: 07-Apr-2018 Calibration Date Due: 07-Apr-2019

Mass Flow Controller: 54810 NIST#:132036

Calibration Date: 25-Jun-18 Calibration Date Due: 25-Jun-19

Calibration Procedure Used: 730-0165

AMETEK Brookfield certifies that the above listed instrument meets or exceeds all published specifications and has been calibrated using standards whose accuracy is traceable to the NATIONAL INSTITUTE OF STANDARDS AND TECHNOLOGY within the limitations of the Institute's calibration services, or have been derived from accepted values of natural physical constants, or have been derived by the ratio type of self-calibration techniques.

Disclaimer: Any unauthorized adjustments, removal or breaking of QC seals, or other customer modifications on your Jerome Analyzer WILL VOID this factory calibration, because any of the above acts could affect the calibration and readings of the instrument. Further, AMETEK Brookfield WILL NOT be responsible for any liabilities created as a result of using the instrument after such adjustments, seal removal, or modifications.

This document shall not be reproduced, except in full, without the written approval of AMETEK Brookfield.



CERTIFICATE OF CALIBRATION AND TESTING

TSI Incorporated, 500 Cardigan Road, Shoreview, MN 55126 USA Tel: 1-800-874-2811 1-651-490-2811 Fax: 1-651-490-3824 http://www.tsi.com

ENVIRONMENT CONDITION	S		Model	7545	
TEMPERATURE	76.2 (24.6)	°F (°C)	- IMODEL	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
RELATIVE HUMIDITY	23	%RH	Curvin Nancon	T75451507001	
BAROMETRIC PRESSURE	29.13 (986.5)	986.5) inHg (hPa) SERIAL NUMBER		175451507001	

AND A SECURITION OF THE WARRANT OF	
🛮 As Left	☐ IN TOLERANCE
☐ AS FOUND	☐ OUT OF TOLERANCE

-CALIBRATION VERIFICATION RESULTS-

HUMIDITY VERIFICATION				Syst	EM H-102	Unit: %RH		
#	STANDARD	MEASURED	ALLOWABLE RANGE	#	STANDARD	MEASURED	ALLOWABLE RANGE	
1	10.0	9.4	7.0~13.0	4	70.0	63.0	67.9-73.0	
2	30,0	28.8	27.0~33.0	5	90.0	87.5	87.0-93.0	
3	49.9	48.4	46.9~52.9					

TEMPERATURE VERIFICATION			TTTTTT	S	YSTEM T-101	Unit: °F (°C)		
#	STANDARD	MEASURED	ALLOWABLE RANGE	#	STANDARD	MEASURED	ALLOWABLE RANGE	
1	32.0 (0.0)	31.7 (-0.2)	31.0~33.0 (-0.6~0.6)	2	140.0 (60.0)	140.4 (60.2)	139.0~141.0 (59.4~60.6)	

CO2 GAS VERIFICATION				Unit: ppm			
#	STANDARD	MEASURED	ALLOWABLE RANGE	# [STANDARD	MEASURED	ALLOWABLE RANGE
1	0	0	0~50	4	3018	2987	2928~3109
2	505	500	455~555	5	5000	4984	4850~5150
3	1008	1016	958~1058				

CO GAS VERIFICATION				Unit: ppm			
#	STANDARD	MEASURED	ALLOWABLE RANGE	#	STANDARD	MEASURED	ALLOWABLE RANGE
1	- 35	36	32~38	2	101	- 99	98~104

TSI does hereby certify that the above described instrument conforms to the original manufacturer's specification (not applicable to As Found data) and has been calibrated using standards whose accuracies are traceable to the United States National Institute of Standards and Technology (NIST) or has been verified with respect to instrumentation whose accuracy is traceable to NIST, or is derived from accepted values of physical constants. TSI's calibration system is registered to ISO-9001-2015.


Measurement Variable	System ID	Last Cal.	Cal. Duc	Measurement Variable	System ID	Last Cal.	Cal. Due	
Humidity	E003539	02-15-19	08-31-19	Temperature	E003986	02-12-19	08-31-19	
Temperature	E003987	02-12-19	08-31-19	5000 CO2	T372995	12-06-18	08-27-21	
200 CO	CC716253	08-01-18	08-23-25	N2 1	FT758584	01-17-19	01-15-24	
Air	Γ44856	12-14-18	11-14-21	Flow 1	E003341	09.14-18	09-36-19	
Flow	600163	25-03-13	28-27-19-1	The X	Connic	02-28-18	03 11-15	
Flow	E003501	09-04-18	09-30-19	. 000 C4H8	EB0067116	08-17-17	08-08-21	
100 C4H8	FR0099433	09-29-17	09-29-21					

Sharof MEElmury

February 18, 2019

DATE

DOC ID CERT_GEN_WCC

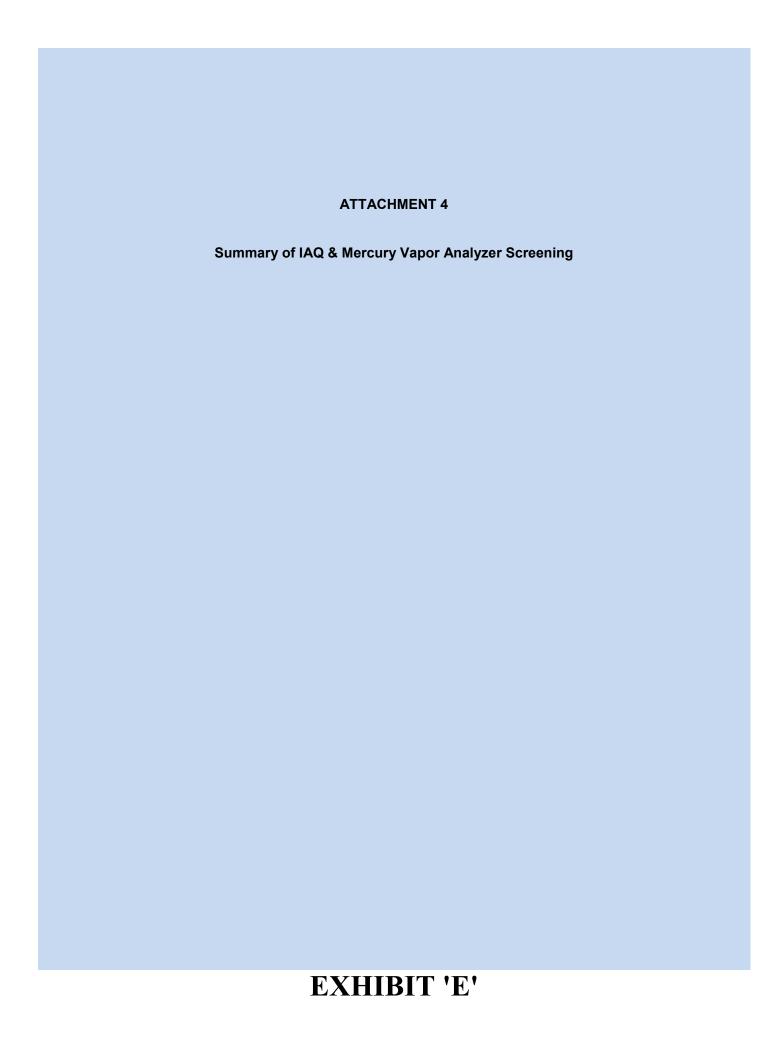

		IA	Q & Mercur	y Screening Meas	urements			
Location	Height above	Time (Mercury	Mercury	Time (IAQ Measurements)	Carbon Dioxide	Carbon Monoxide	Temperature	Relative Humidity
	floor (ft)	Measurements)	(ng/m³)	weasurements)	(ppm)	(ppm)	(°F)	(%)
Southeast C	orner of Gy	_					_	
	0	9:11 AM	1420	9:15 AM	520	0	71.7	51.3
	3	8:16 AM	1150	8:15 AM	507	0	71.1	53.1
	5	9:14 AM	1320	9:07 AM	490	0	71.5	51.7
Northeast Co	orner of Gyr	<u>n</u>						_
	0	9:07 AM	1470	9:11 AM	560	0	72.0	51.8
	3	8:19 AM	1190	8:09 AM	556	0	69.7	56.2
	5	9:23 AM	1390	9:04 AM	575	0	71.9	52.7
Northwest C	orner of Gy	<u>m</u>		_			_	
	0	9:04 AM	1290	9:12 AM	530	0	71.7	50.8
	3	8:23 AM	1250	8:13 AM	538	0	70.8	53.3
	5	9:31 AM	1150	9:05 AM	540	0	71.9	52.7
Southwest C	orner of Gy					•		1
	0	8:54 AM	1050	9:13 AM	500	0	71.7	51.3
	3	8:25 AM	1030	8:14 AM	525	0	70.8	53.7
	5	9:34 AM	1230	9:06 AM	520	0	71.8	51.9
Central Port	ion of Gym							
	0	8:57 AM	1290	9:17 AM	530	0	71.7	51.3
	3	8:28 AM	1150	8:16 AM	544	0	71.6	51.6
	3	-	ı	9:18 AM	640	0	72	51.4
	5	9:29 AM	1190	9:19 AM	620	0	72.1	51.2
Southeast/C	entral Portion	on of Gym (Near S	ample S-2)					
	0	9:01 AM	1320	9:20 AM	525	0	72.0	50.6
	3	8:31 AM	1150	9:21 AM	535	0	72.1	50.5
	5	9:26 AM	1220	9:22 AM	515	0	72.1	50.2
Hallway with	Rubberize	d Flooring (Near G	iym Door)					
	0	9:45 AM	1950	9:25 AM	505	0	70.4	52.4
	3	9:48 AM	1460	9:26 AM	600	0	70.7	53.1
	5	9:51 AM	1360	9:27 AM	660	0	70.7	52.8
Hallway with	Rubberize	d Flooring (Near M	lain Hallwa	<u>v)</u>				
	0	9:54 AM	1480	9:28 AM	535	0	70.6	52.0
	3	9:58 AM	1190	9:29 AM	610	0	70.7	52.1
	5	10:02 AM	1190	9:30 AM	565	0	70.7	52.0
Room 114								
	0	10:13 AM	140	9:31 AM	560	0	71.0	52.1
	3	10:16 AM	250	9:32 AM	545	0	70.8	52.2
	5	10:18 AM	120	9:33 AM	550	0	70.9	51.5
Room 113								
	0	10:21 AM	100	9:34 AM	525	0	70.3	53.2
	3	10:24 AM	170	9:35 AM	540	0	70.4	53.5
	5	10:26 AM	150	9:36 AM	595	0	70.3	53.9
Main Hallwa	y Near Roor	ns 113 & 114						
	0	10:29 AM	160	9:37 AM	500	0	69.8	52.9
	3	10:33 AM	300	9:38 AM	550	0	70.3	53.1
	5	10:36 AM	310	9:39 AM	530	0	70.4	53.4
Main Hallwa	y Near Roor	<u>ns 110 & 112</u>						
	0	10:39 AM	160	9:42 AM	470	0	71.2	50.8
	3	10:42 AM	160	9:43 AM	500	0	71.2	51.2
	5	10:44 AM	120	9:44 AM	700	0	71.3	52.0

Location	Height above	Time (Mercury	Mercury	Time (IAQ	Carbon Dioxide	Carbon Monoxide	Temperature	Relative Humidity
Location	floor (ft)	Measurements)	(ng/m³)	Measurements)	(ppm)	(ppm)	(°F)	(%)
Main Hallwa		n 201 & Gym Entra	ance		(Je Je /	(1-1/		1 (7-7
	0	10:47 AM	100	9:46 AM	490	0	70.9	49.6
	3	10:50 AM	100	9:47 AM	490	0	71.1	49.9
	5	10:53 AM	50	9:48 AM	520	0	71.2	50.7
Main Hallwa	Near Roor	n 210						
	0	10:57 AM	0	9:49 AM	480	0	71.0	49.8
	3	11:00 AM	120	9:50 AM	550	0	70.9	50.3
	5	11:03 AM	4	9:51 AM	575	0	71.1	50.9
Lobby/Secur	ity Desk Ne	ar Front Entrance						
	0	11:09 AM	100	9:52 AM	510	0	70.3	49.8
	3	11:13 AM	90	9:52 AM	560	0	70.7	50.0
	5	11:15 AM	50	9:53 AM	500	0	70.4	50.5
<u>Outdoors</u>								
	0	11:18 AM	80	-	-	=	-	-
	3	11:21 AM	0	9:54 AM	430	0	65.3	64.3
	5	11:24 AM	10	-	-	-	-	-
Southeast C	orner of Gyı	<u>m</u>						
	0	2:45 PM	1140	2:45 PM	496	0	71.7	57.4
	3	2:48 PM	1170	2:48 PM	511	0	71.8	57.3
	5	2:51 PM	1000	2:51 PM	570	0	71.8	56.9
Northeast Co	orner of Gyr	<u>n</u>						
	0	3:02 PM	1160	3:02 PM	515	0	71.7	56.5
	3	3:05 PM	1120	3:05 PM	508	0	71.8	56.4
	5	3:08 PM	1340	3:08 PM	538	0	71.8	56.5
Northwest C	orner of Gy	<u>m</u>			Ť	·		Ť
	0	3:39 PM	1240	3:39 PM	504	0	71.7	56.5
	3	3:42 PM	1050	3:42 PM	527	0	71.7	57.9
	5	3:45 PM	1120	3:45 PM	682	0	71.8	58.1
Southwest C	orner of Gy				Ť	·		Ť
	0	3:51 PM	1030	3:51 PM	532	0	71.6	58.9
	3	3:54 PM	970	3:54 PM	557	0	71.5	58.6
	5	3:57 PM	910	3:57 PM	650	0	71.8	59.0
Central Porti		<u> </u>		1 -	1	1	ı	I .
	0	3:29 PM	1430	3:29 PM	496	0	71.7	55.7
	3	3:31 PM	1250	3:31 PM	539	0	71.7	56.3
0 (1 ::=	5	3:34 PM	1020	3:34 PM	537	0	71.8	55.8
Southeast/C		on of Gym (Near S						I
	0	3:18 PM	1150	3:18 PM	516	0	71.9	55.4
	3	3:21 PM	1030	3:21 PM	545	0	71.9	55.4
Haller 22	5 D ubbasisa	3:24 PM	1030	3:24 PM	511	0	71.9	55.6
Hallway with		d Flooring (Near G		4.00.000	404			
	0	4:03 PM	2360	4:03 PM	481	0	71.7	55.7
	3	4:06 PM	2280	4:06 PM	490	0	71.5	55.0
Hallorarre	5 Dubboris	4:09 PM	1980	4:09 PM	612	0	71.6	55.4
nailway with		d Flooring (Near M		T	F 10		7/2	
	0	4:14 PM	1900	4:14 PM	543	0	71.0	54.7
	3	4:17 PM	1810	4:17 PM	486	0	70.7	54.8
Dee::: 444	5	4:19 PM	1890	4:19 PM	561	0	70.9	55.0
Room 114		4.00	4-0	4.20.50.5	400		70 /	
	3	4:23 PM	170	4:23 PM	463	0	72.1	58.1

Location	Height above floor (ft)	Time (Mercury Measurements)	Mercury (ng/m³)	Time (IAQ Measurements)	Carbon Dioxide (ppm)	Carbon Monoxide (ppm)	Temperature (°F)	Relative Humidity (%)
Room 113								
	3	4:26 PM	190	4:26 PM	460	0	70.9	59.7
Main Hallwa	y Near Roon	ns 113 & 114						
	3	4:29 PM	210	4:29 PM	484	0	70.5	59.2
Main Hallwa	y Near Roon	ns 110 & 112						
	3	4:34 PM	70	4:34 PM	447	0	70.2	59.6
Main Hallwa	y Near Roon	n 201 & Gym Entra	ance					
	3	4:37 PM	110	4:37 PM	451	0	70.1	59.4
Main Hallwa	y Near Roon	n 210						
	3	4:40 PM	40	4:40 PM	465	0	70.3	57.8
Lobby/Secur	ity Desk Ne	ar Front Entrance						
	3	4:53 PM	80	4:53 PM	450	0	70.0	57.1
Outdoors								
	3	4:56 PM	20	4:56 PM	450	0	69.6	58.6