


pen table = E:\roadway\plot\plotbasic.tbl


queue = \\CADD\LT04\MrPDF\data\15001.00\0000-1.000000

date = 07-SEP-2004 15:35

ID = TPX0HA2 file = h:\road2\StdDef\cd2021.dgn

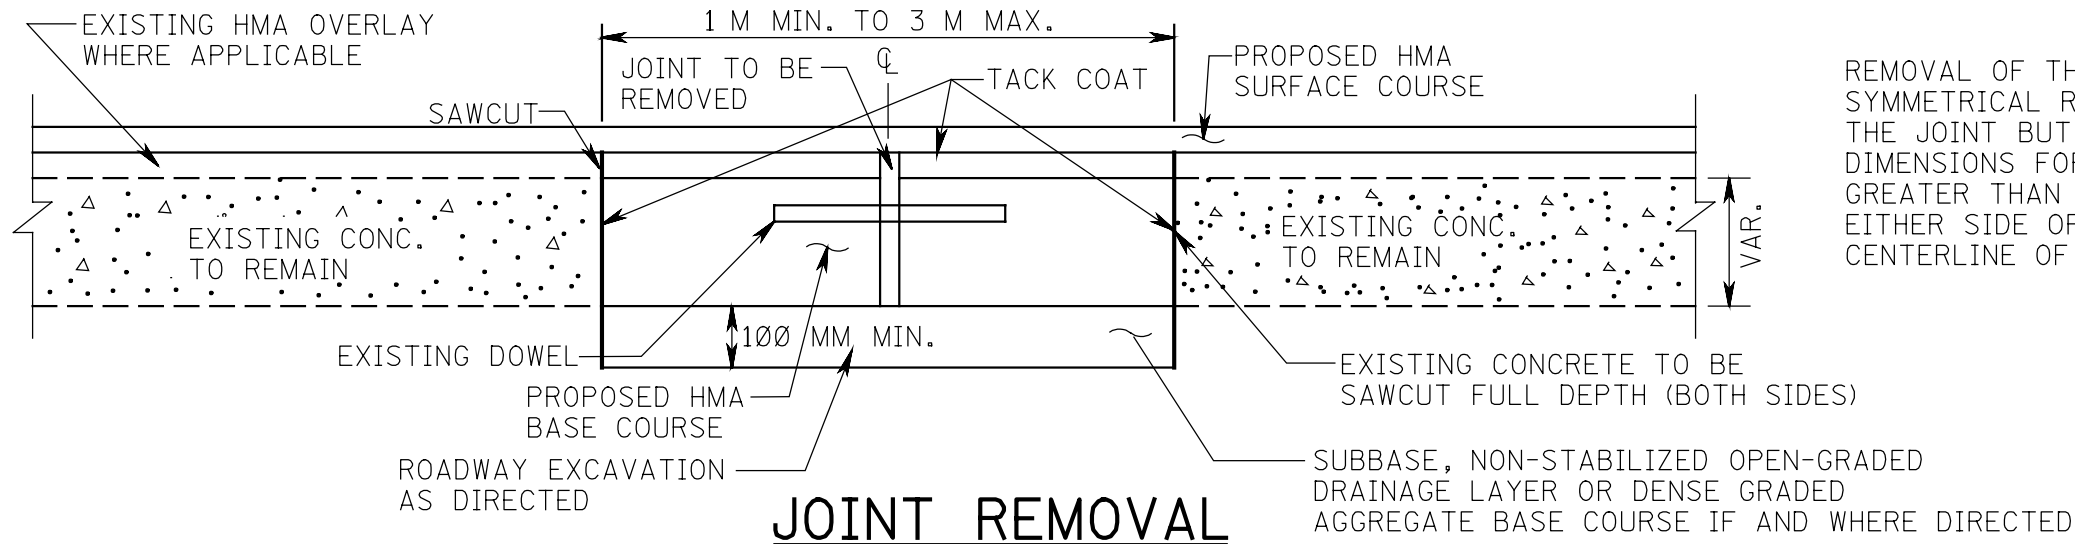


CD-202-1.1

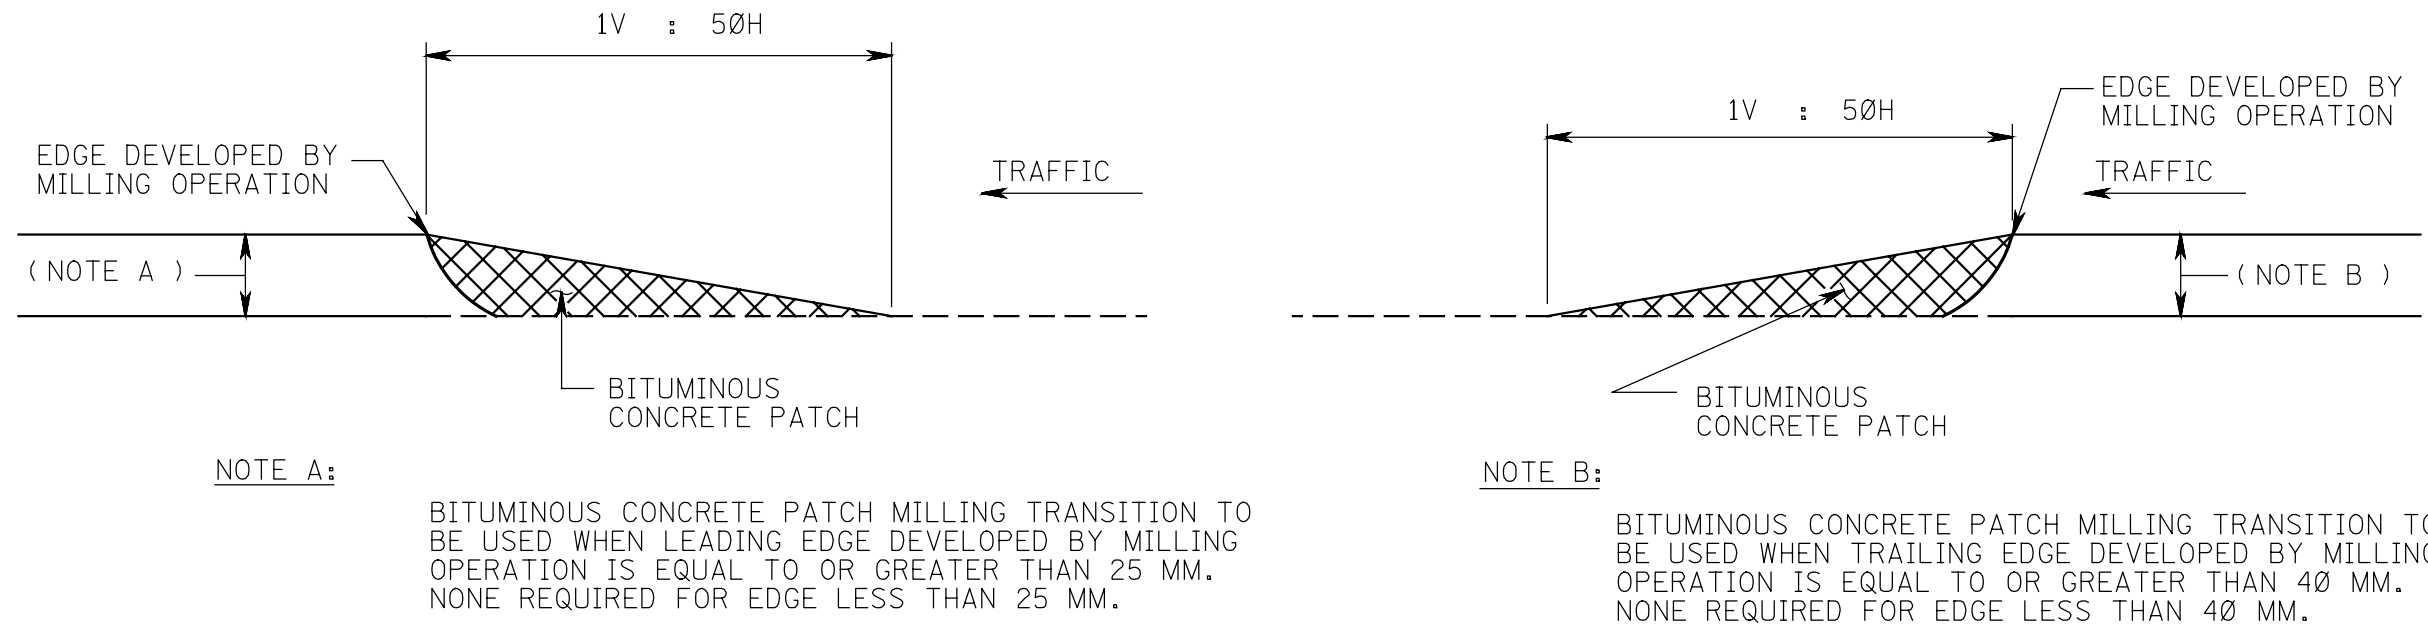



### MILLING TRANSITIONS

CD-202-1.2

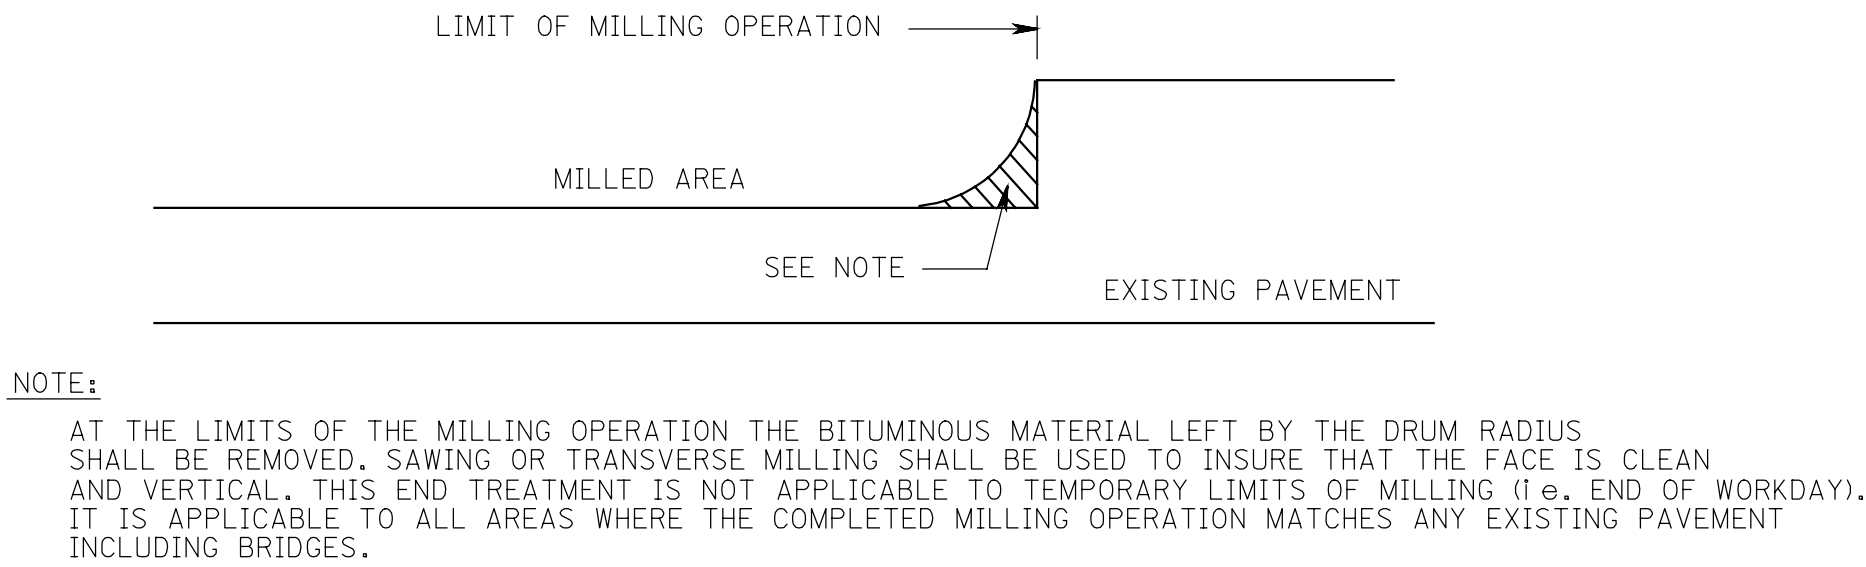

### END TREATMENT FOR MILLING OPERATIONS

CD-202-1.3

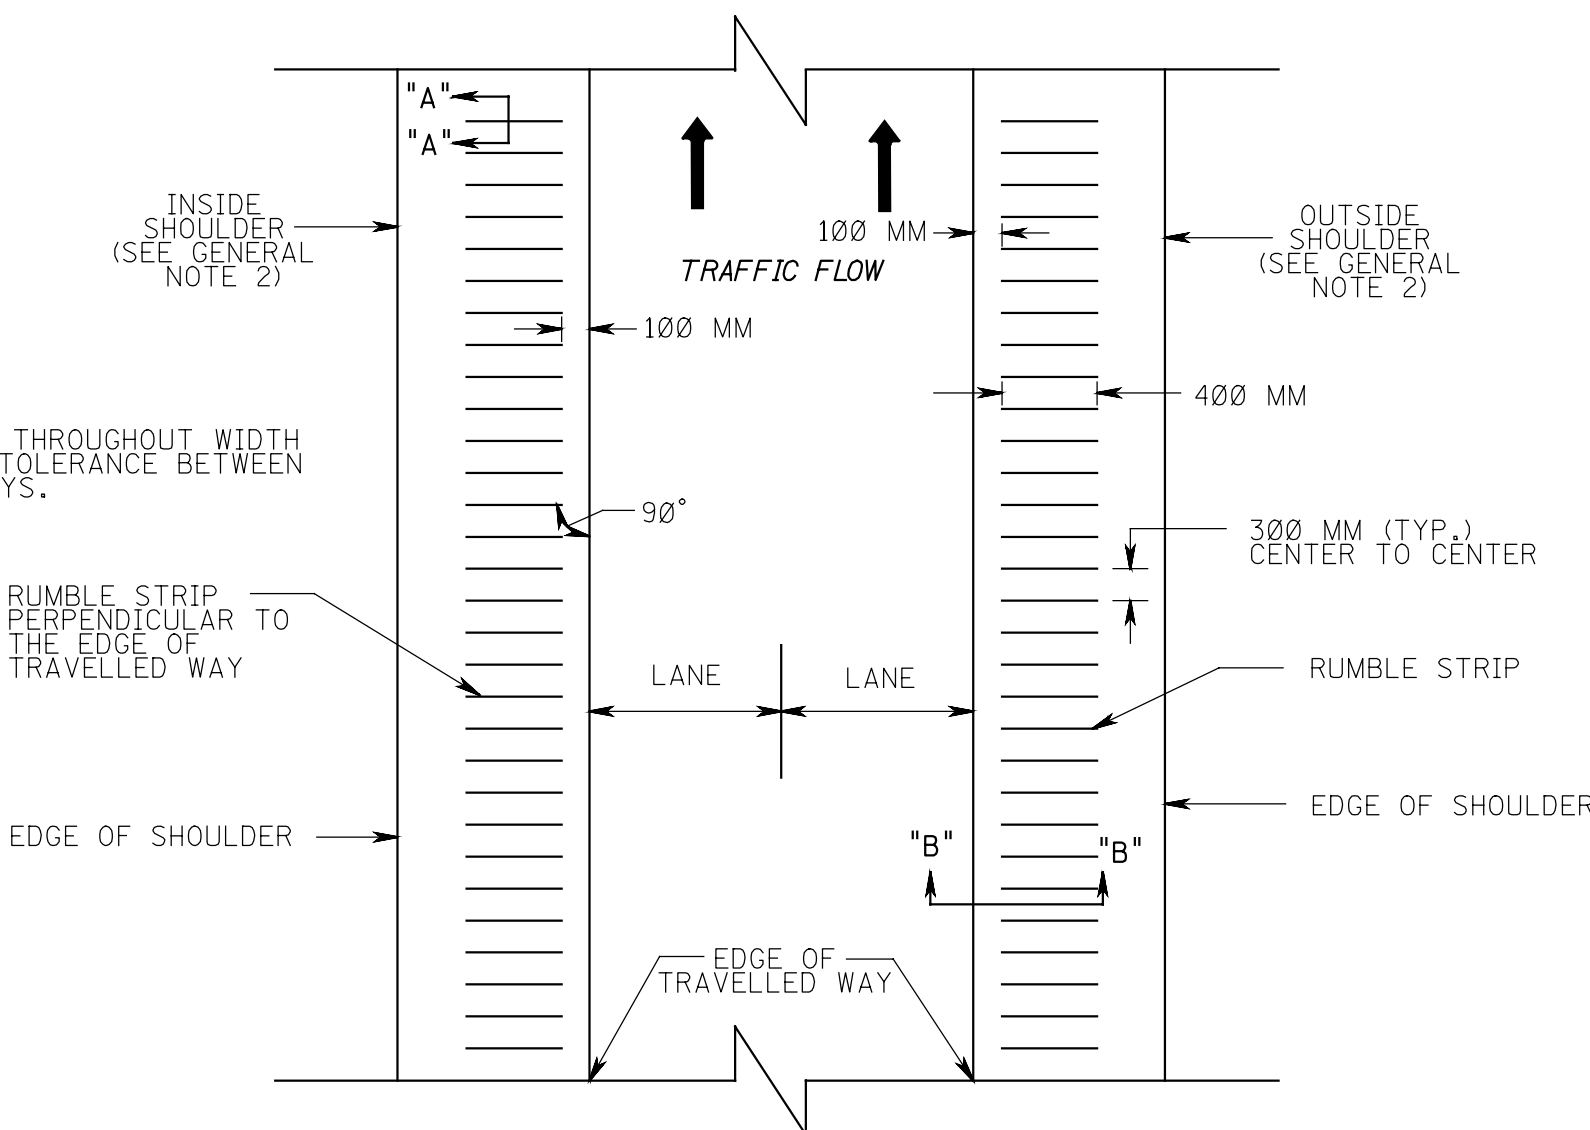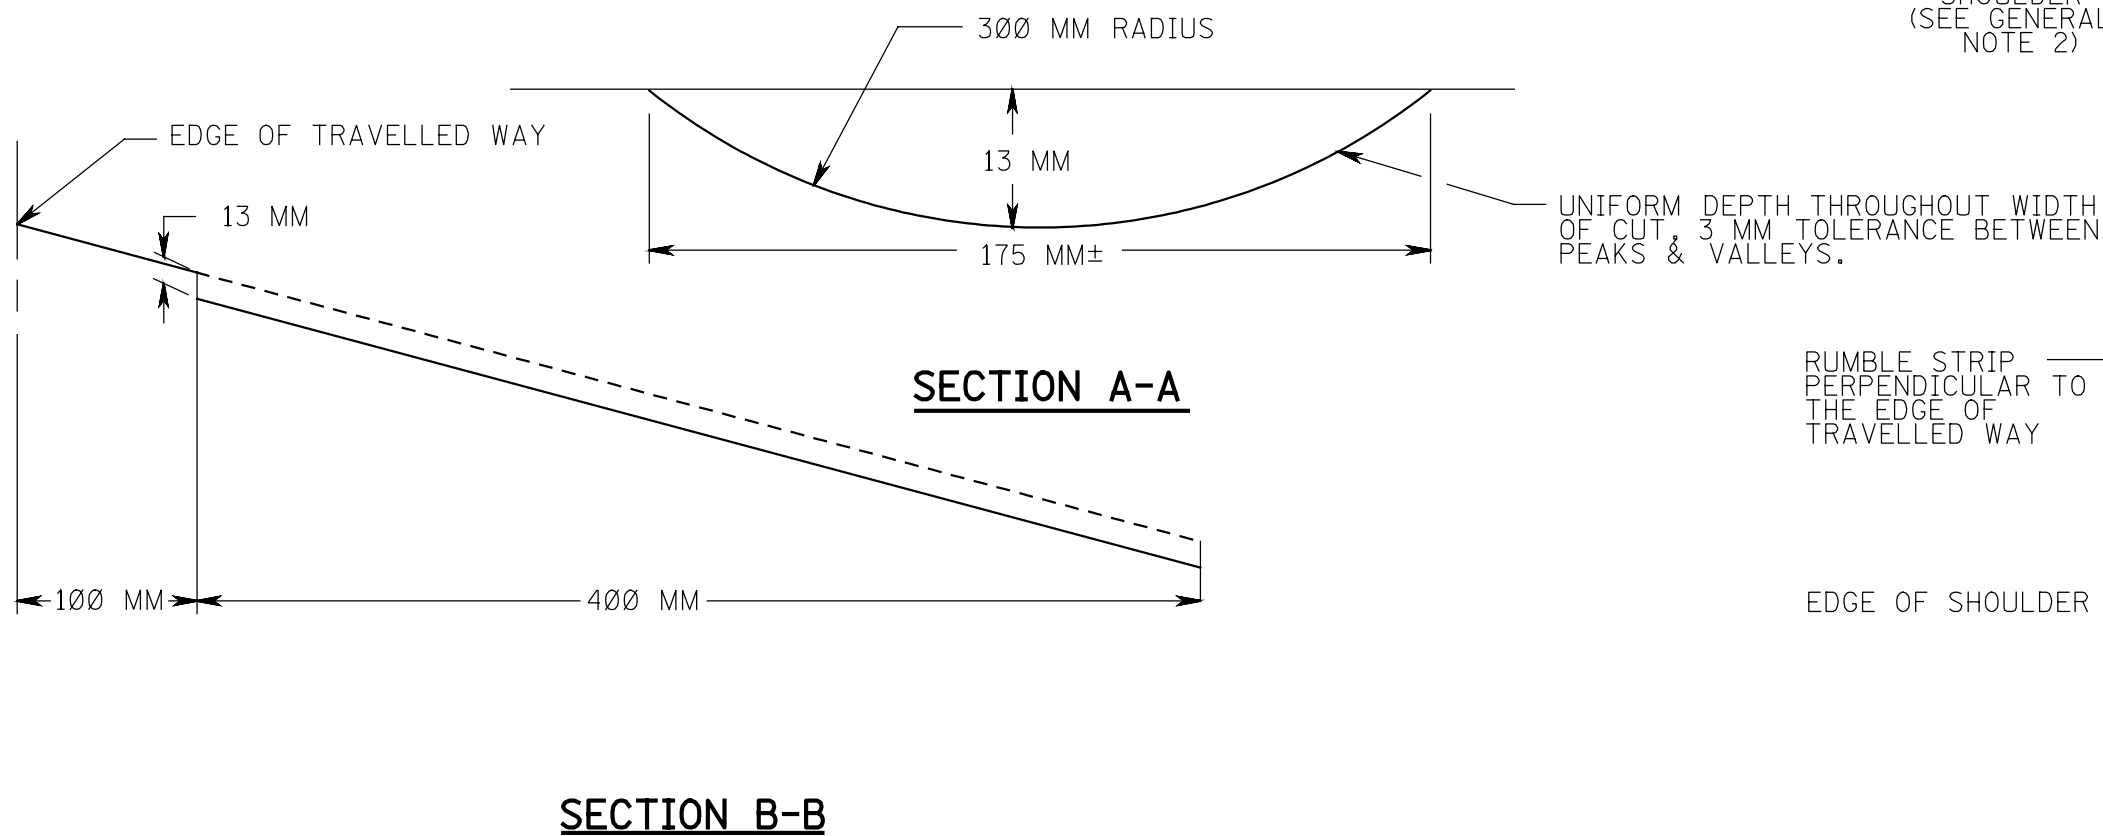

#### GENERAL NOTES:

1. THE MINIMUM LENGTH OF RUMBLE STRIPS MEASURED LONGITUDINALLY ALONG THE SHOULDER SHALL BE 30 METERS.
2. RUMBLE STRIPS SHALL BE CONSTRUCTED WITHIN 0.9 METERS OR WIDER INSIDE SHOULDER AND 2.4 METERS OR WIDER OUTSIDE SHOULDER.
3. RUMBLE STRIPS SHALL NOT BE CONSTRUCTED ACROSS BRIDGE DECKS.
4. RUMBLE STRIPS SHALL NOT BE CONSTRUCTED WITHIN 30 METERS BEFORE AND 30 METERS AFTER THE P.C. OF INTERSECTING ROADWAYS AND DRIVEWAYS.

### CONCRETE JOINT REMOVAL, MILLING AND RUMBLE STRIPS

HMA = HOT MIX ASPHALT  
N.T.S.

CD-202-1

NEW JERSEY DEPARTMENT OF TRANSPORTATION

### CONSTRUCTION DETAILS

NOTE: ALL DIMENSIONS SHOWN ON THIS SHEET ARE IN MILLIMETERS UNLESS OTHERWISE NOTED.

CD-202-1.4