NOTE;

UNDERDRAIN IS SHOWN PARALLEL TO THE EDGE OF PAVEMENT, BUT MAY BE USED IN OTHER LOCATIONS IF SO DIRECTED BY THE ENGINEER.

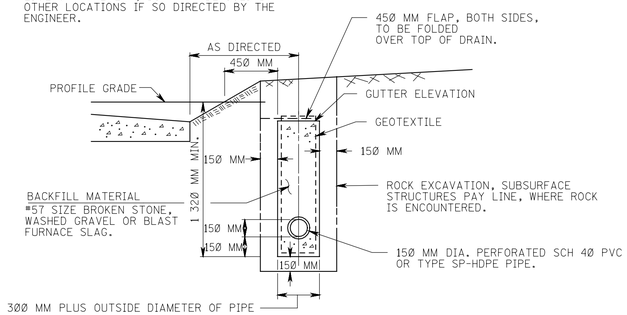

UNDERDRAIN TYPE F

CD-601-1.1



SECTION A-A

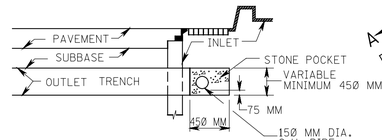

SECTION B-B

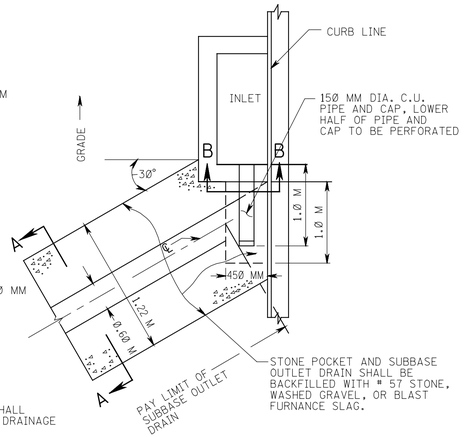

PLAN

NOTE;

DISCHARGED WATER SHALL IN NO CASE VIOLATE DRAINAGE RIGHTS.

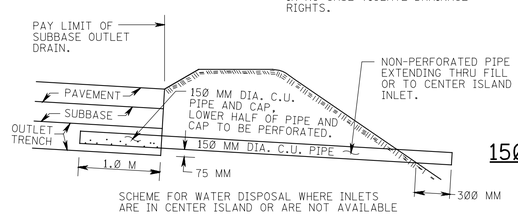

SCHEME FOR WATER DISPOSAL WHERE INLETS ARE IN CENTER ISLAND OR ARE NOT AVAILABLE

SUBBASE OUTLET DRAIN WITH 150 MM CORRUGATED UNDERDRAIN PIPE

CD-601-1.2

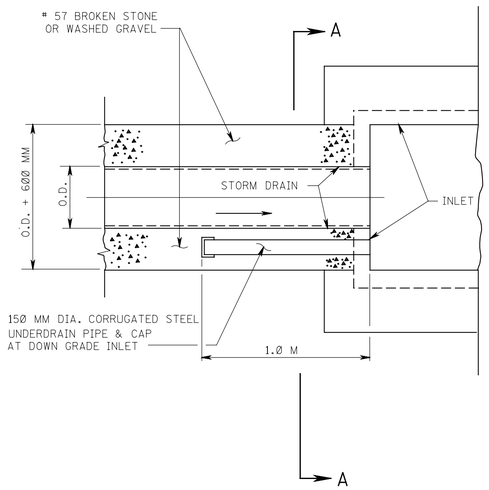

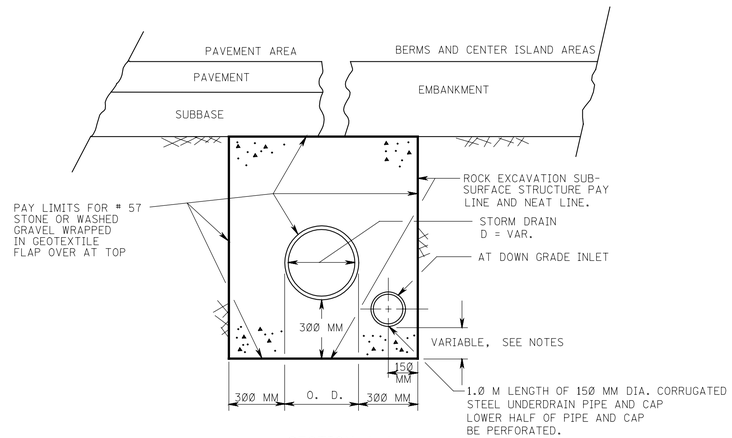

SECTION A-A

NOTE;

INVERT OF 150 MM DIA. STEEL PIPE TO BE 150 MM ABOVE BOTTOM OF INLET OR 150 MM ABOVE BOTTOM OF TRENCH WHICHEVER IS HIGHER.

COMBINED STORM DRAIN AND OUTLET TRENCH IN ROCK CUTS

CD-601-1.3

NOTE: ALL DIMENSIONS SHOWN ON THIS SHEET ARE IN MILLIMETERS UNLESS OTHERWISE NOTED.

UNDERDRAINS

N.T.S.

CD-601-1

NEW JERSEY DEPARTMENT OF TRANSPORTATION

CONSTRUCTION DETAILS

BDC04D-03 - CD-601-1.1 - POROUS PIPE REMOVED, CD-601.2 & 3 ARE REVISED
BDC01D-4 - ORIGINAL SHEET

pen table = -
scale = -
queue = -
date = -
file = -
ID = -