


**PRESTRESSED CONCRETE SLAB AND BOX
BEAMS, GROUTED KEY WAY DETAILS**

ISSUED: 2009

**PLATE
3.10-12**

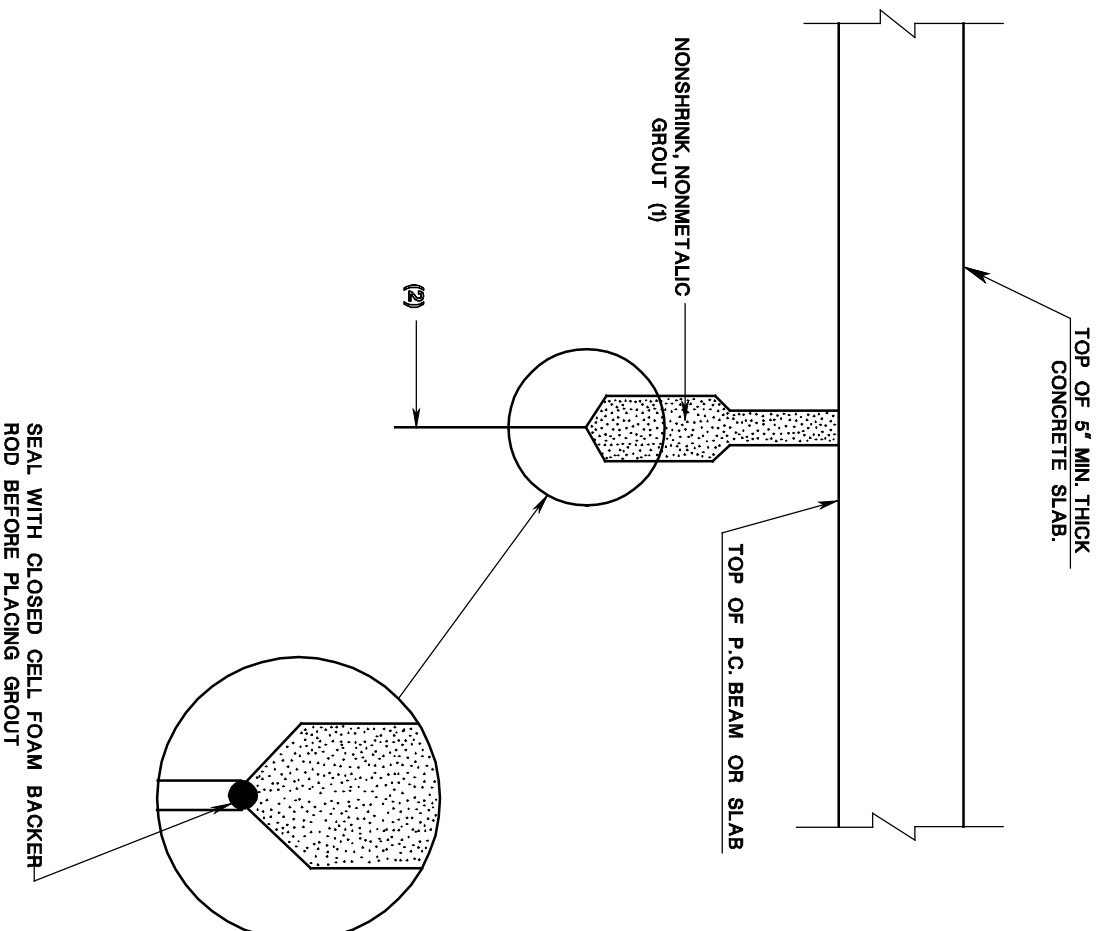

NOTES:

1. FILL SHEAR KEY WITH NONMETALLIC, NONSHRINK GROUT.
2. THE BOTTOM JOINT OPENING BETWEEN ADJACENT BOX BEAMS SHALL NOT EXCEED $\frac{1}{2}$ ".