


<p>PREFABRICATED MODULAR WALL (DOUBLEWAL)</p> <p>TYPICAL CUT SECTION</p>	<p>ISSUED: 2009</p>	<p>PLATE 3.4-9</p>
--	---------------------	------------------------

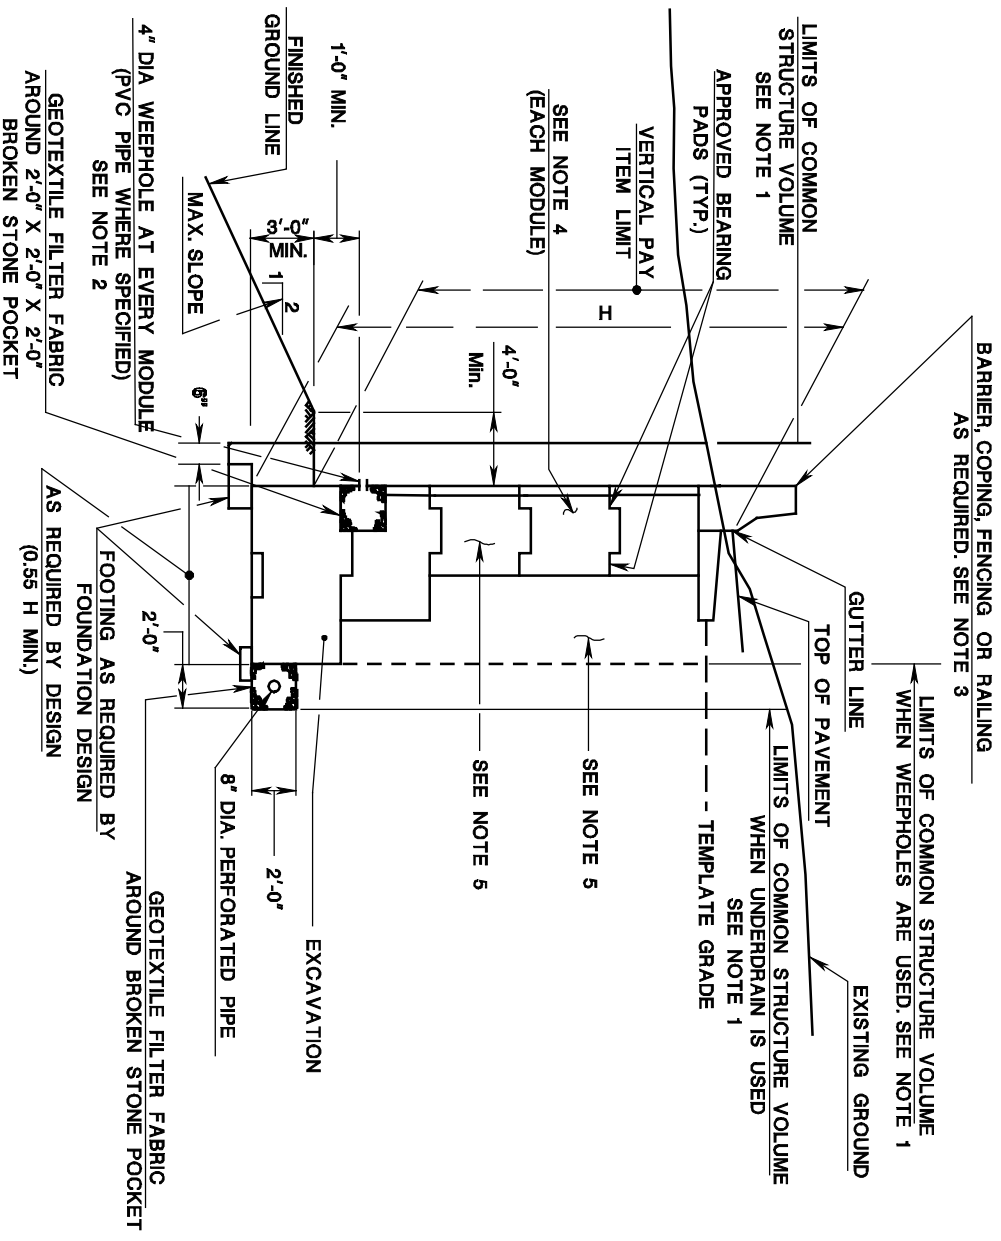

### TYPICAL SECTION (CUT)

#### PREFABRICATED MODULAR WALL

- (1) THE LIMIT OF COMMON STRUCTURE VOLUME BEHIND THE WALL SHALL BE GOVERNED BY THE NARROWEST LIMIT OF ALTERNATE WALL ALLOWED IN THE CONTRACT AT THAT LOCATION. THE DESIGNER SHALL CONTACT THE WALL MANUFACTURER TO DETERMINE THE WIDTH OF THE NEEDED CUT.
- (2) DRAINAGE REQUIREMENTS SHOULD BE ADDRESSED.
- (3) PAYMENT FOR THIS ITEM IS BASED ON PROJECT TO PROJECT BASIS.
- (4) FOR WALLS BUILT IN PARTIAL CUT AND FILL AREAS, THE COMMON STRUCTURE VOLUME LIMITS FOR EACH SITUATION SHALL BE COMBINED INTO ONE TYPICAL SECTION.
- (5) REFER TO THE NDOT STANDARD SPECIFICATIONS AND SECTION 17 OF THIS MANUAL FOR PERMISSIBLE BACKFILL MATERIALS AND REQUIREMENTS FOR THE PLACEMENT OF GEOTEXTILE FILTER FABRIC MATERIAL.