


Marcellus Monitoring: Small Streams



Alliance for Aquatic Resource Monitoring
Dickinson College
Carlisle, PA

ALLARM Background

Empower communities with scientific tools to monitor, protect, and restore PA streams.

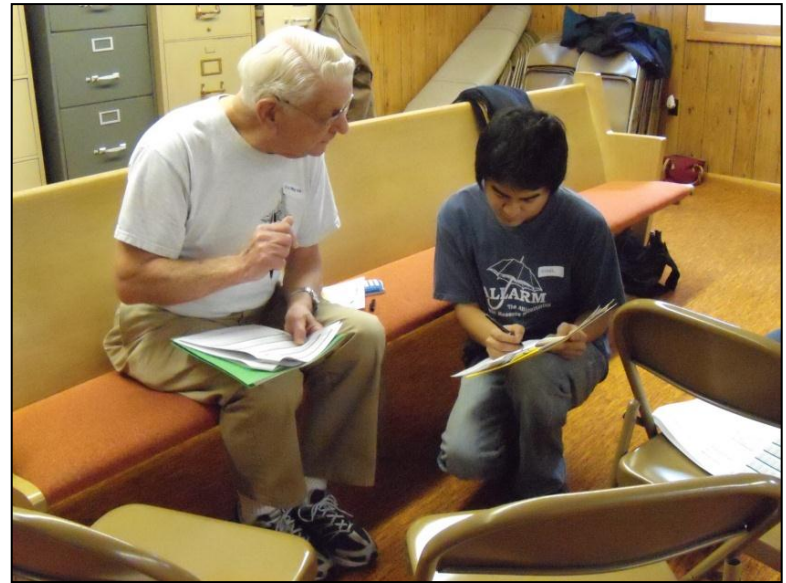

Educate. Engage. Empower.

Volunteer Monitoring

- Citizens involved in data collection
- US: 1890 – 2011



Citizen Stewards Water Quality Monitoring Program



PA Volunteer Stream Monitoring

Rich history – 1980s



Marcellus Monitoring

- A. Citizen surveillance
- B. Baseline monitoring
- C. Continuous monitoring



Great network of partners

Shale Basins in the US

EXHIBIT ES-1: UNITED STATES SHALE BASINS


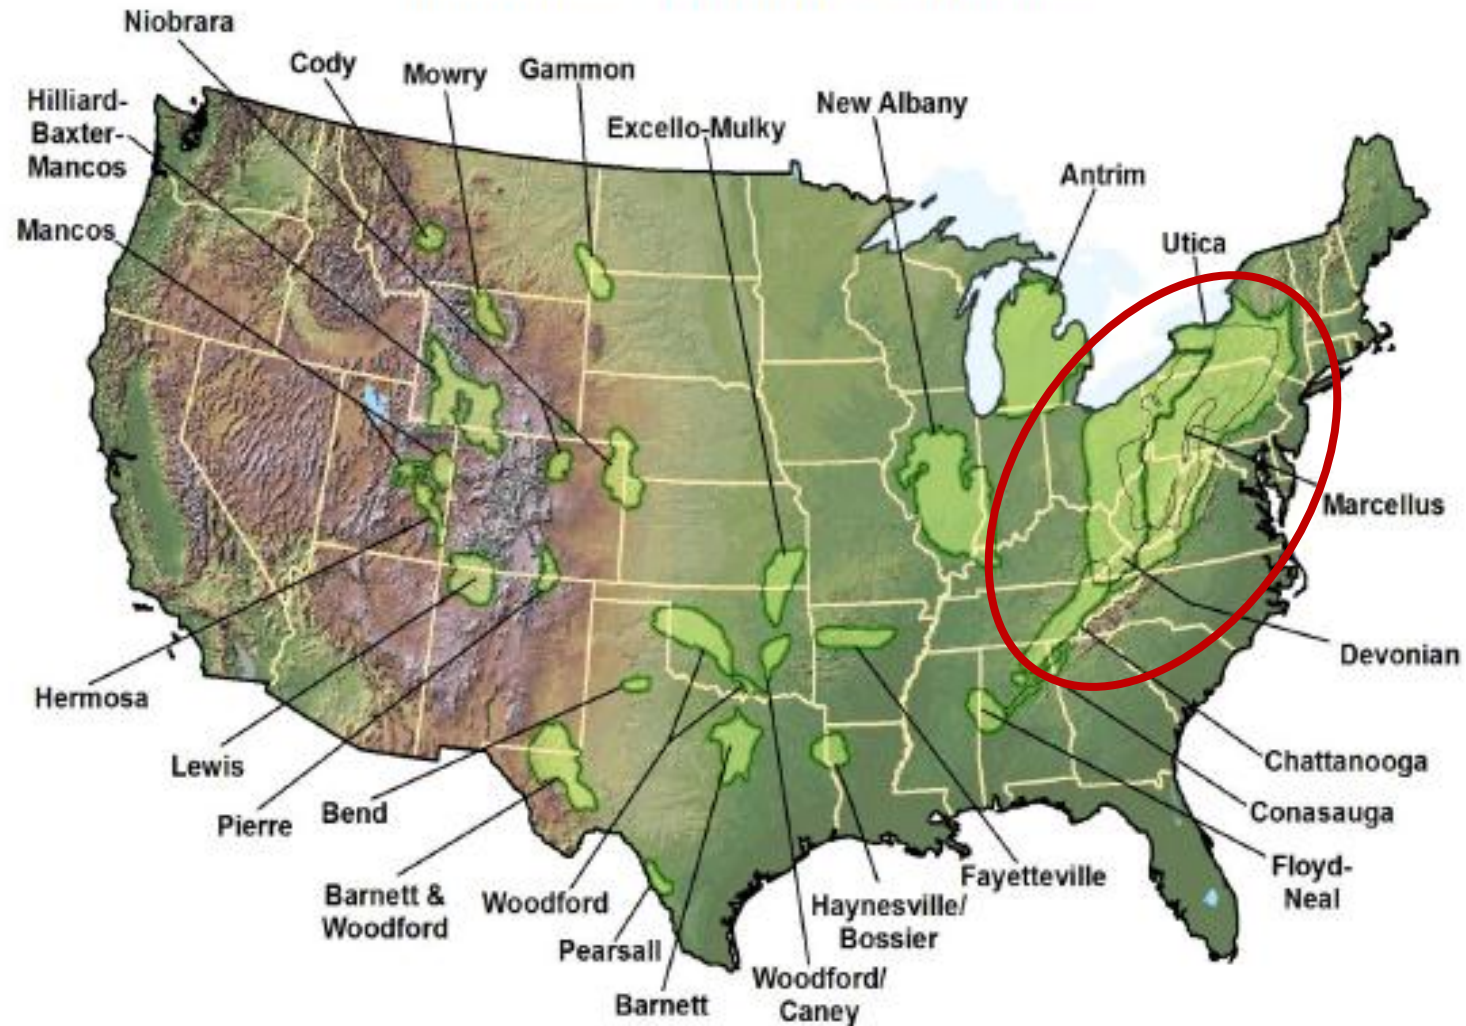


EXHIBIT 11: COMPARISON OF DATA FOR THE GAS SHALES IN THE UNITED STATES


Gas Shale Basin	Barnett	Fayetteville	Haynesville	Marcellus	Woodford	Antrim	New Albany
Estimated Basin Area, square miles	5,000	9,000	9,000	95,000	11,000	12,000	43,500
Depth, ft	6,500 - 8,500 ⁸²	1,000 - 7,000 ⁸³	10,500 - 13,500 ⁸⁴	4,000 - 8,500 ⁸⁵	6,000 - 11,000 ⁸⁶	600 - 2,200 ⁸⁷	500 - 2,000 ⁸⁸
Net Thickness, ft	100 - 600 ⁸⁹	20 - 200 ⁹⁰	200 ⁹¹ - 300 ⁹²	50 - 200 ⁹³	120 - 220 ⁹⁴	70 - 120 ⁹⁵	50 - 100 ⁹⁶
Depth to Base of Treatable Water [#] , ft	~1200	~500 ⁹⁷	~400	~850	~400	~300	~400
Rock Column Thickness between Top of Pay and Bottom of Treatable Water, ft	5,300 - 7,300	500 - 6,500	10,100 - 13,100	2,125 - 7650	5,600 - 10,600	300 - 1,900	100 - 1,600
Total Organic Carbon, %	4.5 ⁹⁸	4.0 - 9.8 ⁹⁹	0.5 - 4.0 ¹⁰⁰	3 - 12 ¹⁰¹	1 - 14 ¹⁰²	1 - 20 ¹⁰³	1 - 25 ¹⁰⁴
Total Porosity, %	4 - 5 ¹⁰⁵	2 - 8 ¹⁰⁶	8 - 9 ¹⁰⁷	10 ¹⁰⁸	3 - 9 ¹⁰⁹	9 ¹¹⁰	10 - 14 ¹¹¹
Gas Content, scf/ton	300 - 350 ¹¹²	60 - 220 ¹¹³	100 - 330 ¹¹⁴	60 - 100 ¹¹⁵	200 - 300 ¹¹⁶	40 - 100 ¹¹⁷	40 - 80 ¹¹⁸
Water Production, Barrels water/day	N/A	N/A	N/A	N/A	N/A	5 - 500 ¹¹⁹	5 - 500 ¹²⁰
Well spacing, acres	60 - 160 ¹²¹	80 - 160	40 - 560 ¹²²	40 - 160 ¹²³	640 ¹²⁴	40 - 160 ¹²⁵	80 ¹²⁶
Original Gas-In-Place, tcf ¹²⁷	327	52	717	1,500	23	76	160
Technically Recoverable Resources, tcf ¹²⁸	44	41.6	251	262	11.4	20	19.2

From: US Dept of Energy, *Modern Shale Gas Development in the US: A Primer*, 2009

Hydraulic Fracturing ("Fracking")

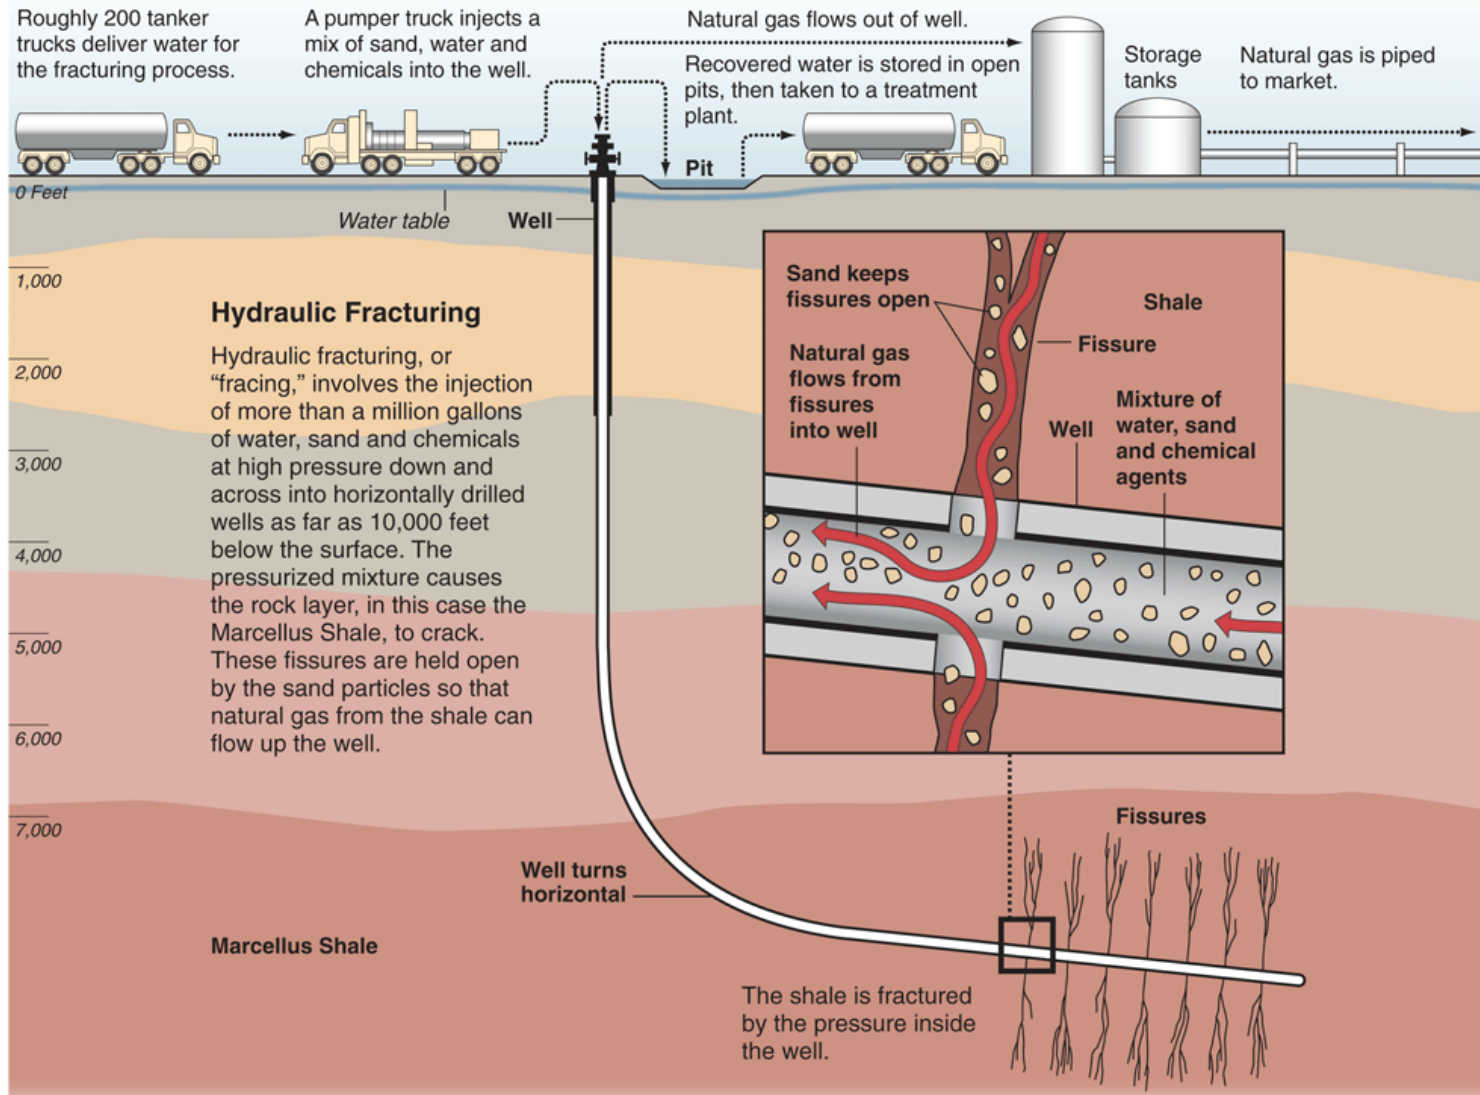

Marcellus Shale Drilling Permits

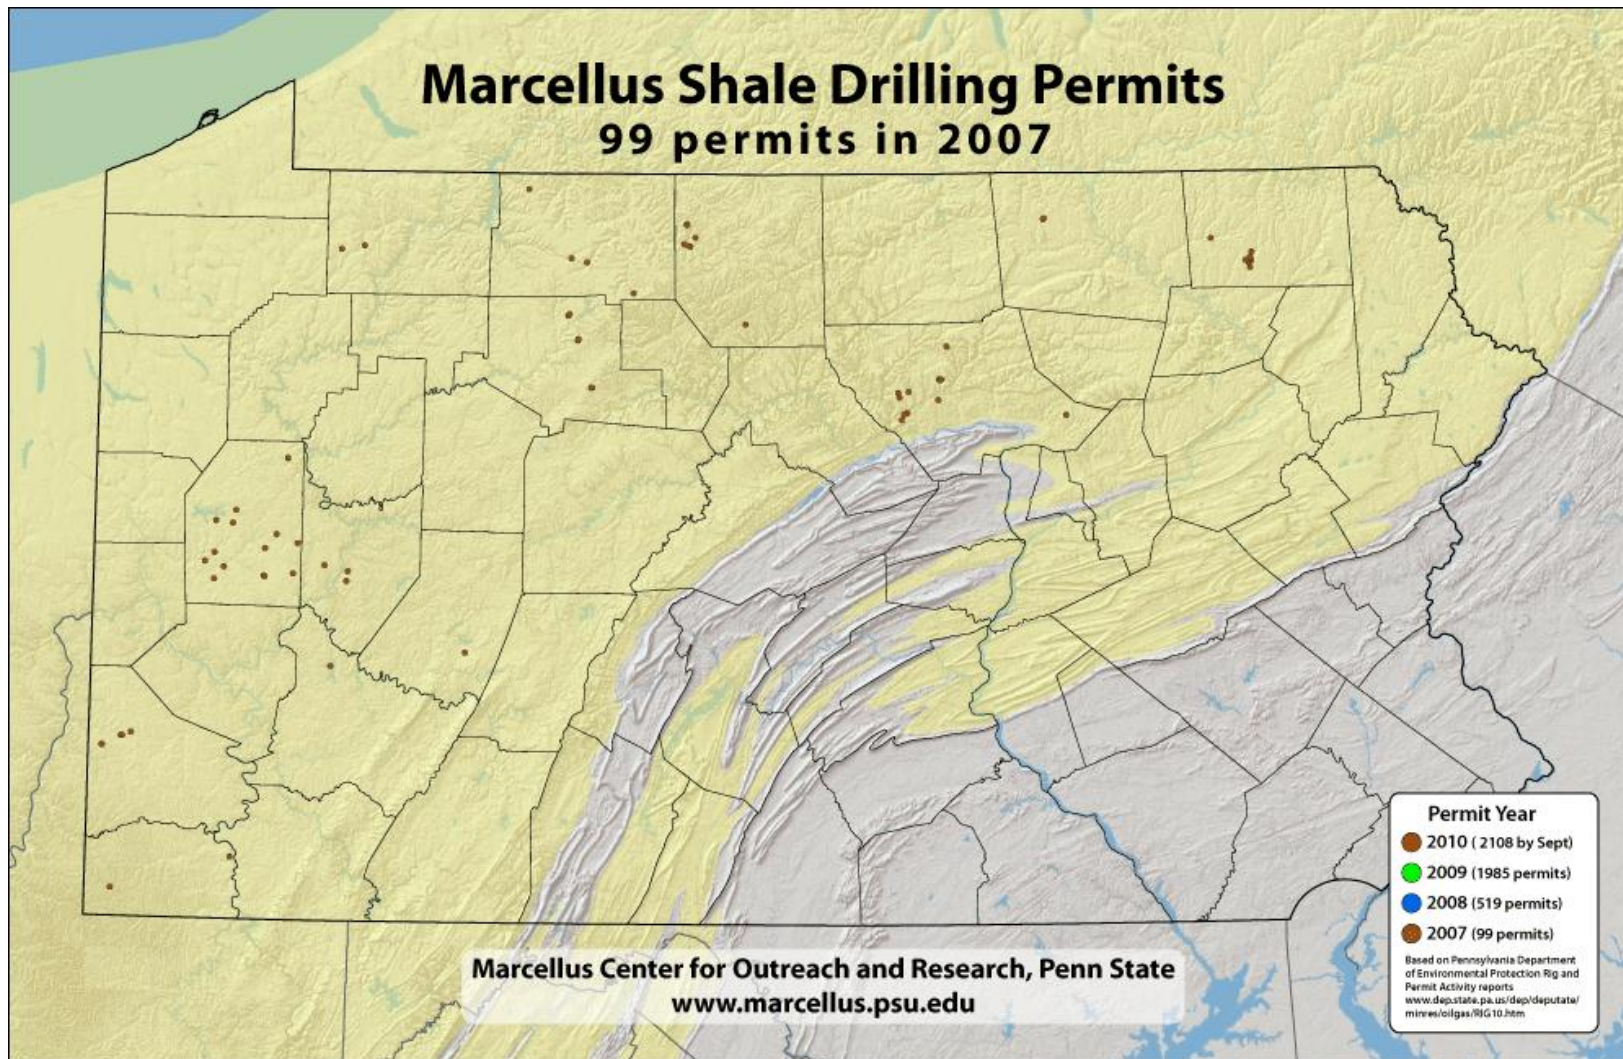


Current Gas Drilling

Department of Environmental Protection Bureau of Oil and Gas Management Wells Drilled

2010 January-December Wells Drilled - 2,755

Non Marcellus Shale - 1,369 Wells Drilled

Marcellus Shale - 1,386 Wells Drilled

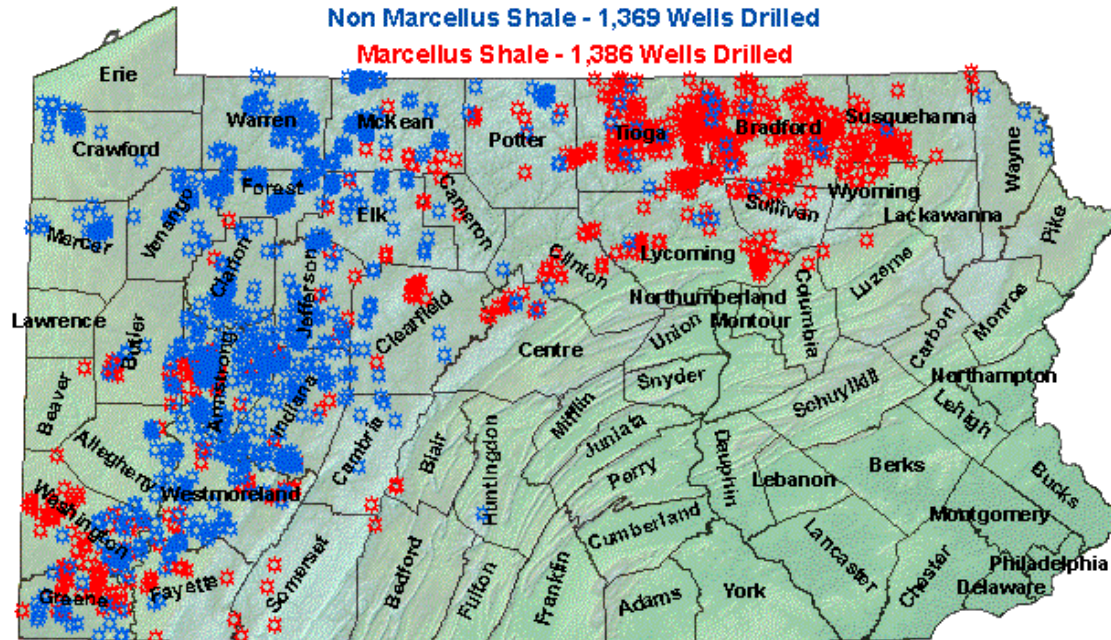

As Reported by Operators

Updated 01/05/2011

Marcellus Shale Drilling Stats:

- 2005–2010: 6,082 Marcellus Shale permits issued (2,596 wells drilled)
- 2008: 5% of all oil/gas wells drilled were in Marcellus Shale Formation (195/4,192)
- 2009: 30% of all oil/gas wells drilled were in Marcellus Shale Formation (768/2,543)
- 2010: 50% of all oil/gas wells drilled were in Marcellus Shale Formation (1,386/2,755)

Drilling Sites




Marcellus Shale Drilling Site Stats:

- Drilling pads typically 3-5 acres, each pad containing 5-6 horizontal wells
- 2-9 million gallons of water used per well (depending on depth and number of times fracked)
- 200-1400 truck trips to supply water per well
- Drilling pads must be >200 feet from structures, >100 feet from streams and wetlands

Volunteer Monitoring

- Feasibility
- Affordability
- Scientifically robust

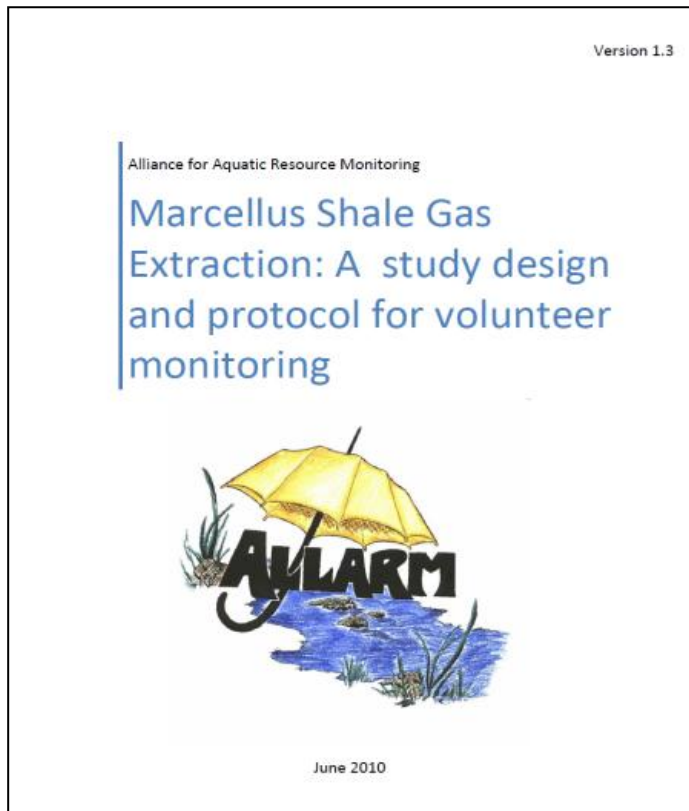

www.dickinson.edu/ALLARM

Why Are You Monitoring?

1. Early detection and prevention of contamination
2. Document stream quality – long term impacts
3. Community education



What Will You Monitor?

1. Chemical Monitoring:

Indicator and signature chemicals

Parameter	Median concentrations in flowback samples (mg/L)	PA water quality criteria (mg/L)	PA drinking water criteria (mg/L)	Potential health & environmental effects
Total Dissolved Solids	93,200	500	500	Variable; includes many chemicals
Barium	661	10	2	Increase in blood pressure
Strontium	821	0.050	none	Musculoskeletal toxicant

2. Visual Assessment:

Land disturbances
Spills and discharges
Water withdrawals
Gas migration/leakages




<http://www.rocketcourier.com/pictures/rivergas.jpg>

3. Surrogate Flow Monitoring:

Relationship to TDS



Flowback Water Concentrations

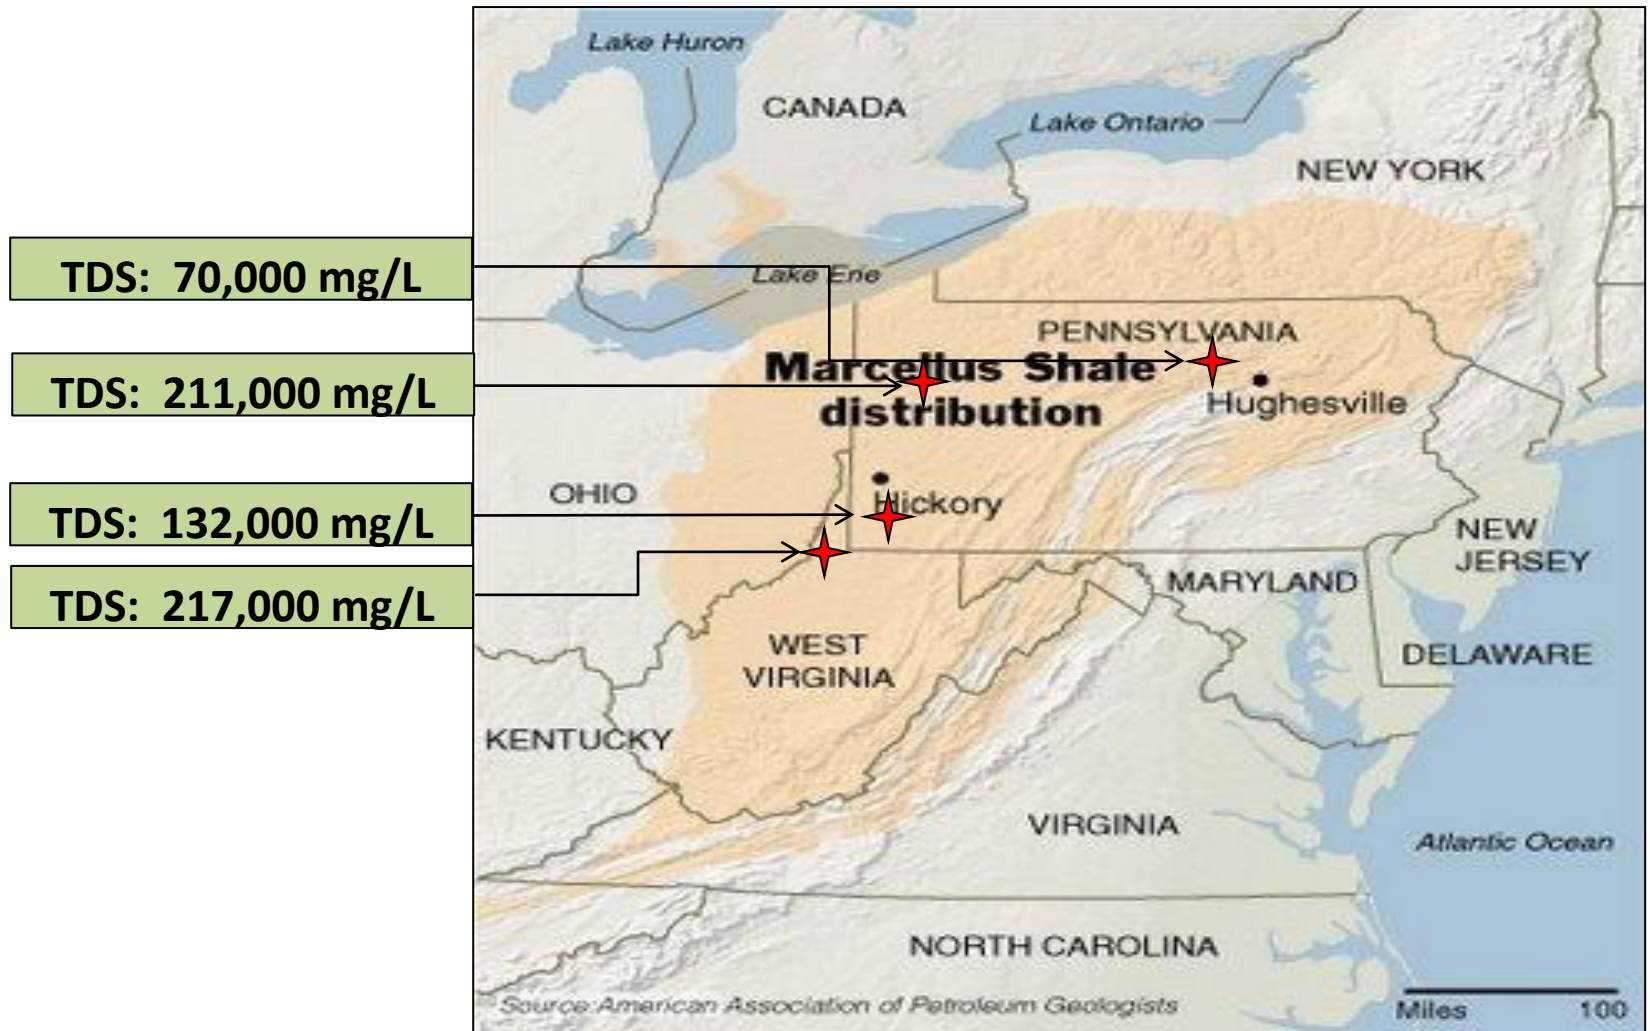

Source: Amy Bergdale, USEPA

Conductivity and Total Dissolved Solids

- Conductivity measures the ability of water to pass an electrical current
- Total Dissolved Solids (TDS) measures the amount of ions dissolved in the water
(PA standard – 500 mg/L)



Voltage is applied between two probes to measure conductivity in microSiemens/centimeter ($\mu\text{S}/\text{cm}$)

TDS conversion
ratio factor

TDS value (mg/L)

Meter Trials



Dickinson students help test conductivity/TDS meters to determine which meter is most accurate, precise, and easy to use.

Conductivity/Total Dissolved Solids Meter Testing

Thank you for participating in this meter testing session sponsored by the Alliance for Aquatic Resource Monitoring (ALLARM). Please answer the questions on page 1 about each water quality meter. Additional questions are found on page 2 – please provide as much feedback as possible!

Meter A: LaMotte Tracer PocketTester

Results	Solution A	Solution B	Solution C
Conductivity	_____	_____	_____
TDS	_____	_____	_____

Did the reading stabilize? YES NO

How difficult was it to calibrate the meter?

[1 = very difficult; 2 = difficult; 3 = medium 4 = easy; 5 = very easy]

1 2 3 4 5

How difficult was it to understand the directions?

[1 = very difficult; 2 = difficult; 3 = medium 4 = easy; 5 = very easy]

1 2 3 4 5

Meter B: Oakton Multi-Parameter PCSTestr 35

Results	Solution A	Solution B	Solution C
Conductivity	_____	_____	_____
TDS	_____	_____	_____

Did the reading stabilize? YES NO

How difficult was it to calibrate the meter?

[1 = very difficult; 2 = difficult; 3 = medium 4 = easy; 5 = very easy]

1 2 3 4 5


How difficult was it to understand the directions?

[1 = very difficult; 2 = difficult; 3 = medium 4 = easy; 5 = very easy]

1 2 3 4 5



Barium and Strontium

- Naturally-occurring metals found deep underground
- Indicate contamination from Marcellus Shale activities (signature chemicals)

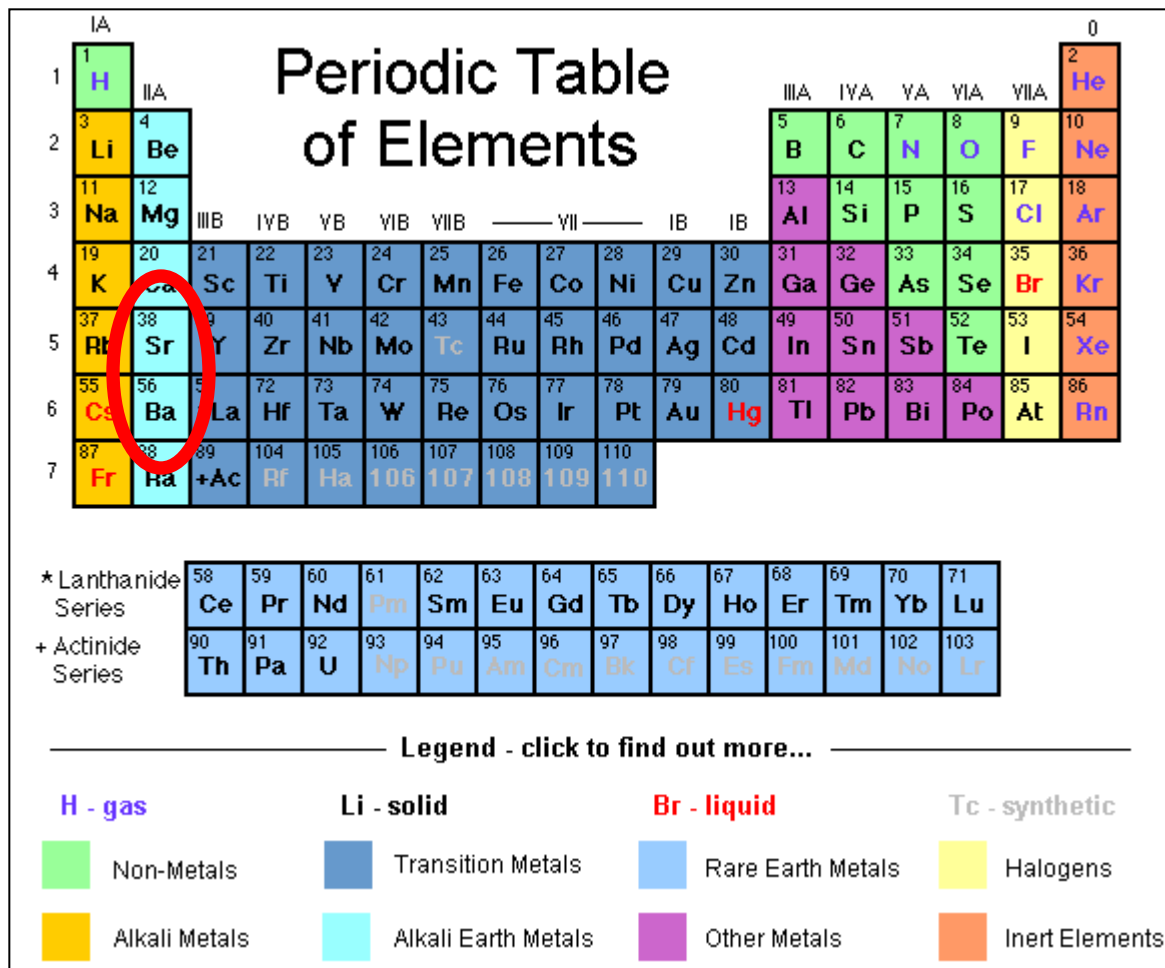

Surrogate Flow Monitoring

Cross-sectional area – understand relationship between amount of water in stream and TDS

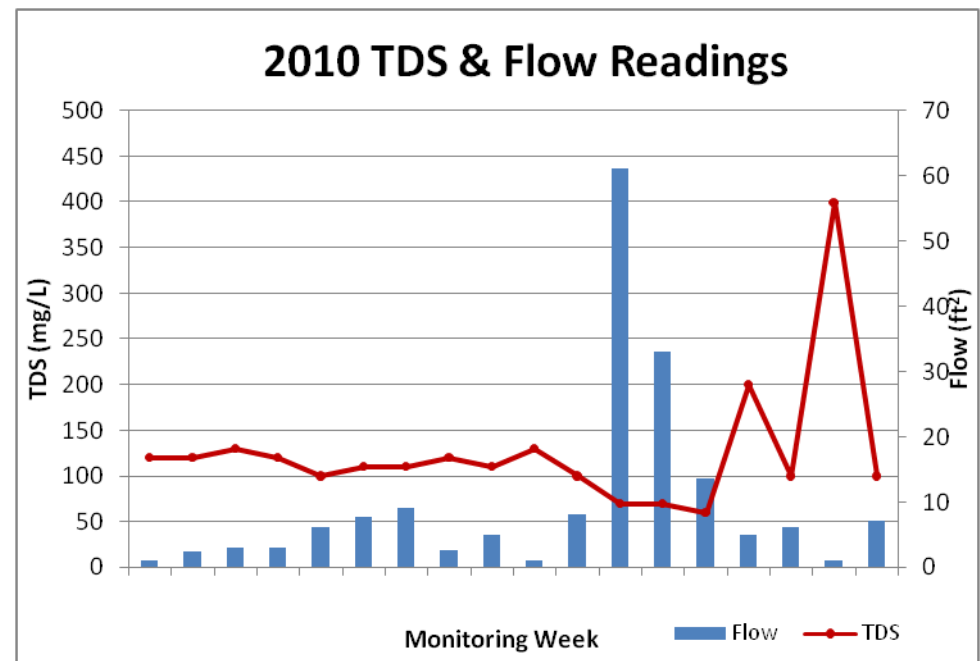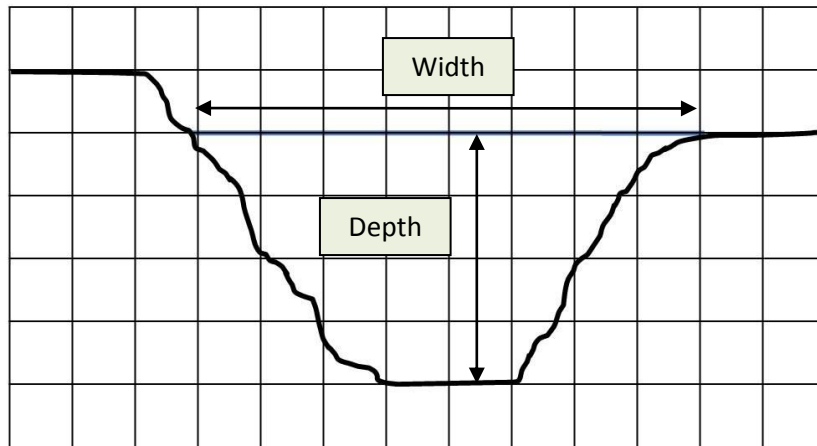

Visual Assessment

- Earth Disturbances
- Gas Migration/Leakages
- Spills and Discharges



Marcellus Shale Well Sites in Dimock, PA; 2010

Earth Disturbances: Drill Pad, Storage Pond, & Staging Areas



Outlets of sediment control structures are NOT stabilized



Outlets of sediment control structures are stabilized

Spills & Discharges

Photos courtesy of Delaware Riverkeeper Network



Drilling fluid spill at Cabot site
Dimock, PA
September 2009



Where Will You Monitor?

Considerations: How will volunteers determine where drilling is occurring?



Volunteers have a wealth of information about their local surroundings

Determining Well Locations

Step 1:

Find where drilling permits have been issued (lat/long)


- eNOTICE/eFacts/eMap PA
- DEP reports



Step 2:

Find issued drilling permit locations on map

- Google Maps
- Topographic map



Step 3:


Choose monitoring site based on important features

- Well locations
- Stream access



Data Use: Decision Trees

CHEMICAL MONITORING DECISION TREE

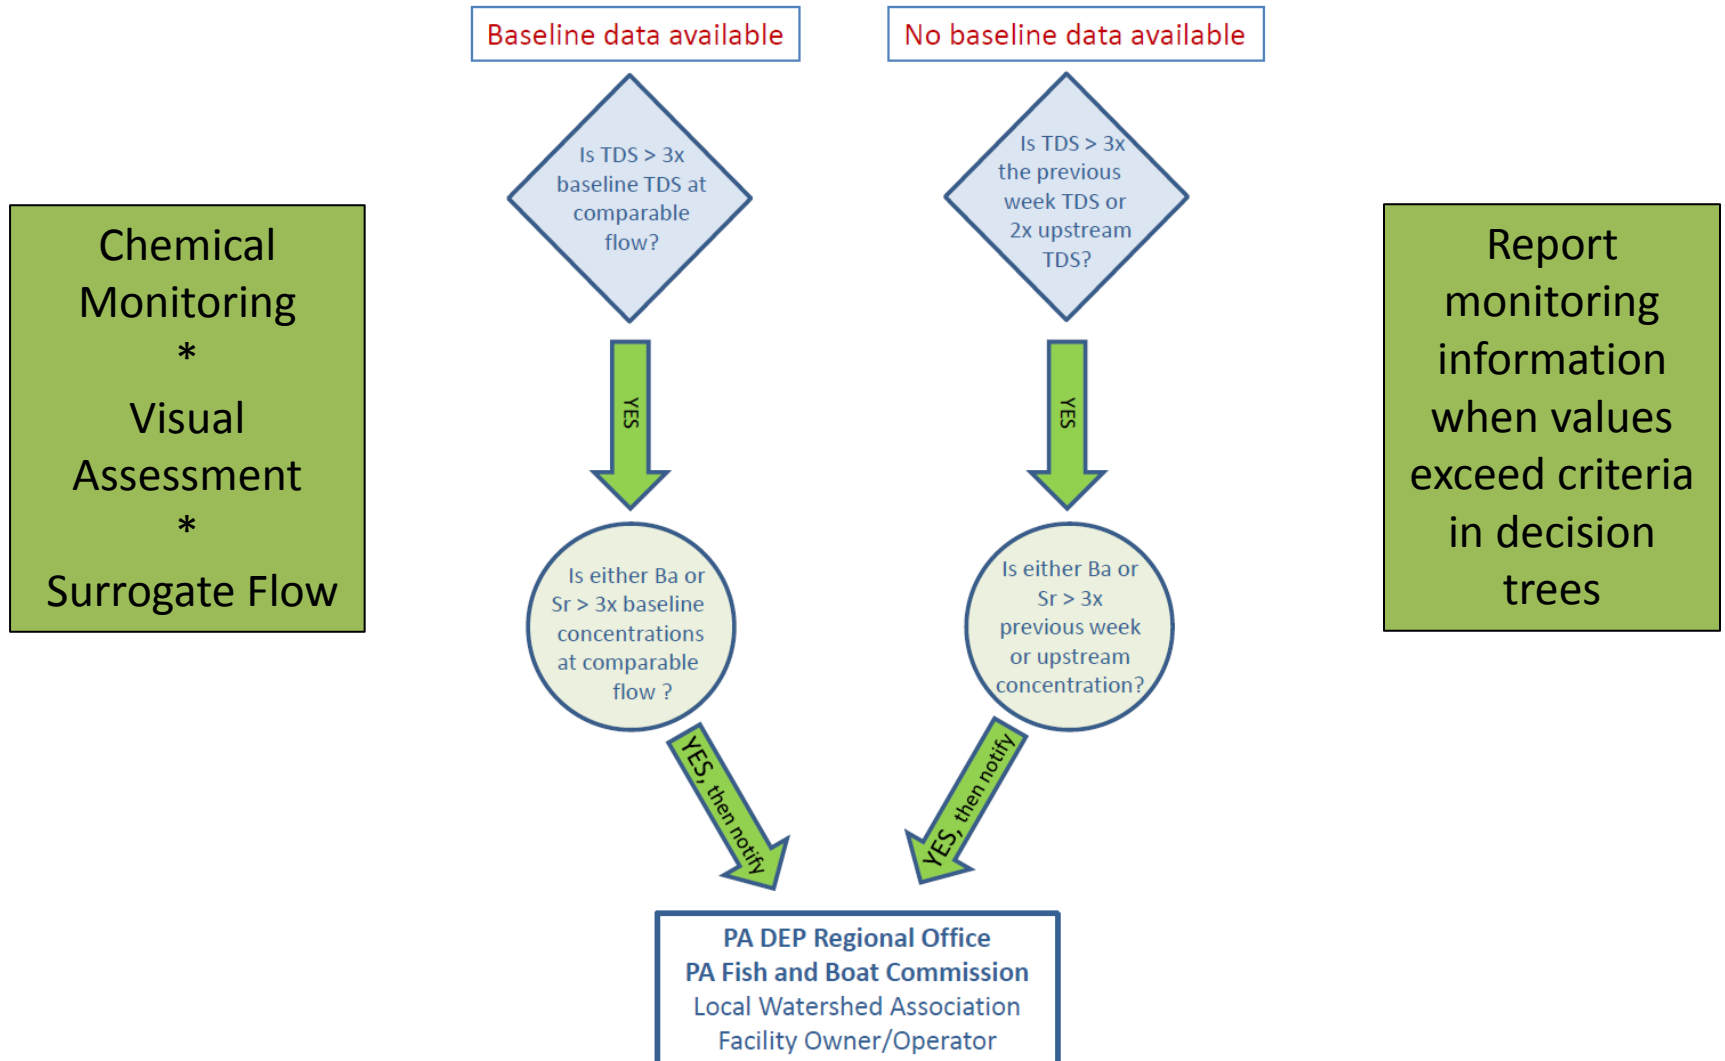

Quality Assurance/Quality Control

Considerations: What is feasible for volunteers?




Standard QA/QC Practices:

- Training requirements
- Care/calibration of equipment
- Replicates
- Documentation of procedures
- Split sample analysis

Data Management

Considerations: What tools and methods are available to volunteers?

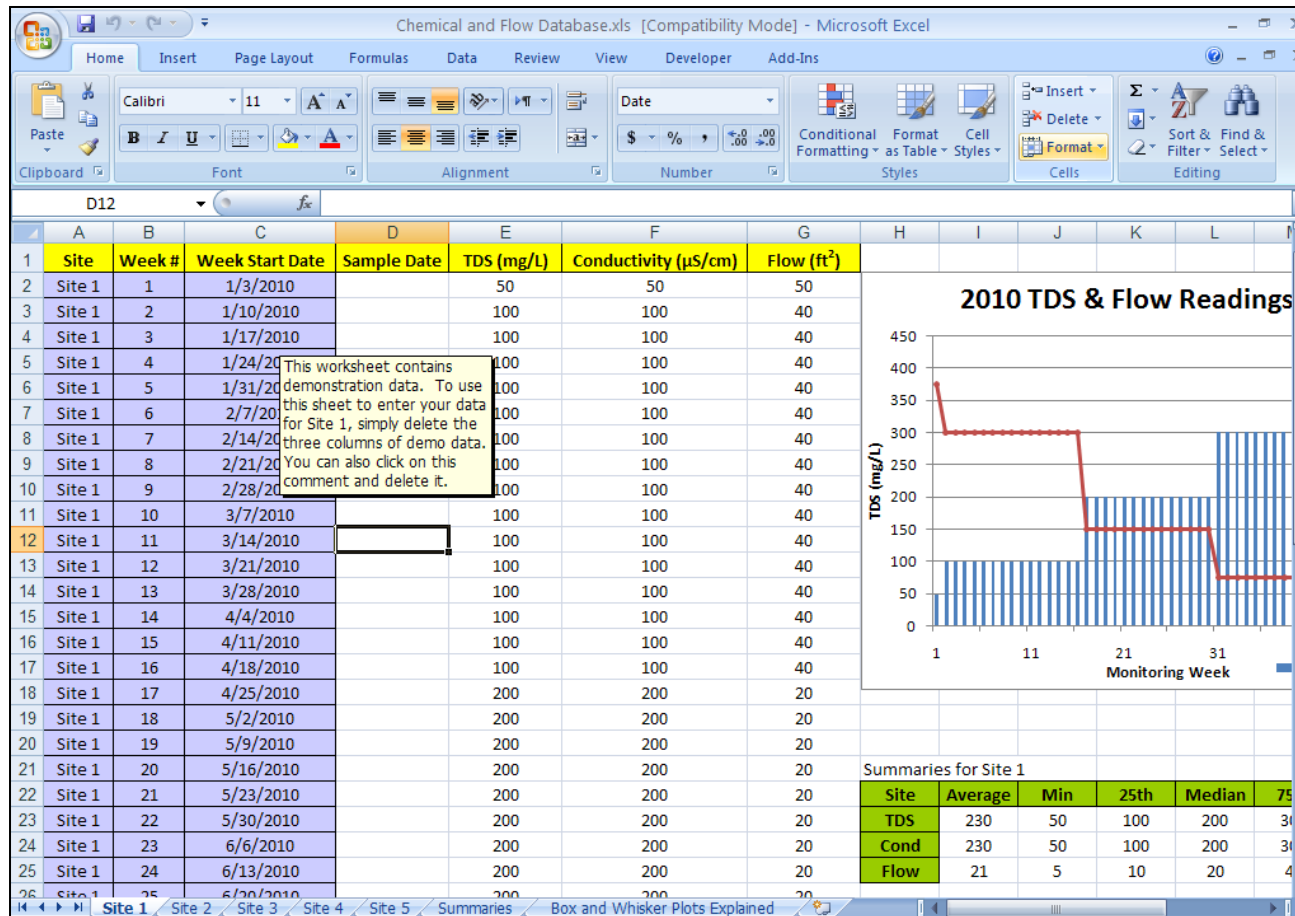

ALLARM created easy to use templates for volunteers to store their chemical, surrogate flow, and visual assessment data.

Building a Monitoring Force

- 600 people trained since the start of 2010
- ALLARM, DRN, PACTU, & Waterdogs



Questions?

Alliance for Aquatic Resource Monitoring (ALLARM)

Dickinson College

P.O. Box 1773

Carlisle, PA 17013

717.245.1565

allarm@dickinson.edu

www.dickinson.edu/allarm

[Marcellus Shale Monitoring Manual](#)