

NEW JERSEY SIGN HANDBOOK

**NEW JERSEY DEPARTMENT OF TRANSPORTATION
DIVISION OF TRAFFIC ENGINEERING**

**REVISION DATE: NOVEMBER, 2025
5TH EDITION**

NEW JERSEY SIGN HANDBOOK

GENERAL NOTES:

THE SIGNS WITHIN THE MANUAL ON UNIFORMED TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS (MUTCD), WHICH HAS BEEN ADOPTED BY THE FEDERAL HIGHWAY ADMINISTRATOR (FHWA), ARE THE STANDARD SIGNS USED BY THE NEW JERSEY DEPARTMENT OF TRANSPORTATION (NJDOT) PER NEW JERSEY ADMINISTRATIVE CODE (NJAC) TITLE 16 CHAPTER 27, NJAC TITLE 39 SECTION 39:4-120, AND NJAC TITLE 39 SECTION 39:4-183.27.

THE SIGNS WITHIN THIS HANDBOOK HAVE BEEN DEVELOPED BASED ON CASE-BY-CASE STUDIES AND ENGINEERING JUDGEMENT FOR FIELD CONDITIONS THAT HAVE BEEN ENCOUNTERED WITHIN THE STATE OF NEW JERSEY AND THERE ARE NO SUITABLE SIGNS WITHIN THE MUTCD.

THE SIGNS IN THIS HANDBOOK ARE A COLLECTION BASED ON THESE RECURRING FIELD CONDITIONS.

THE SIGNS IN THIS HANDBOOK HAVE BEEN NUMBERED TO COINCIDE WITH THE MUTCD WHENEVER POSSIBLE.

THE SIGNS WITHIN THIS HANDBOOK ARE PICTORIAL REPRESENTATIONS OF THE SIGN MESSAGES. THIS HANDBOOK DOES NOT PROVIDE SIGN CONSTRUCTION SPECIFICATIONS; THE ARROWS, BORDERS, CORNER RADII, FONTS, SPACING, SYMBOLS, ETC. SPECIFICATIONS FOLLOW THE SPECIFICATIONS OF THE FHWA STANDARD SIGNS AND MARKINGS.

THIS HANDBOOK PROVIDES THE SIGN MESSAGES, SIGN DIMENSIONS AND FONT SIZE FOR THE (NJ) SIGNS. THE SPACINGS OF THE ARROWS, FONT, SYMBOLS, ETC. MAY HAVE BEEN REDUCED OR INCREASED IN ORDER TO FIT THE CLOSEST NOMINAL SIGN BLANKS THAT ARE CURRENTLY AVAILABLE TO PREVENT CREATING SPECIALLY SIZED SIGNS.

ANY SIGNS THAT HAVE BEEN REMOVED FROM THIS HANDBOOK ARE NO LONGER BEING USED BY THE NJDOT. SEE THE PREVIOUS EDITIONS OF THIS HANDBOOK AS A REFERENCE FOR THE SIGNS THAT HAVE BEEN REMOVED.

QUESTIONS AND COMMENTS MAY BE SENT TO:


NEW JERSEY DEPARTMENT OF TRANSPORTATION
DIVISION OF TRAFFIC ENGINEERING
1035 PARKWAY AVENUE
P.O. BOX 600
TRENTON, NJ 08625-0600

NJDOT ARROW SIZES FOR NEW JERSEY SIGNS


VERTICAL AND HORIZONTAL ARROWS

$\phi = 0^\circ \text{ or } 90^\circ$ (W x L)	$\phi = 30^\circ$ (A x B)	$\phi = 45^\circ$ (A x B)	$\phi = 60^\circ$ (A x B)
2" x 3"	3" x 2"	2.5" x 2.75"	2" x 3"
2.5" x 3.5"	3.75" x 2.5"	3" x 3.25"	2.5" x 3.75"
3" x 4.5"	4.5" x 2.5"	3.5" x 3.5"	2.75" x 2.75"
4" x 9.5"	9" x 5.5"	7.5" x 7.5"	5.5" x 9"
4" x 18"	16" x 10.25"	13" x 13.75"	10.25" x 16"
5" x 9.5"	7" x 4.75"	7.5" x 7.5"	4.75" x 7"
5" x 22.5"	20.25" x 13"	17.25" x 17"	13" x 20.25"
6" x 9.5"	9" x 6"	7.5" x 7.5"	6" x 9"
6" x 22"	20" x 13.25"	16.5" x 16.5"	13.25" x 20"
7" x 9.5"	9" x 6.5"	7.75" x 8"	6.5" x 9"
7" x 22"	20" x 13.5"	17.25" x 16.75"	13.5" x 20"
8" x 15.5"	14.5" x 9.25"	12.25" x 12.25"	9.25" x 14.5"
8" x 25.5"	23.5" x 16"	20.25" x 19.5"	16" x 23.5"
10" x 14"	13" x 9.5"	11.25" x 11.25"	9.5" x 13"
12" x 16"	15" x 11.5"	13" x 13"	11.5" x 15"

SKEWED ARROWS

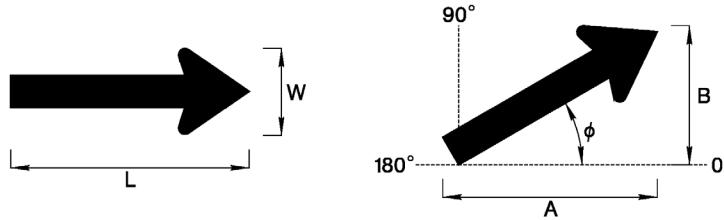

NOTE: This table expresses arrow size in two ways. The first approach uses the length and width (see the above left diagram). These dimensions are shown in the first column above. The second approach takes into account the skew angle from horizontal and dimensions the rectangle surrounding the arrow. The diagram (see the above right diagram) shows how these dimensions would be derived. These dimensions are shown in the second, third and fourth columns. Measurements for arrows shown in this handbook are referenced to the first (W x L) approach, but can be referenced to the other approach by reading across the table to the appropriate skew angle.

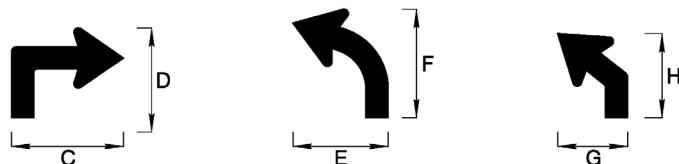

LETTER SIZE	C	D	E	F	G	H
4"	8"	5.5"	7.5"	6"	6"	7.5"
5"	9.5"	7"	9"	7.25"	-	-
6"	11.5"	8"	10.5"	7.25"	8.5"	11"
7"	11"	9"	11"	8"	-	-
8"	13.75"	11.5"	-	-	8.5"	10.5"
8" LONG	13.75"	22.25"	-	-	-	-


REGULATORY SIGNS

The R(NJ)3-11, R(NJ)3-1K, and R(NJ)3-21 signs should be installed in locations where all vehicles exceeding a certain weight or length are prohibited from making right or left turns by a NJ Traffic Regulation. For unconditional restrictions, the R3-1 and R3-2 signs should be used. The prohibition will be specified by NJ Traffic Regulations.

The R(NJ)3-1J, and R(NJ)3-2D signs should be installed in locations where trucks exceeding a certain weight or length are prohibited from making right or left turns by a NJ Traffic Regulation. For trucks over 4 tons, the R3-1d sign should be used. The prohibition will be specified by NJ Traffic Regulations.

DESIGN VEHICLE TO BE PROHIBITED	LENGTH TO POST
WB-40	45 FT
WB-50	55 FT
WB-62	65 FT
WB-65	70 FT

NOTE: TO BE USED ON R(NJ)3-1J, R(NJ)3-1K, R(NJ)3-2J, R(NJ)3-2K, R(NJ)3-4J, R(NJ)3-4K, R(NJ)3-18J & R(NJ)3-18K

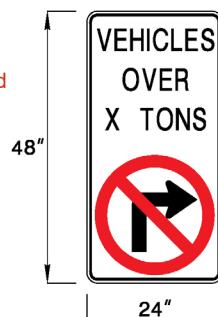


LETTERS
* 4" C
4" C
4" C

R(NJ)3-11

COLORS:


TEXT - BLACK
ARROW - BLACK
SYMBOL - RED
BACKGROUND - WHITE

* REDUCE SPACING TO FIT PANEL WIDTH.

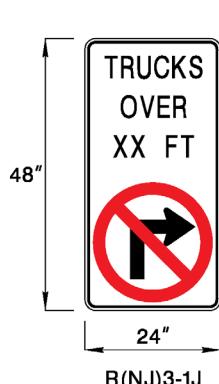

LETTERS
4" C
4" C
4" C

R(NJ)3-1J




LETTERS
* 4" C
4" C
4" C

R(NJ)3-1K

COLORS:


TEXT - BLACK
ARROW - BLACK
SYMBOL - RED
BACKGROUND - WHITE

* REDUCE SPACING TO FIT PANEL WIDTH.



LETTERS
4" C
4" C
4" C

R(NJ)3-2D



LETTERS
* 4" C
4" C
4" C

R(NJ)3-21

COLORS:

TEXT - BLACK
ARROW - BLACK
SYMBOL - RED
BACKGROUND - WHITE

* REDUCE SPACING TO FIT PANEL WIDTH.


The R(NJ)3-2J, R(NJ)3-4D, and R(NJ)3-4J signs should be installed in locations where trucks exceeding a certain weight or length are prohibited from making left or u-turns by a NJ Traffic Regulation. For unconditional restrictions, the R3-2 and R3-4 signs should be used. The prohibition will be specified by NJ Traffic Regulations.



R(NJ)3-2J

LETTERS

4" C
4" C
4" C



R(NJ)3-2K

LETTERS

* 4" C
4" C
4" C

COLORS:
TEXT - BLACK
ARROW - BLACK
SYMBOL - RED
BACKGROUND - WHITE

COLORS:
TEXT - BLACK
ARROW - BLACK
SYMBOL - RED
BACKGROUND - WHITE


* REDUCE SPACING TO FIT PANEL WIDTH.



R(NJ)3-4D

LETTERS

4" C
4" C
4" C



R(NJ)3-4I


LETTERS

* 4" C
4" C
4" C

COLORS:
TEXT - BLACK
ARROW - BLACK
SYMBOL - RED
BACKGROUND - WHITE

COLORS:
TEXT - BLACK
ARROW - BLACK
SYMBOL - RED
BACKGROUND - WHITE


* REDUCE SPACING TO FIT PANEL WIDTH.

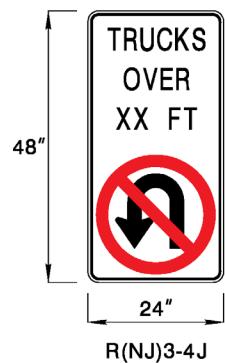

R(NJ)3-4J

LETTERS

4" C
4" C
4" C



R(NJ)3-4K

LETTERS


* 4" C
4" C
4" C

COLORS:
TEXT - BLACK
ARROW - BLACK
SYMBOL - RED
BACKGROUND - WHITE

COLORS:
TEXT - BLACK
ARROW - BLACK
SYMBOL - RED
BACKGROUND - WHITE

* REDUCE SPACING TO FIT PANEL WIDTH.

The signs in the R(NJ)3-8 series serve as ready to use custom signs for the most common configurations to be selected based on the specific number of lanes and their permitted movements at NJ intersections. The MUTCD Intersection Lane Control Signs (R3-5 through R3-8) should be used for lane configurations that match those signs.

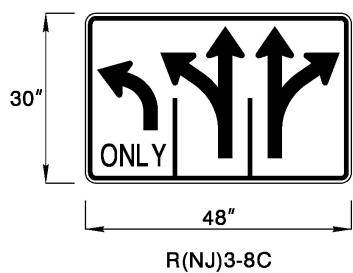


COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS


4" C

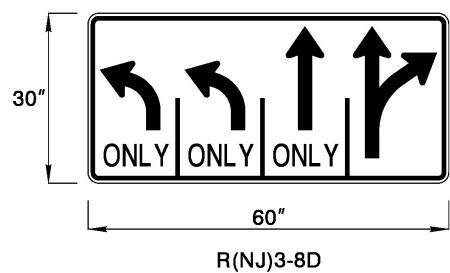

R(NJ)3-8D

LETTERS

4" C

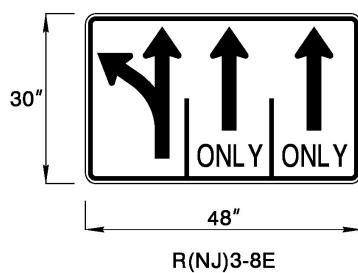


COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS


4" C



R(NJ)3-8F

LETTERS


4" C



COLORS:

ARROW - BLACK
BACKGROUND - WHITE

LETTERS

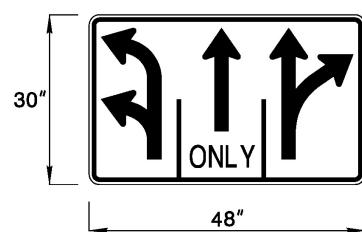

R(NJ)3-8H


LETTERS

4" C

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

The signs in the R(NJ)3-8 series serve as ready to use custom signs for the most common configurations to be selected based on the specific number of lanes and their permitted movements at NJ intersections. The MUTCD Intersection Lane Control Signs (R3-5 through R3-8) should be used for lane configurations that match those signs.




R(NJ)3-8I

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C

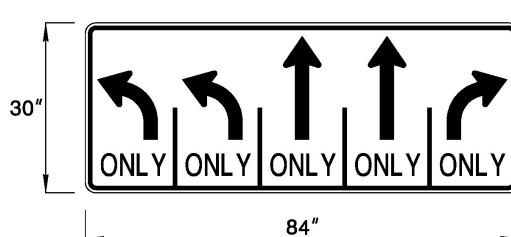


R(NJ)3-8J

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C

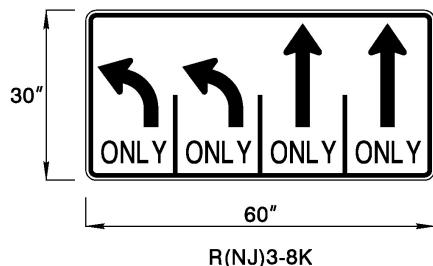


R(NJ)3-8K

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C




R(NJ)3-8L

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C

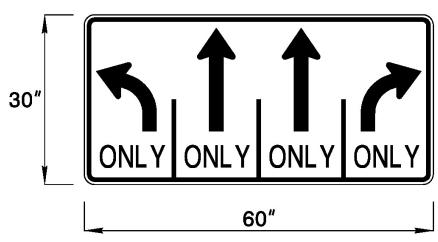


R(NJ)3-8M

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C

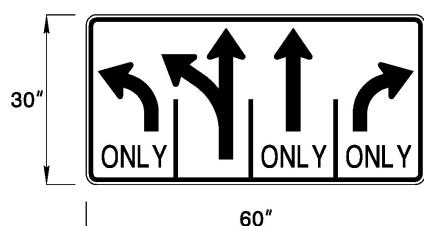

R(NJ)3-8N


COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C

The signs in the R(NJ)3-8 series serve as ready to use custom signs for the most common configurations to be selected based on the specific number of lanes and their permitted movements at NJ intersections.
The MUTCD Intersection Lane Control Signs (R3-5 through R3-8) should be used for lane configurations that match those signs.




R(NJ)3-8P

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C




R(NJ)3-8Q

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C




R(NJ)3-8R

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C

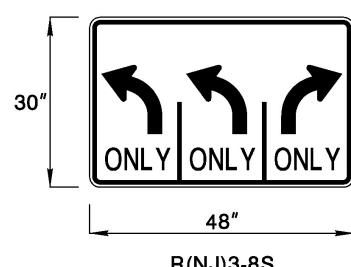


R(NJ)3-8S

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C

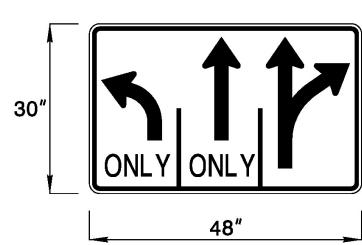


R(NJ)3-8T

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C



R(NJ)3-8U


COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS


4" C

The signs in the R(NJ)3-8 series serve as ready to use custom signs for the most common configurations to be selected based on the specific number of lanes and their permitted movements at NJ intersections.
The MUTCD Intersection Lane Control Signs (R3-5 through R3-8) should be used for lane configurations that match those signs.




LETTERS

4" C

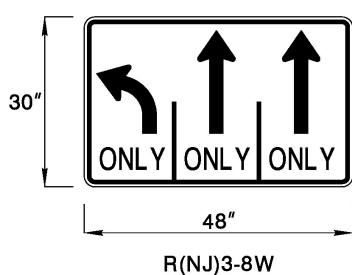


LETTERS

4" C

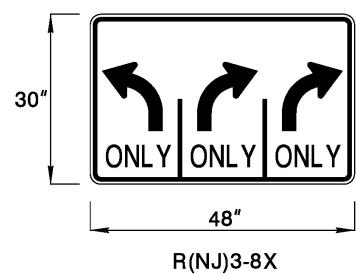


LETTERS

4" C

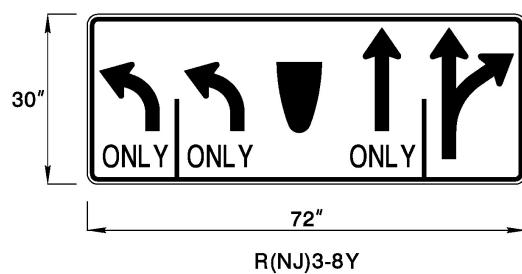


LETTERS

4" C



LETTERS

4" C

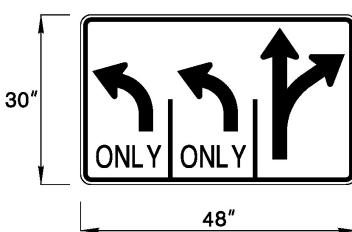


LETTERS

4" C

COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE


COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

The signs in the R(NJ)3-8 series serve as ready to use custom signs for the most common configurations to be selected based on the specific number of lanes and their permitted movements at NJ intersections.
The MUTCD Intersection Lane Control Signs (R3-5 through R3-8) should be used for lane configurations that match those signs.



LETTERS


4" C



LETTERS


4" C

COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE




LETTERS

COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE



LETTERS


4" C

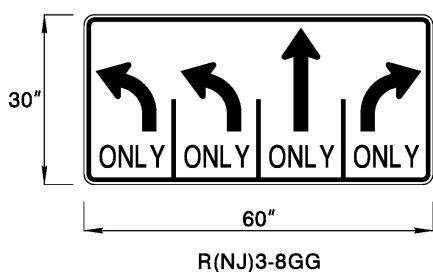

LETTERS

4" C

COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

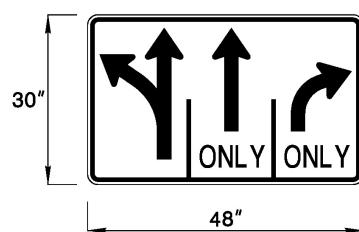


LETTERS

4" C

COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

The signs in the R(NJ)3-8 series serve as ready to use custom signs for the most common configurations to be selected based on the specific number of lanes and their permitted movements at NJ intersections.
The MUTCD Intersection Lane Control Signs (R3-5 through R3-8) should be used for lane configurations that match those signs.

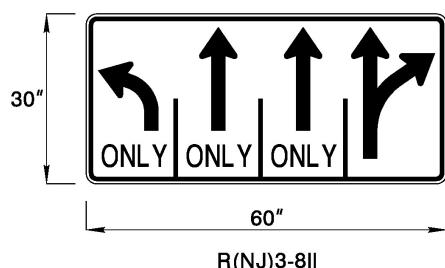


R(NJ)3-8II

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C




R(NJ)3-8JJ

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C

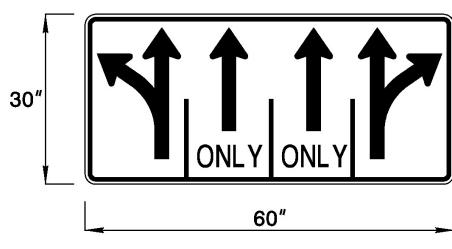


R(NJ)3-8KK

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C

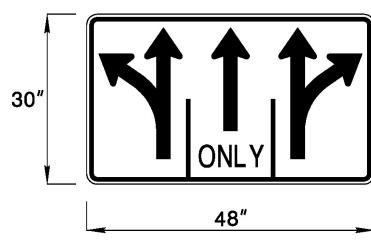


R(NJ)3-8LL

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C




R(NJ)3-8MM

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C

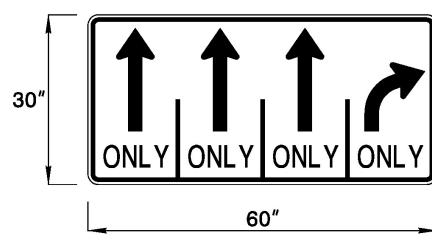

R(NJ)3-8NN


COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C

The signs in the R(NJ)3-8 series serve as ready to use custom signs for the most common configurations to be selected based on the specific number of lanes and their permitted movements at NJ intersections.
The MUTCD Intersection Lane Control Signs (R3-5 through R3-8) should be used for lane configurations that match those signs.




LETTERS

4" C

R(NJ)3-8PP

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE




LETTERS

4" C

R(NJ)3-8QQ

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

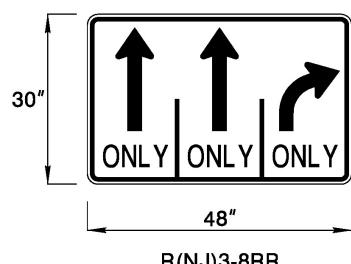


LETTERS

4" C

R(NJ)3-8RR

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

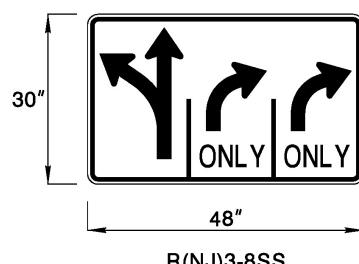


LETTERS

4" C

R(NJ)3-8SS

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE




LETTERS

4" C

R(NJ)3-8TT

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

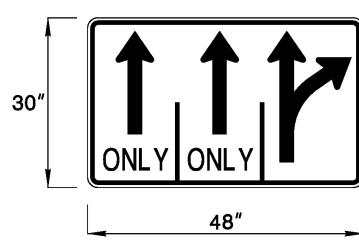

LETTERS


4" C

R(NJ)3-8UU

COLORS:


TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

The signs in the R(NJ)3-8 series serve as ready to use custom signs for the most common configurations to be selected based on the specific number of lanes and their permitted movements at NJ intersections.
The MUTCD Intersection Lane Control Signs (R3-5 through R3-8) should be used for lane configurations that match those signs.

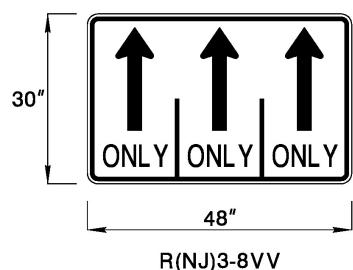


LETTERS

4" C

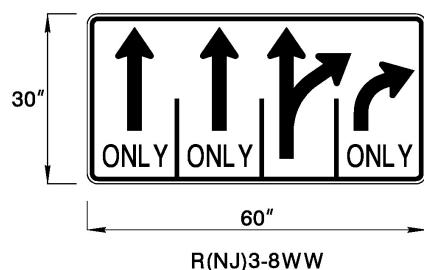


LETTERS

4" C

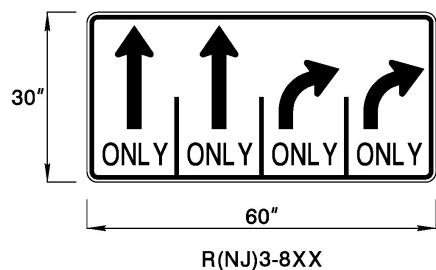


LETTERS

4" C

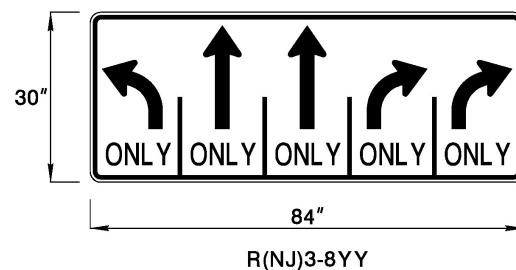


LETTERS

4" C



LETTERS

4" C

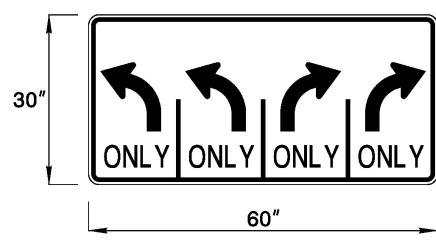


LETTERS

4" C

COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE


COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

The signs in the R(NJ)3-8 series serve as ready to use custom signs for the most common configurations to be selected based on the specific number of lanes and their permitted movements at NJ intersections. The MUTCD Intersection Lane Control Signs (R3-5 through R3-8) should be used for lane configurations that match those signs.

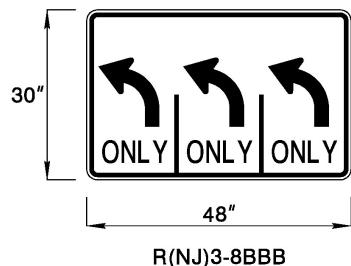


LETTERS
4" C

COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

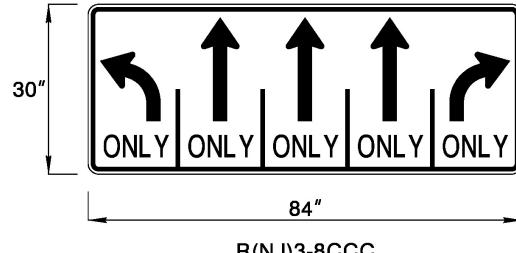


LETTERS
4" C

COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

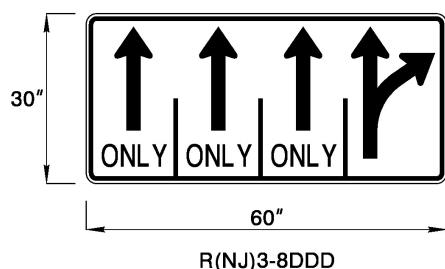


LETTERS
4" C

COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

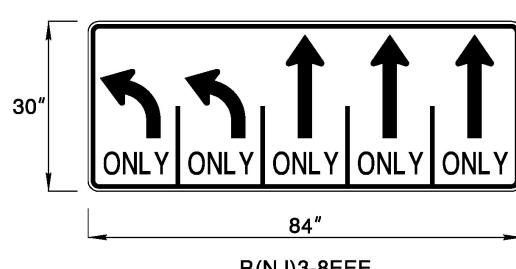


LETTERS
4" C

COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

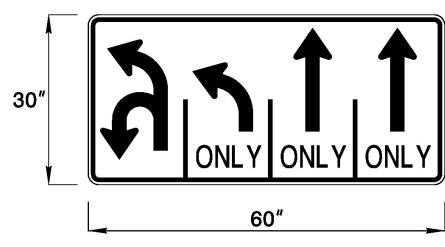

LETTERS
4" C


COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

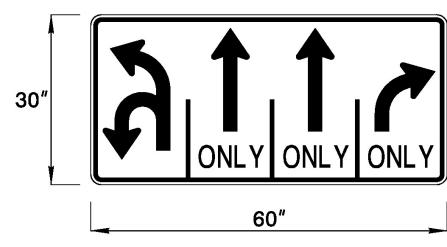

LETTERS
4" C

COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

The signs in the R(NJ)3-8 series serve as ready to use custom signs for the most common configurations to be selected based on the specific number of lanes and their permitted movements at NJ intersections.
The MUTCD Intersection Lane Control Signs (R3-5 through R3-8) should be used for lane configurations that match those signs.

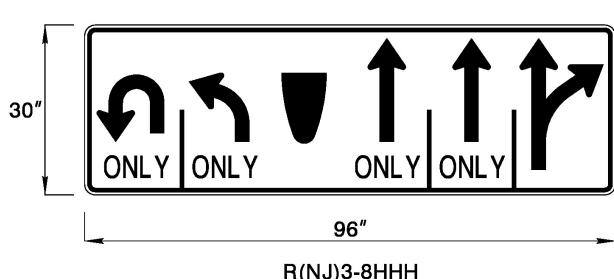


R(NJ)3-8HHH

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C




R(NJ)3-8III

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C

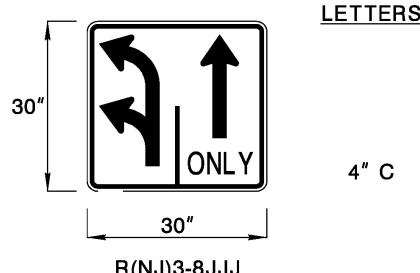


R(NJ)3-8JJJ

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C

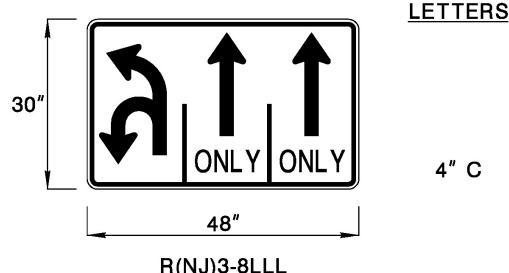


R(NJ)3-8LLL

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C

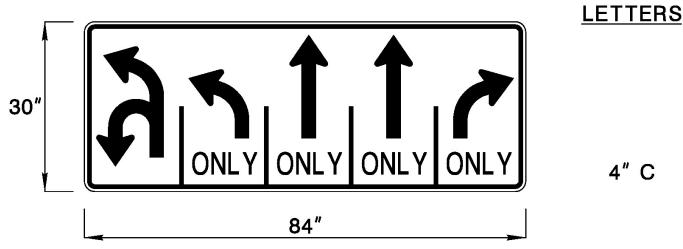


R(NJ)3-8MMM

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C

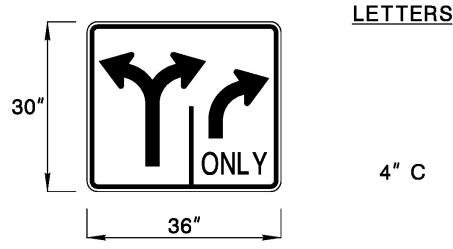


R(NJ)3-8NNN

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

The signs in the R(NJ)3-8 series serve as ready to use custom signs for the most common configurations to be selected based on the specific number of lanes and their permitted movements at NJ intersections.
The MUTCD Intersection Lane Control Signs (R3-5 through R3-8) should be used for lane configurations that match those signs.

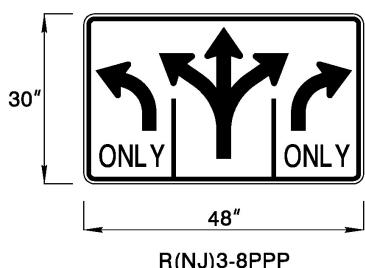


COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C

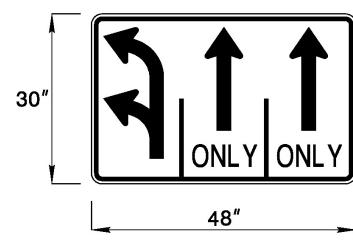


COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C




COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C




COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS

4" C


The R(NJ)3-18D and R(NJ)3-18J signs should be installed in locations where trucks exceeding a certain weight or length are prohibited from making left and u-turns by a NJ Traffic Regulation. For unconditional restrictions, use R3-18. The prohibition will be specified by NJ Traffic Regulations.

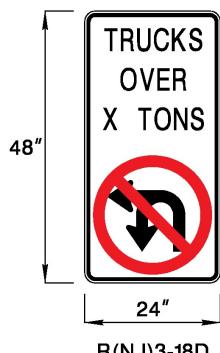

R(NJ)3-18D

LETTERS

4" C
4" C
4" C



R(NJ)3-18I

LETTERS

* 4" C
4" C
4" C


COLORS:

TEXT - BLACK
ARROW - BLACK
SYMBOL - RED
BACKGROUND - WHITE

COLORS:

TEXT - BLACK
ARROW - BLACK
SYMBOL - RED
BACKGROUND - WHITE


* REDUCE SPACING TO FIT PANEL WIDTH.

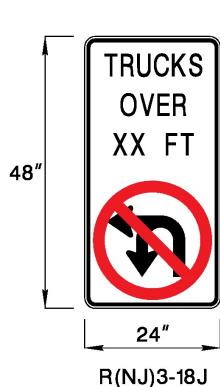

R(NJ)3-18J

LETTERS

4" C
4" C
4" C

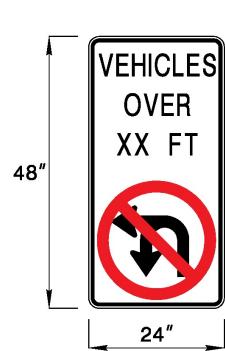

R(NJ)3-18K

LETTERS

* 4" C
4" C
4" C


COLORS:

TEXT - BLACK
ARROW - BLACK
SYMBOL - RED
BACKGROUND - WHITE

COLORS:

TEXT - BLACK
ARROW - BLACK
SYMBOL - RED
BACKGROUND - WHITE

* REDUCE SPACING TO FIT PANEL WIDTH.



R(NJ)3-19C

LETTERS

* 5" C
* 5" C
* 5" C

The R(NJ)3-18I and R(NJ)3-18K signs should be installed in locations where vehicles exceeding a certain weight or length are prohibited from making left and u-turns by a NJ Traffic Regulation. For unconditional restrictions, use R3-18. The prohibition will be specified by NJ Traffic Regulations.

ARROW

WIDTH: 5.5"
LENGTH: 7.5"
ANGLE: 120°


COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE


* REDUCE SPACING TO FIT PANEL WIDTH.

The R(NJ)3-19C sign should be installed where left turn movements are made by 2 or more lanes. For single left turn lanes, use R3-19.

The R(NJ)3-23BR should be installed when a left turn is permitted from a left lane but a U-turn is not. If a left turn is also prohibited, use R3-23 or R3-24. The R(NJ)3-23BL should be installed when a left turn and U-turn are not permitted from a left lane, and there is no right turn movement at the intersection. If a right turn is permitted, the R3-23, R3-24, or R3-25 should be considered.

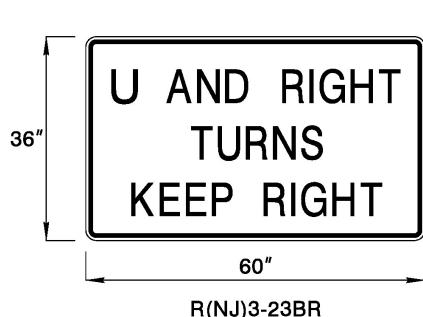

LETTERS
 "U" - 6" E
 "AND RIGHT" - 6" D
 6" D
 6" D

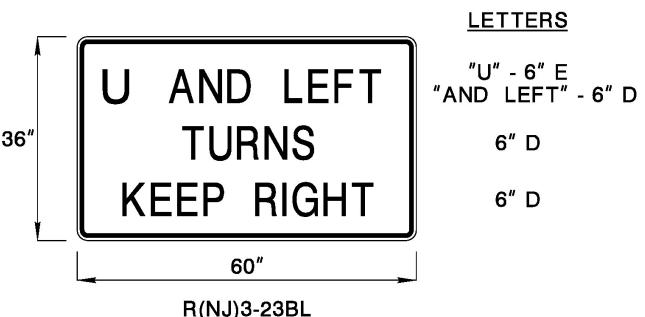


LETTERS
 "U" - 6" E
 "AND LEFT" - 6" D
 6" D
 6" D

COLORS:
 TEXT - BLACK
 BACKGROUND - WHITE

COLORS:
 TEXT - BLACK
 BACKGROUND - WHITE

The R(NJ)3-23C should be installed when a left turn and U-turn are permitted from the left lane, but it is not obvious to the driver due to unique geometry at the intersection. Otherwise, no sign should be installed.

The R(NJ)3-23D should be installed when the U-turn movement is not permitted from the right lane of a 2-lane left turn movement that is separated from the adjacent thru lanes.

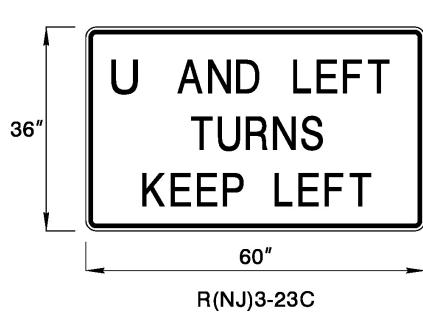

LETTERS
 "U" - 6" E
 "AND LEFT" - 6" D
 6" D
 6" D



LETTERS
 "NO" - 8" D
 "U" - 6" E
 "TURN" - 6" D
 6" D
 6" D

COLORS:
 TEXT - BLACK
 BACKGROUND - WHITE

COLORS:
 TEXT - BLACK
 BACKGROUND - WHITE

The R(NJ)3-23E should be installed at a location to inform drivers in advance where a left turn is prohibited from the left lane and there are no U-turn nor right turn movements. If there are U-turns or right turns, use R3-23.

The R(NJ)3-24C should be installed at a location where a left turn movement is provided via a jughandle ramp and there are no U-turn nor right turn movements. If a U-turn and right turn are included in the movement, use R3-24.



LETTERS
 C
 D



LETTERS
 8" C

COLORS:
 TEXT - BLACK
 BACKGROUND - WHITE

COLORS:
 TEXT - BLACK
 ARROW - BLACK
 BACKGROUND - WHITE

ARROW
 WIDTH: 8"
 LENGTH: 11"
 ANGLE: 45°

<u>A</u> x <u>B</u>	<u>C</u>	<u>D</u>
48" x 24"	6" C	6" C*
72" x 30"	8" C	8" C

* REDUCE SPACING TO FIT PANEL WIDTH.

The R(NJ)3-25C should be installed at a location where a left turn movement is provided via a right turn. This will occur at locations where a jughandle is not present, but left turns can be made "around the block" or via a roundabout. If right and u-turns are also provided by the same turn, use R3-25.

The R(NJ)3-26C should be installed at a location where a left turn movement is provided downstream of the typical left turn location. This can occur when a jughandle is downstream of an intersection. If U-turns are included in the movement, use R3-26.



R(NJ)3-25C


COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS
8" C

ARROW
WIDTH: 6"
LENGTH: 12"
ANGLE: 0°



R(NJ)3-26C



R(NJ)3-26C


COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS
8" D

ARROW
WIDTH: 6"
LENGTH: 12"
ANGLE: 90°

The R(NJ)3-26E should be installed at a location where a U-turn movement is provided downstream and the distance is meant to improve driver awareness for the location when it is not apparent to the driver. When the U-turn movement is located in a typical configuration, use R3-26a.

The R(NJ)3-27 should be installed at a location where left and U-turn movements are provided downstream and to the left of the typical left turn location. This can occur on bifurcated highways where the roadway is split by properties in the median.

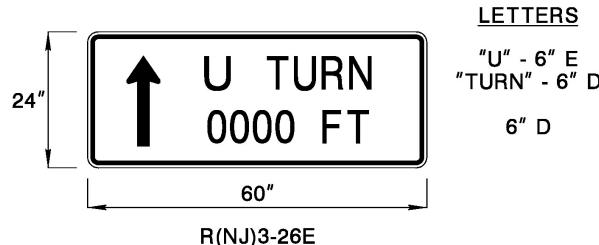


R(NJ)3-26E


COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS
"U" - 6" E
"TURN" - 6" D
6" D

ARROW
WIDTH: 6"
LENGTH: 16"
ANGLE: 90°

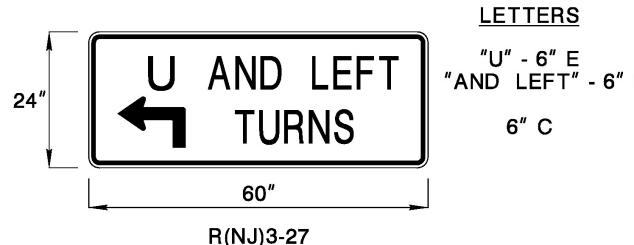

R(NJ)3-27




R(NJ)3-27

COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

LETTERS
"U" - 6" E
"AND LEFT" - 6" C
6" C

ARROW
WIDTH: 5"
DIMENSIONS: 12" x 9"




R(NJ)3-27AL

LETTERS

5" E
5" C
5" C
5" C

COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

ARROW
WIDTH: 5"
LENGTH: 9.5"
ANGLE: 135°



R(NJ)3-27BR

LETTERS

5" E
5" C
5" C
5" C


COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

ARROW
WIDTH: 5"
LENGTH: 12"
ANGLE: 0°

The R(NJ)3-26AL should be installed at a location where left and U-turn movements are provided to the left. The arrow is meant to provide clearer direction. Additionally, this specific sign should be installed in locations where right-of-way and roadside space are limited to 24" wide. Where right-of-way and roadside space can accommodate 30" or more width, use R3-19b.

The R(NJ)3-26BR should be installed at a location where left and U-turn movements are provided to the right. Additionally, this specific sign should be installed in locations where right-of-way and roadside space are limited to 24" wide. Where right-of-way and roadside space can accommodate 60" or more width, use R3-25a.

The R(NJ)3-28 series signs should be used to regulate U-turn movements at locations where right-of-way and roadside space are limited to 24" and 36". Where right-of-way and roadside space can accommodate 72" width, use R3-24b, R3-25b, or R3-26a.




R(NJ)3-28L

LETTERS

C

D



R(NJ)3-28R

LETTERS


C

D

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

<u>A</u> x <u>B</u>	<u>C</u>	<u>D</u>	<u>ARROW</u>
24" x 30"	8" E	5" D	6" x 9.5" (135°)
36" x 48"	10" E	6" D	8" x 16" (135°)




R(NJ)3-28AL

LETTERS

C

D



R(NJ)3-28AR

LETTERS

C

D

COLORS:


TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

<u>A</u> x <u>B</u>	<u>C</u>	<u>D</u>	<u>ARROW</u>
24" x 30"	8" E	5" D	6" x 12" (180°)
36" x 48"	10" E	6" D	8" x 25.5" (180°)

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

<u>A</u> x <u>B</u>	<u>C</u>	<u>D</u>	<u>ARROW</u>
24" x 30"	8" E	5" D	6" x 12" (0°)
36" x 48"	10" E	6" D	8" x 25.5" (0°)



R(NJ)3-28B

LETTERS

C


D

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE


<u>A</u> x <u>B</u>	<u>C</u>	<u>D</u>	<u>ARROW</u>
24" x 30"	8" E	5" D	6" x 7" (90°)
36" x 48"	10" E	6" D	8" x 15" (90°)

The R(NJ)3-29 series signs should be used to regulate U-turn movements at locations where left and right turns are not permitted. The R(NJ)3-29AL, R(NJ)3-29AR, and R(NJ)3-29B signs should be used at locations where right-of-way and roadside space are limited to 24" or 36".

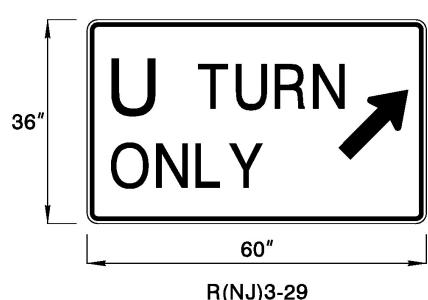

R(NJ)3-29

LETTERS
"U" - 10" E
"TURN" - 8" D
8" D



R(NJ)3-29AL

LETTERS
5" E
5" D
5" D

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

ARROW

WIDTH: 8"
LENGTH: 16"
ANGLE: 45°

LETTERS
5" E
5" D
5" D

COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

ARROW
WIDTH: 6"
LENGTH: 12"
ANGLE: 180°



R(NJ)3-29AR

LETTERS

5" E
5" D
5" D

COLORS:


TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

ARROW

WIDTH: 6"
LENGTH: 12"
ANGLE: 0°

LETTERS

C
D
D
D



R(NJ)3-29B


COLORS:

TEXT - BLACK
BACKGROUND - WHITE

A x B	C	D
24" x 30"	6" E	4" D
36" x 48"	10" E	6" D

The R(NJ)4-20 series signs should be used to regulate all traffic movements at locations where it is not apparent for drivers.

An example would be where a two-way roadway becomes a one-way roadway, and the one direction of traffic must take a ramp to continue their path. The R(NJ)4-20 series signs serve to provide arrow alternatives to the R4-20 sign.



R(NJ)4-20A

LETTERS


C
D

COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

A x B	C	D	ARROW
24" x 30"	4" C	4" C *	6" x 16" (45°)
36" x 48"	8" C	8" B	8" x 25.5" (45°)

* REDUCE SPACING TO FIT PANEL WIDTH.



R(NJ)4-20B

LETTERS

C
D


COLORS:

TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

A x B	C	D	ARROW
24" x 30"	4" C	4" C *	6" x 16"
36" x 48"	8" C	8" B	8" x 15.5"

* REDUCE SPACING TO FIT PANEL WIDTH.

The R(NJ)5-2 series signs provide specific exclusion information for trucks in the left lane. Some locations will exclude all trucks, while other locations will exclude trucks of a certain weight, based on specific NJ Traffic Regulations. In locations where trucks are prohibited in general, use R5-2b or R5-4.

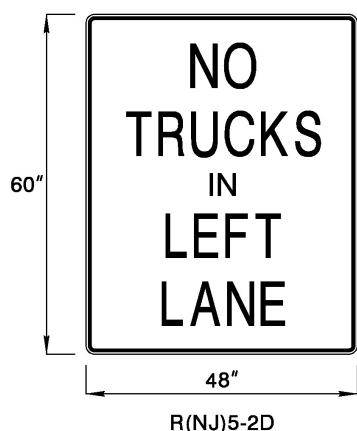


COLORS:

TEXT - BLACK
BACKGROUND - WHITE

LETTERS

8" D
8" D
4" D
8" D
8" D

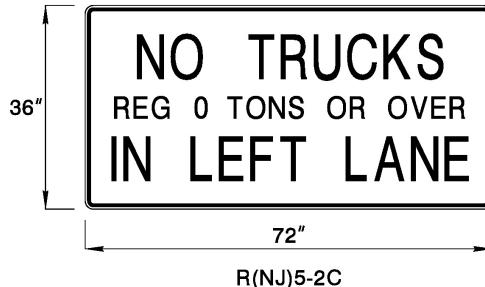

LETTERS


8" C
4" D
8" C

COLORS:

TEXT - BLACK
BACKGROUND - WHITE

The R(NJ)5-10D sign should be used to exclude a combination of travelers in NJ, where it is expected horses will be a primary means of travel. Otherwise, use the R5-10, R5-10a, or R5-10b signs.

The R(NJ)5-10E sign should be used to inform travelers of typical prohibited activities on NJDOT-owned bridges. Prohibited activities are based on NJ Traffic Regulations.




COLORS:

TEXT - BLACK
BACKGROUND - WHITE

LETTERS

3.5" D
3.5" C
3.5" C
3.5" C
3.5" C




LETTERS

3" D
2" D
2" D
2" D
2" D
2" D

COLORS:

TEXT - BLACK
BACKGROUND - WHITE

The R(NJ)5-13A series signs support NJ Traffic Regulations against soliciting or vending at certain locations along NJDOT roadways. They should be used in locations where it is expected those activities may occur and be oriented to face pedestrian travelers only.




COLORS:

TEXT - BLACK
BACKGROUND - WHITE

LETTERS

4" C
4" C
3" C
4" C
3" C
4" C




LETTERS

4" D
4" D
4" D
4" D

COLORS:

TEXT - BLACK
BACKGROUND - WHITE




LETTERS

3" C

3" C

R(NJ)5-19A



LETTERS

4" C

4" C

4" C

4" C

R(NJ)5-19B



COLORS:

TEXT - BLACK

BACKGROUND - WHITE

The R(NJ)5-19 series signs support regulations to prohibit people from accessing State property at locations that where it is expected they may access the property either on purpose or by accident.

The R(NJ)7-4 series signs support regulations to prohibit vehicles from stopping or standing at specific locations on NJDOT roadways. They combine the messages provided by R7-1 and R7-4 signs to support the specific NJ Traffic Regulations. The R(NJ)7-4TL, R(NJ)7-4TR, and R(NJ)7-4TX signs are used when the NJ Traffic Regulations apply to a specific time of the day.

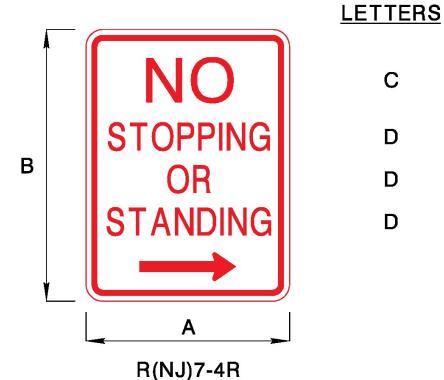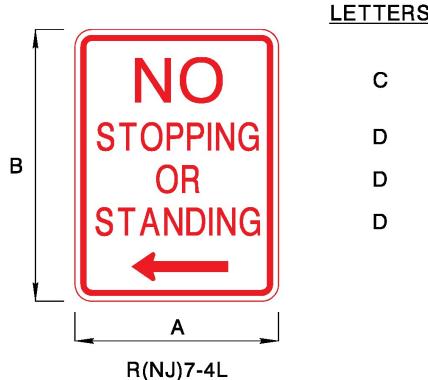

COLORS:



TEXT - RED
ARROW - RED
BACKGROUND - WHITE

	A x B	C	D	ARROW
STATE HIGHWAY	18" x 24"	4" D	2.5" C	2.5" x 8.5"
LOCAL HIGHWAY	12" x 18"	3" D	2" C	2.25" x 7.75"

COLORS:

TEXT - RED
ARROW - RED
BACKGROUND - WHITE

	A x B	C	D	ARROW
STATE HIGHWAY	18" x 24"	4" D	2.5" C	2.5" x 8.5"
LOCAL HIGHWAY	12" x 18"	3" D	2" C	2.25" x 7.75"

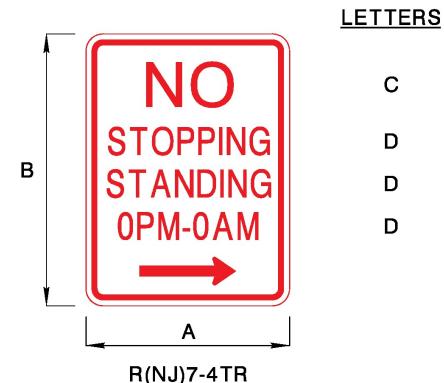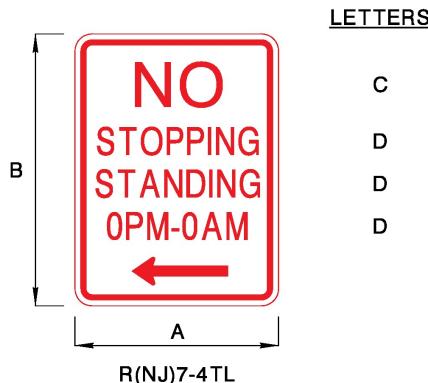

COLORS:

TEXT - RED
ARROW - RED
BACKGROUND - WHITE


	A x B	C	D	ARROW
STATE HIGHWAY	18" x 24"	4" D	2.5" C	2.5" x 8.5"
LOCAL HIGHWAY	12" x 18"	3" D	2" C	2.25" x 7.75"

COLORS:

TEXT - RED
ARROW - RED
BACKGROUND - WHITE

	A x B	C	D	ARROW
STATE HIGHWAY	18" x 24"	4" D	2.5" C	2.5" x 8.5"
LOCAL HIGHWAY	12" x 18"	3" D	2" C	2.25" x 7.75"

The R(NJ)7-4 series signs support regulations to prohibit vehicles from stopping or standing at specific locations on NJDOT roadways. They combine the messages provided by R7-1 and R7-4 signs to support the specific NJ Traffic Regulations. The R(NJ)7-4TL, R(NJ)7-4TR, and R(NJ)7-4TX signs are used when the NJ Traffic Regulations apply to a specific time of the day.

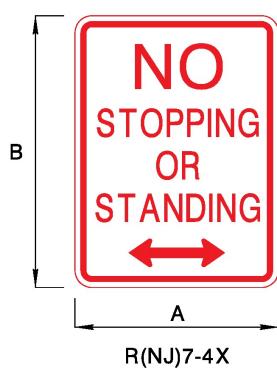


LETTERS

C
D
D
D

**NO
STOPPING
OR
STANDING**

R(NJ)7-4X

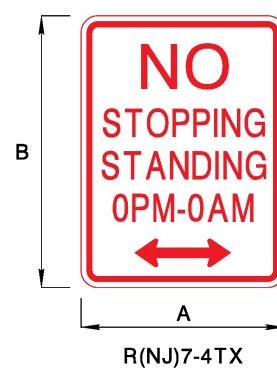

LETTERS

C
D
D
D

**NO
STOPPING
STANDING
OPM-0AM**


R(NJ)7-4TX

COLORS:

TEXT - RED
ARROW - RED
BACKGROUND - WHITE

	<u>A</u> x <u>B</u>	<u>C</u>	<u>D</u>	ARROW
STATE HIGHWAY	18" x 24"	4" D	2.5" C	2.5" x 8.5"
LOCAL HIGHWAY	12" x 18"	3" D	2" C	2.25" x 7.75"

The R(NJ)7-8A sign is to be used in conjunction with R7-8 when the penalties are specific to NJ Traffic Regulations for the vehicle being towed and a \$250 fine for first offenses or \$250 fine plus 90 days of community service for subsequent offenses. When the penalties are not specific to NJ Traffic Regulations, use R7-8.

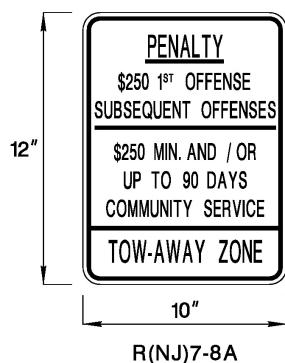

LETTERS

1" C
0.75" C
0.75" C
0.75" C
0.75" C
0.75" C
1" C

COLORS:


TEXT - BLACK
BACKGROUND - WHITE

NOTE: THIS SIGN SHALL BE USED IN CONJUNCTION WITH SIGN R7-8.

	<u>A</u> x <u>B</u>	<u>C</u>	<u>D</u>	ARROW
STATE HIGHWAY	18" x 24"	4" D	2.5" C	2.5" x 8.5"
LOCAL HIGHWAY	12" x 18"	3" D	2" C	2.25" x 7.75"

LETTERS

0.75" C
0.75" C
0.5" C



COLORS:

BORDER - GREEN
BACKGROUND - WHITE
"PLATE OR PLACARD / #00000000 ONLY"
TEXT - GREEN
"PURSUANT to NJSA 39:4-197.6"
TEXT - BLUE

NOTE: BORDER WIDTH 0.50"
SIGN RADIUS 0.75"

NOTE: THIS SIGN SHALL BE USED IN CONJUNCTION WITH SIGN R7-8.



LETTERS

C
D
E
E
E

COLORS:
"NO PARKING"
TEXT - WHITE
BACKGROUND - RED
"WHEN ROAD IS SNOW COVERED"
TEXT - RED
BACKGROUND - WHITE

<u>A</u> x <u>B</u>	<u>C</u>	<u>D</u>	<u>E</u>
12" x 18"	3" C	3" B	2" B
18" x 24"	4" C	4" B	2" C


The R(NJ)7-203A sign should be used to support NJ Traffic Regulations that prohibit parking on roadways when covered in snow, regardless of if the road is considered a snow emergency route. If NJ Traffic Regulations are redefined for snow emergency routes, use R7-203.

R(NJ)8-3 is a temporary sign to be used when NJ Traffic Regulations prohibit parking for emergencies.
 R(NJ)8-4 is a temporary sign to be used when NJ Traffic Regulations prohibit parking for Trucks, Vans, and SUVs.



LETTERS

3" B
4" C
4" C



LETTERS


3" C
3" B
1" LINE
2" C
2" C
2" C

COLORS:

TEXT - RED
BACKGROUND - WHITE


NOTE: TEMPORARY TYPE SIGNS TO BE USED
WITH ORDINANCES PROHIBITING PARKING FOR
SNOW REMOVAL AND OTHER EMERGENCIES.

The R(NJ)10-7A sign should be installed at driveway locations where the word "driveway" more accurately describes the approach to not be blocked. This will typically occur at driveways to emergency vehicle facilities. All other types of locations should use R10-7.

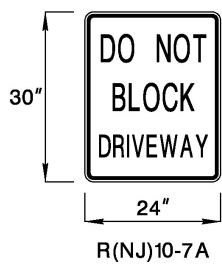

LETTERS

5" C
5" C
4" C

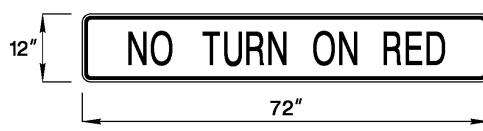

LETTERS


6" C

COLORS:

TEXT - BLACK
BACKGROUND - WHITE

NOTE: TO BE MOUNTED ON SIGNAL MAST ARM ONLY.

The R(NJ)10-11F sign is a modification to the R10-11 sign for locations where the sign should be installed to hang from a traffic signal mast arm. The R(NJ)10-11F should be used on mast arms that require a free swinging sign to reduce wind resistance and structural fatigue. Typically, on aluminum mast arms. On mast arms that can support the wind resistance, install R10-11 directly to the mast arm.

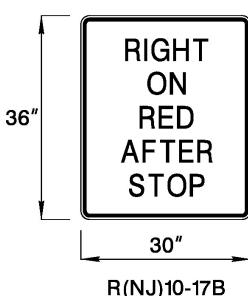

LETTERS

4" D
4" D
4" D
4" D
4" D


COLORS:

TEXT - BLACK
CIRCLE SYMBOL - RED, 6" DIAMETER
BACKGROUND - WHITE

The R(NJ)10-17B sign should be used for locations where right turns have a large radius, allow for higher speeds, and drivers may be more inclined to roll through the stop. The sign is a reminder to the drivers to stop before turning at these locations. For movements controlled by an arrow, use R10-17a.

The R(NJ)11-15 sign is a modification to the R11-4 sign for locations where a road is not physically closed, but an NJ Traffic Regulation prohibits thru traffic on that roadway.

The R(NJ)12-8ARR sign is used in locations where vehicles over a specific weight are prohibited, by NJ Traffic Regulations, from making a turn on a red indication at an NJDOT-owned signalized intersection. This typically occurs on turns with short radii, and larger vehicle paths may overlap other non-conflicting movements.




LETTERS

C
C
C

R(NJ)11-15
COLORS:
TEXT - BLACK
BACKGROUND - WHITE

A x B	C
30" x 24"	5" C
48" x 36"	8" C

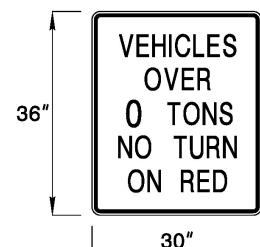


LETTERS

4" C
4" C
4" C / 5" C NUM.
4" C
4" C

R(NJ)12-8ARR

COLORS:
TEXT - BLACK
BACKGROUND - WHITE

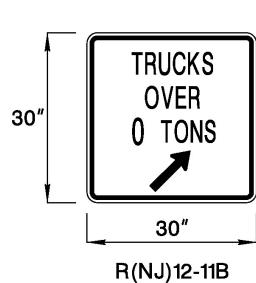


LETTERS

4" C
4" C
4" C / 5" C NUM.

R(NJ)12-11B
COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE

ARROW
WIDTH: 4"
LENGTH: 9.5"
ANGLE: 45°

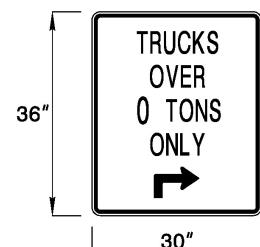

LETTERS

4" C
4" C
4" C / 5" C NUM.
4" C

R(NJ)12-11C

COLORS:
TEXT - BLACK
ARROW - BLACK
BACKGROUND - WHITE


ARROW
WIDTH: 4"
DIMENSIONS: 8" x 5.5"

R(NJ)12-11 series signs should be installed at locations where NJ Traffic Regulations require trucks over a certain weight follow certain paths as per the NJ Access Network.

For general weight limit restrictions, use R12-1, R12-2, R12-4, R12-5, or R12-6 signs.

For general truck path identification and prohibition, as part of the National Network, use R14-1, R14-4 and R14-5.

The R(NJ)17-1 sign should be installed in locations where littering is expected and NJ Traffic Regulations describe the specific fines imposed for littering in that area.

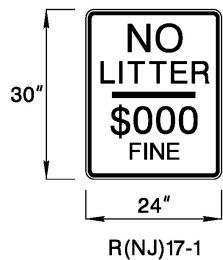


LETTERS

5" E
4" E
5" E
3" E

R(NJ)17-1

COLORS:

TEXT - BLACK
BACKGROUND - WHITE

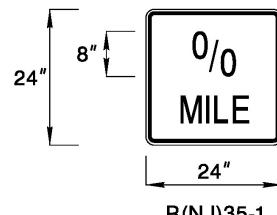

LETTERS

5" D
5" D


R(NJ)35-1

COLORS:

TEXT - BLACK
BACKGROUND - WHITE

NOTE: TO BE MOUNTED BELOW REGULATORY SIGN.

R(NJ)35-1 series signs are to be used to supplement regulatory signs and indicate the distance to the point on the roadway where the regulation occurs.

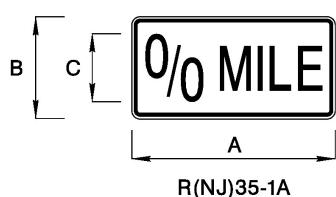

LETTERS

D

COLORS:

TEXT - BLACK
BACKGROUND - WHITE


A x B	C	D
36" x 18"	12"	8" D
48" x 24"	15"	10" D

NOTE: TO BE MOUNTED BELOW REGULATORY SIGN.

WARNING SIGNS

The W(NJ)3-7A sign is to be installed at locations where a traffic signal is metering traffic other than a ramp. An example would be at a traffic circle to control the vehicles entering the circle. For ramp metering applications, use W3-7 and W3-8 signs.

The W(NJ)4-1A sign is to be used in locations where there is a high volume of traffic changing lanes from either the right or the left lanes. For locations where traffic is merging from the right, use W4-1, W4-5, and W4-7 signs.

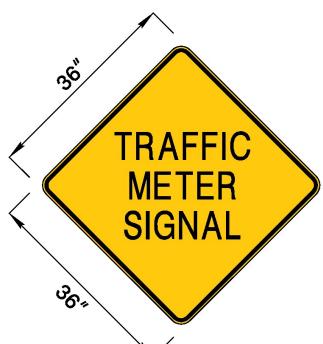

W(NJ)3-7A

LETTERS

5" D
5" D
5" D



W(NJ)4-1A

LETTERS

6" D
6" D
6" D

COLORS:

TEXT - BLACK
BACKGROUND - YELLOW

COLORS:

TEXT - BLACK
BACKGROUND - YELLOW

The W(NJ)7-7 sign is to be used in locations where an upgrade can cause speed differentials between vehicles.


It is intended to keep vehicles traveling at a constant speed. For standard grade warnings, use W7-1 series signs or W7-2 plaques.



W(NJ)7-7

LETTERS

10" C
1" LINE
10" C
10" C



W(NJ)8-5C

LETTERS

3" C
3" C
3" C

COLORS:

TEXT - BLACK
BACKGROUND - YELLOW

COLORS:

TEXT - BLACK
BACKGROUND - YELLOW


The W(NJ)8-5C sign is to be used in locations of pedestrian traffic to warn them of a surface that becomes slippery when wet. In location specific to bicycles, use WB-10.



W(NJ)9-7A

LETTERS

"RIGHT" - 8" C
"2" - 12" C
"LANE" - 8" C
8" D
8" D

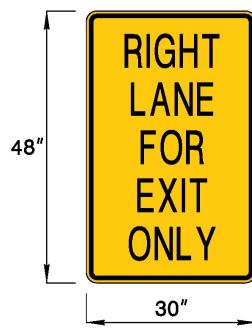

W(NJ)9-7B

LETTERS

6" C
6" C
6" C
6" C
6" C

COLORS:

TEXT - BLACK
BACKGROUND - YELLOW

COLORS:

TEXT - BLACK
BACKGROUND - YELLOW

The W(NJ)9-7A sign is to be used in locations where there is a double right lane exit. In locations with a single right lane exit, use the W9-7 sign.

The W(NJ)9-7B sign should be used in locations where right-of-way and roadside space are limited to 30". Where right-of-way and roadside space can accommodate 132", use the W9-7 sign.



W(NJ)11-10A

LETTERS

5" D
5" D
5" D

The W(NJ)11-10A sign should be used in specific locations to warn traffic of rescue vehicles. In locations to warn of other emergency vehicles, use W11-8.




W(NJ)11-8B

LETTERS
5" C
5" C

COLORS:

TEXT - BLACK
BACKGROUND - YELLOW

The W(NJ)11-10A sign should be used in locations where it is known that trucks are moving slower than the speed limit and may cause noticeable speed differential. In locations where traffic should be warned about trucks in general, use W11-10.



W(NJ)16-21P

LETTERS

4" C


COLORS:

TEXT - BLACK
BACKGROUND - YELLOW

NOTE: TO BE MOUNTED ABOVE THE R12-1 SIGN.

The W(NJ)16-21P should be used in conjunction with weight limit restrictions at locations where a bridge is present. It increases the conspicuity of the prohibition.

COLORS:
TEXT - BLACK
BACKGROUND - YELLOW

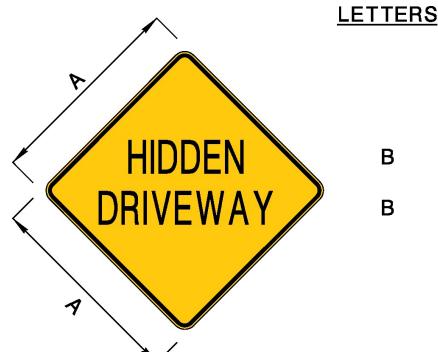

W(NJ)25-2

COLORS:
TEXT - BLACK
BACKGROUND - YELLOW

A	B
30"	4" D
36"	6" C

The W(NJ)25-2 sign should be used in locations where a driveway is hidden from view due to horizontal alignment. The term "driveway" can represent a different type of approach than a typical roadway (e.g. children more likely to be present). For all other types of intersections, use W1-10 series signs.



W(NJ)30-1

LETTERS


8" D
8" D

COLORS:


TEXT - BLACK
BACKGROUND - YELLOW

The W(NJ)30-1 sign should be used temporarily in locations where an Exit has been renumbered. This is to allow traffic to become accustomed to the new exit number.

OTHER SIGNS

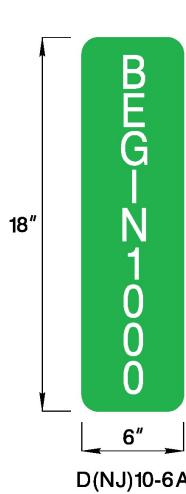

LETTERS
 2" D (TYP.)
 2" D (TYP.)

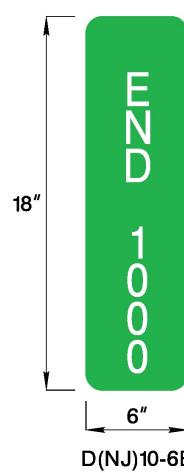

LETTERS
 2" D (TYP.)
 2" D (TYP.)


COLORS:

TEXT - WHITE
 BACKGROUND - GREEN
 BORDER - NONE

COLORS:

TEXT - WHITE
 BACKGROUND - GREEN
 BORDER - NONE

NOTE: THE NJDOT USES THE D(NJ)10-6A AND D(NJ)10-6B SIGNS TO MARK A MEASURED STRAIGHT ONE-THOUSAND FOOT TRACK TO BE USED FOR THE CALIBRATION OF DISTANCE MEASURING DEVICES.




LETTERS
 2.5" C
 2.5" C

COLORS:

TEXT - WHITE
 TAPE - WHITE
 BACKGROUND - GREEN

NOTE: THIS SIGN IS USED BY THE NJDOT TO MARK STRUCTURES ALONG AND OVER THE HIGHWAY. THIS SIGN IS A DECAL TYPE CONSTRUCTED WITH PRESSURE SENSITIVE ADHESIVE.




LETTERS
 2" C
 2" C

COLORS:

TEXT - WHITE
 TAPE - WHITE
 BACKGROUND - GREEN

NOTE: THIS SIGN IS USED BY THE NJDOT TO MARK STRUCTURES ALONG AND OVER THE HIGHWAY. THIS SIGN IS A DECAL TYPE CONSTRUCTED WITH PRESSURE SENSITIVE ADHESIVE.

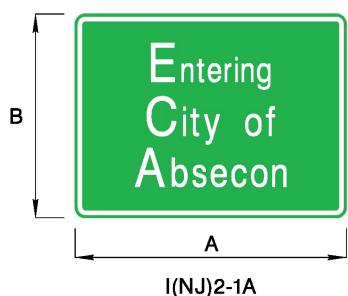

LETTERS

6" D - UPPER CASE /
4.5" - LOWER CASE
7" D - UPPER CASE /
5.25" D - LOWER CASE
7" D - UPPER CASE /
5.25" D - LOWER CASE


Entering
City of
Absecon

I(NJ)2-1A

COLORS:

TEXT - WHITE
BACKGROUND - GREEN

MUNICIPAL INCORPORATIONS:
"Boro" "City" "Town" "Twp" "Village"

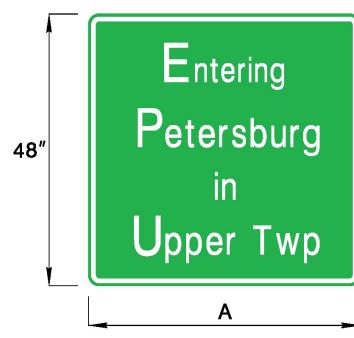

LETTERS

6" D - UPPER CASE /
4.5" - LOWER CASE
7" D - UPPER CASE /
5.25" D - LOWER CASE
5" D - LOWER CASE
7" D - UPPER CASE /
5.25" D - LOWER CASE

Entering
Petersburg
in
Upper Twp

I(NJ)2-1B

COLORS:

TEXT - WHITE
BACKGROUND - GREEN

NUM. OF LINES	B	NUM. OF LETTERS IN THE LONGEST LINE	A
2	30"	8	48"
3	42"	12	60"
4	48"	13	72"
-	-	15	84"

NUM. OF LETTERS IN THE LONGEST LINE	A
8	48"
12	60"
13	72"
15	84"

I(NJ)2-1 series signs should be used at the jurisdictional boundary of the municipality, county, or unincorporated community that traffic is entering. For signs that only require 18" or 36" width, use the I2-1 sign.

REMOVED NJDOT SIGN	SUPERSEDED BY SIGN	REMOVED NJDOT SIGN	SUPERSEDED BY SIGN	REMOVED NJDOT SIGN	SUPERSEDED BY SIGN
D(NJ)4-2AL	D4-2	R(NJ)3-1B	R3-1	R(NJ)7-1	R7-1
D(NJ)4-2AL	D4-2	R(NJ)3-2A	R3-2	R(NJ)7-4	
D(NJ)4-2B	D12-2	R(NJ)3-2B	R3-2	R(NJ)8-9	R5-11
D(NJ)5-1B		R(NJ)3-2C	R3-2 & R(NJ)10-11F	R(NJ)8-10	R(NJ)7-203A
D(NJ)5-5CL		R(NJ)3-2D	R3-18	R(NJ)8-15	
D(NJ)5-5CR		R(NJ)3-2E	R3-18	R(NJ)9-3AL	R9-3bPL
D(NJ)5-8L		R(NJ)3-2F	R3-18	R(NJ)9-3AR	R9-3bPR
D(NJ)5-8R		R(NJ)3-3	R3-3	R(NJ)9-9A	
D(NJ)9-1	D12-4	R(NJ)3-3A		R(NJ)9-9C	
D(NJ)9-2A	D9-2 & D9-13dP	R(NJ)3-3B	R5-11	R(NJ)9-9S	
D(NJ)9-2BL	M6-1L	R(NJ)3-4	R3-4	R(NJ)9-10A	
D(NJ)9-2BR	M6-1R	R(NJ)3-4A	R3-4	R(NJ)10-3AX	R10-4a
D(NJ)9-2C		R(NJ)3-5L	R3-5L	R(NJ)10-3B	R10-4a
D(NJ)10-1	D10-1a	R(NJ)3-5R	R3-5R	R(NJ)10-4AX	R10-3a
D(NJ)10-2	D10-2a	R(NJ)3-7L	R3-19	R(NJ)10-4B	R10-3a
D(NJ)10-3	D10-3a	R(NJ)3-7AL	R3-19a	R(NJ)10-4S	R10-3
D(NJ)13-1	I(NJ)2-3B	R(NJ)3-7BL	R3-19b	R(NJ)10-5A	
D(NJ)13-2	I(NJ)2-3C	R(NJ)3-7LA	R(NJ)3-19C	R(NJ)10-6BL	R10-6 or R10-6a
D(NJ)14-1	I(NJ)10-6A	R(NJ)3-7RA		R(NJ)10-6BR	R10-6 or R10-6a
D(NJ)14-2	I(NJ)10-6B	R(NJ)3-8A	R(NJ)3-8RRR	R(NJ)10-6BX	R10-6 or R10-6a
D(NJ)15-1	I(NJ)2-1A	R(NJ)3-8B	R(NJ)3-8SSS	R(NJ)10-6CL	
D(NJ)15-2	I(NJ)2-1B	R(NJ)3-8Z	W16-9P	R(NJ)10-6CR	
D(NJ)16-1	D9-18b	R(NJ)3-9C	R3-9b	R(NJ)10-7	R10-7
D(NJ)16-2	D9-18b	R(NJ)3-18	R(NJ)3-7RA	R(NJ)10-10A	R10-10a
D(NJ)16-3L	D9-18b	R(NJ)3-26D		R(NJ)10-11C	
D(NJ)16-3R	D9-18b	R(NJ)4-7B	R4-8a or R4-8b	R(NJ)10-11D	R10-20aP
M(NJ)1-6	M1-6	R(NJ)4-7C	R4-7a or R4-7b	R(NJ)10-11E	R10-20aP
M(NJ)1-6A	M1-6	R(NJ)4-7D	R4-20	R(NJ)10-11G	R10-20aP
M(NJ)2-1	M2-1	R(NJ)4-7DA	R(NJ)4-20A	R(NJ)10-11H	R10-20aP
M(NJ)3-1	M3-1	R(NJ)4-7DB	R(NJ)4-20B	R(NJ)10-11I	R(NJ)10-17B
M(NJ)4-5	M4-5	R(NJ)4-7E	R4-16	R(NJ)10-11J	R(NJ)10-17B
M(NJ)4-10	M4-14	R(NJ)4-7F	R4-16	R(NJ)10-12A	
M(NJ)5-1L	M5-1L	R(NJ)5-1	R5-1	R(NJ)10-13A	
M(NJ)5-1R	M5-1R	R(NJ)5-2A		R(NJ)10-13B	
M(NJ)8-1L	M5-4	R(NJ)5-2AP	R5-2aP	R(NJ)10-13C	
M(NJ)8-1R	M5-6	R(NJ)5-2B	R5-2	R(NJ)10-13D	
M(NJ)8-2L	M5-1L	R(NJ)5-10B	R(NJ)5-10D	R(NJ)10-13E	
M(NJ)8-2R	M5-1R	R(NJ)5-11A		R(NJ)10-13F	
OM(NJ)4-AL	OM3-L	R(NJ)5-11B	R(NJ)5-10E	R(NJ)10-13G	
OM(NJ)4-AR	OM3-R	R(NJ)5-12	R(NJ)17-1	R(NJ)10-13H	
OM(NJ)4-BL	OM3-L	R(NJ)5-14A		R(NJ)10-14A	R10-32P
OM(NJ)4-BR	OM3-R	R(NJ)5-14B		R(NJ)10-14B (DESIGNATION PRIOR TO 2023)	R10-32P
R(NJ)2-2	R2-1 & R2-6	R(NJ)5-14C		R(NJ)10-14C (DESIGNATION PRIOR TO 2023)	R10-32P
R(NJ)2-6		R(NJ)5-17	G20-5aP & R2-10	R(NJ)10-14C	R10-13 & R10-6
R(NJ)2-7A	R2-10 & R2-6P	R(NJ)5-17	G20-2 & R2-11		
R(NJ)2-7B	R2-10 & R2-6P	R(NJ)5-18	R5-8		
R(NJ)3-1A	R3-1	R(NJ)6-4			

REMOVED NJDOT SIGN	SUPERSEDED BY SIGN	REMOVED NJDOT SIGN	SUPERSEDED BY SIGN	REMOVED NJDOT SIGN	SUPERSEDED BY SIGN
R(NJ)10-14D	R10-3i	R(NJ)30-6BL	R(NJ)3-28AL	W(NJ)7-6	W(NJ)7-7
R(NJ)10-14E		R(NJ)30-6BR	R(NJ)3-28AR	W(NJ)7-7 (DESIGNATION PRIOR TO 2023)	W1-13
R(NJ)10-14F		R(NJ)30-6BX	R3-26a	W(NJ)7-8	W1-13 & W13-1P
R(NJ)10-14G	R10-3c	R(NJ)30-6CL	R(NJ)3-28L	W(NJ)8-5A	W8-13
R(NJ)10-14H	R10-3b	R(NJ)30-6CR	R(NJ)3-28R	W(NJ)8-5B	W8-13
R(NJ)10-14I	R10-3c	R(NJ)30-6DL	R3-25bL	W(NJ)8-12	W8-18
R(NJ)10-14J	R10-3b	R(NJ)30-6DR	R3-25bR	W(NJ)9-3	W(NJ)9-7
R(NJ)10-15	W25-1 or W25-2	R(NJ)30-7	R3-23a	W(NJ)9-3A	W(NJ)9-7A
R(NJ)10-15A	W25-1 or W25-2	R(NJ)30-7A	R(NJ)3-23D	W(NJ)9-3B	W(NJ)9-7B
R(NJ)10-15S	R10-15	R(NJ)30-8	R3-26a & R3-25b	W(NJ)9-3L	W9-1L & W16-2P
R(NJ)10-17A	R(NJ)10-14A	R(NJ)30-8A	R3-26a & R3-25b	W(NJ)9-3R	W9-1R & W16-2P
R(NJ)11-1A	R4-17 or R4-18	R(NJ)30-9L	R(NJ)3-29AL	W(NJ)9-4	W9-1
R(NJ)12-6	R(NJ)5-2C	R(NJ)30-9R	R(NJ)3-29AR	W(NJ)9-7	W9-7R
R(NJ)12-7	R(NJ)5-2C	R(NJ)30-9CR	R(NJ)3-29	W(NJ)11-3	W11-3
R(NJ)12-8L	R(NJ)3-2D	R(NJ)30-10	R(NJ)3-29B	W(NJ)11-3A	W11-3
R(NJ)12-8R	R3-1d	R(NJ)30-11	R3-26a & R3-25b	W(NJ)11-8A	W11-8 or W(NJ)11-8B
R(NJ)12-8AL	R(NJ)3-2I	R(NJ)30-12	R3-23aL	W(NJ)11-8C	R10-13 (OVERSIZED)
R(NJ)12-8AR	R(NJ)3-1I	R(NJ)31-1	R3-23	W(NJ)11-8D	R10-13
R(NJ)12-9	R(NJ)3-4D	R(NJ)31-2A	R3-24	W(NJ)11-8E	R10-13 (OVERSIZED)
R(NJ)12-9A	R(NJ)3-4I	R(NJ)31-2B	R3-25	W(NJ)12-2A	W12-2a
R(NJ)12-10	R12-1	R(NJ)31-2C	R(NJ)3-26D	W(NJ)12-2B	W12-2a
R(NJ)12-10A	R12-1	R(NJ)31-2D	R(NJ)4-20A	W(NJ)16-3	W16-3P & W16-3aP
R(NJ)12-11	R12-1	R(NJ)31-2E	R3-23	W(NJ)16-3A	W16-3P & W16-3aP
R(NJ)12-11A	R12-1	R(NJ)31-2F	R(NJ)4-20B	W(NJ)16-4AP	W16-4P
R(NJ)12-11P	R(NJ)5-2AP	R(NJ)32-1		W(NJ)16-8A	W16-8P
R(NJ)30-1	R(NJ)3-23BR	R(NJ)32-2	W6-3	W(NJ)16-8B	W16-8P
R(NJ)30-2	R(NJ)3-23BL	R(NJ)33-1		W(NJ)16-11	W16-9P
R(NJ)30-2A	R3-26 & R3-25a	R(NJ)34-1A	R(NJ)3-26C	W(NJ)22-1	
R(NJ)30-2B	R3-26 & R3-25a	R(NJ)34-1B	R(NJ)3-24C	W(NJ)24-1	W(NJ)11-2BP
R(NJ)30-2C	R(NJ)3-23C	R(NJ)34-1C	R(NJ)3-25C	W(NJ)25-1	W(NJ)25-2
R(NJ)30-2A	R3-26 & R3-25a	R(NJ)34-1D	R(NJ)3-23E	W(NJ)25-3	S1-1
R(NJ)30-2B	R3-26 & R3-25a	R(NJ)34-1E	R3-24	W(NJ)27-1	W8-14
R(NJ)30-2D	R3-26 & R3-25a	S(NJ)3-3	S3-1	W(NJ)28-1	R3-9b
R(NJ)30-3	R3-24aR	S(NJ)4-1	S4-1P & S4-6P	W(NJ)28-2	R3-9cP & R3-9dP
R(NJ)30-3BR	R3-25aR	S(NJ)5-1	S4-3P, R2-1 & S4-2P	W(NJ)29-1	W19-1
R(NJ)30-3X	R3-26R	S(NJ)5-2	S4-5		
R(NJ)30-4	R(NJ)3-27	W(NJ)1-6L	W1-6L or W1-8L		
R(NJ)30-4L	R3-24aL	W(NJ)1-6R	W1-6R or W1-8R		
R(NJ)30-4LL	R(NJ)3-27AL	W(NJ)1-11A	W1-11 or W1-15		
R(NJ)30-4R (DESIGNATION PRIOR TO 2023)	R3-24aR	W(NJ)2-6	W2-6 & W16-12P		
R(NJ)30-4X	R3-26	W(NJ)3-6A	W3-6		
R(NJ)30-4BL	R3-25aL	W(NJ)3-7B	W(NJ)3-7A		
R(NJ)30-4BR	R3-25aR	W(NJ)4-1	W4-1		
R(NJ)30-5	R(NJ)3-26E	W(NJ)5-5	W8-16		
R(NJ)30-6AL	R3-24bL	W(NJ)5-5A	W8-16		
R(NJ)30-6AR	R3-24bR	W(NJ)5-6	W3-6		
R(NJ)30-6AX	R(NJ)3-28B	W(NJ)7-5	W(NJ)11-10A		